

Los Alamos National Laboratory is operated by the University of California for the United States Department of Energy under contract W-7405 ENG-36

TITLE CHARACTERIZATION OF A RAMPED GRADIENT DTL: EXPERIMENT AND THEORY

AUTHOR(S) K. F. Johnson, E. A. Madlinger, O. R. Sander, G. P. Boicourt, G. O. Bolme, G. N. Fortgang, J. D. Gilpatrick, J. Person, D. P. Sandoval, and V. Yuan

SUBMITTED TO Particle Accelerator Conf., San Francisco, CA, May 6/9, 1991

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

By acceptance of this article, the publisher recognizes that the U.S. Government retains a nonexclusive, royalty-free license to publish or reproduce the published form of this contribution, or to allow others to do so, for U.S. Government purposes.

Los Alamos National Laboratory requests that the publisher identify this article as work performed under the auspices of the U.S. Department of Energy.

Los Alamos

Los Alamos National Laboratory  
Los Alamos, New Mexico 87545

MASTER

# CHARACTERIZATION OF A RAMPED GRADIENT DTL: EXPERIMENT AND THEORY\*

K. F. Johnson, E. A. Wadlinger, O. R. Sander, G. P. Boicourt, G. O. Bolme,  
C. M. Fortgang, J. D. Gilpatrick, J. Merson, D. P. Sandoval, and V. Yuan  
Los Alamos National Laboratory, Los Alamos, NM 87545

## Abstract

An experimental demonstration confirming the beam-dynamics of a Ramped-Gradient Drift-Tube Linac (RGDTL) was performed at Los Alamos National Laboratory. The RGDTL was designed to optimize on the requirements of maximum beam acceleration, minimum longitudinal and transverse emittance growth, and acceptable wall power loss. At low beam energies, transverse magnet focusing is weak and the rf defocusing must be minimized. As the beam energy increases, stronger rf defocusing can be tolerated and the rf electric field gradient can increase. A detailed comparison of theory and experiment was carried out. Beam longitudinal centroids (output energy and phase), transverse and longitudinal emittances were measured as a function of RGDTL rf field amplitude and phase. The longitudinal centroids were also studied as functions of input beam current, energy, and degree of bunching. Comparison between experimental data and theory was found to be in good agreement.

## I. INTRODUCTION

Proton or  $H^-$  Drift-Tube Linacs (DTLs) can achieve accelerating gradients of 4 to 5 MV/m while Radio Frequency Quadrupoles (RFQs) achieve gradients of typically 2 MV/m. It is desirable to provide a transition region between the RFQ (the injector) and the high gradient DTL. This can be accomplished by a field ramp that smoothly connects the two field gradients. The Los Alamos RGDTL was designed to provide this transition region [1]. It automatically matches the beam from a low-velocity low-field gradient device (RFQ) to a high-velocity high-gradient device (DTL). In the design procedure the requirements of maximum beam acceleration, minimum longitudinal and transverse emittance growth, and acceptable wall power loss were optimized.

The RGDTL is a 425-MHz, 1.87-m-long structure containing 29 drift tubes, 14 post couplers, two tuners, and two drive loops. It has an axial electric field gradient that increases from 2.0 MV/m (RFQ gradient) to 4.4 MV/m over 1.5 m for accelerating  $H^-$  from 2.07 MeV (RFQ output energy) to 6.67 MeV. The structure's mechanical design, low-power tuning, and field stabilization measurements are reported in References 2 through 5.

An experimental demonstration validating the beam-dynamics of the RGDTL has been completed on the

Accelerator Test Stand (ATS) [6]. It has shown that a RGDTL with the desired stable field distributions can be built and operated. Characterization of the RGDTL output beam confirmed that simulation codes accurately model the beam-dynamics of moderately bright beams in the RGDTL.

## II. EXPERIMENTAL TECHNIQUE

The  $H^-$  input beam to the RGDTL was from the ATS, 425-MHz, 2.07 MeV RFQ. The ATS was operated at a low duty factor (0.025%).

The experimental objective was to fully characterize the output beam of the RGDTL to allow for a detailed comparison to the simulation codes. To achieve this end, the output beam current, beam transmission, transverse centroids (position and angle in both planes), longitudinal centroids (beam energy and phase), transverse and longitudinal phase-space distributions were measured for a variety of RGDTL operating conditions.

Available diagnostics for these measurements included three toroids and a Faraday cup (beam current and transmission), three capacitive probes [7] (longitudinal centroids), two pairs of slit-collectors (transverse centroids and phase-space distributions), LINDA [8] (longitudinal phase-space distribution), and a x-ray detector [9] (RGDTL rf field).

## III. EXPERIMENTAL RESULTS

At low power, the RGDTL accelerating mode was tuned to 425-MHz, the desired ramped field distribution was achieved, and the field was stabilized against tuning errors. The tuning procedure is given in References 4 and 5 where the parameters to be adjusted, the goals of the adjustments, the tuning mechanisms used, and the various measurement techniques are described in detail.

The RGDTL was operated with dual rf drive loops with a master-slave configuration for amplitude control and independent phase control. The dual drive-loop coupling was determined at low power [10]. With beam the operation of the dual rf drive system was established and shown to be stable and reliable.

The RGDTL rf electric field  $E_0$  on axis can be determined from the energy spectrum of the x-rays generated within the cavity [9]. The x-ray energy spectra were measured versus cavity rf power. These data suggested that  $470 \pm 12$  kW cavity power was necessary to achieve the design axial field which is very close to the power level ( $460 \pm 10$  kW) predicted by SUPERFLASH.

The RGDTL rf amplitude and phase set points were determined using the phase scan technique [11]. This technique utilized the capacitive probes [7] to measure the

\*Work supported in part by the US Department of Defense, Army Research Office-Durham, under the auspices of the US Department of Energy.

energy and phase centroids of the beam as a function of the RGDTL rf amplitude and relative rf phase. A comparison of the data to single-particle simulations provides the signature for determining the operating set-points of the RGDTL. In this procedure, it was assumed that beam centroids are unaffected by space-charge and that the centroid behavior can be predicted by single-particle simulations. Both assumptions are reasonable if the particles in the bunch experience forces that depend on the magnitude of their displacement from the synchronous particle. Figure 1 shows a comparison between experiment and simulation. The data indicate that a cavity power of 448 kW give the desired field. This result is in good agreement with the x-ray data and SUPERFISH calculations.

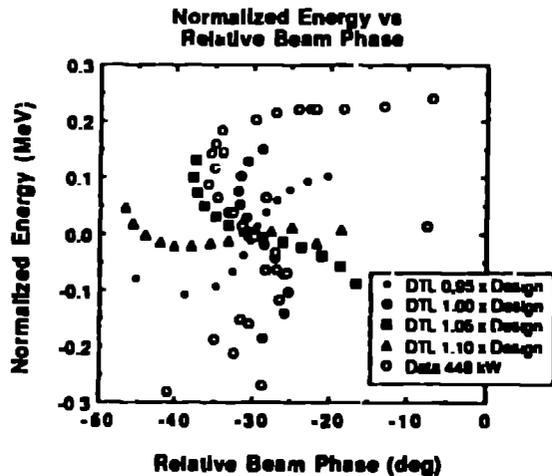


Figure 1. A comparison between RGDTL data at 448 kW and simulations at 0.95, 1.00, 1.05, and 1.10 times design gap voltage. Relative output beam phase is used to facilitate a comparison of curve shapes. The simulations indicate that a cavity power of 448 kW gives fields near design.

Additional phase scans were taken where the input energy to the RGDTL was varied above and below the design input energy. This was accomplished by operating the ATS buncher cavity (located between the RFQ and RGDTL) in its accelerating or decelerating modes. The experimental results were again in good agreement with simulations.

Phase scans were made at both low beam currents ( $\sim 20$  mA) and high beam currents (78 to 80 mA). The rf amplitude and phase set-points, as determined from the phase-scans, were independent of beam current. This supports our assumption that beam centroids were unaffected by space charge.

Operating the RGDTL at its rf amplitude and phase set-points gave  $\sim 97\%$  beam transmission at both high and low beam currents which was as predicted from simulations. For quiet beams, a relative uncertainty of  $\sim 2\%$  on beam transmission measurement was possible.

The RGDTL output beam longitudinal phase-space distributions were measured using a standard slit and collector technique [12]. These measurements were made as functions of RGDTL rf cavity power (five power levels) and rf phase (three settings), and longitudinal match of the input beam.

tested the RGDTL beam dynamics with different space-charge forces, external longitudinal focusing forces, and input phase distributions.

To study longitudinal matching to the RGDTL, data were taken with the ATS rf buncher either off or operating in its bunching, debunching, accelerating, and decelerating modes. The measured Courant-Snyder (CS) parameters of the RGDTL output beam were compared to simulations using the mismatch factor (MMF).  $MMF = 0$  corresponds to achieving the design CS parameters. With the rf buncher off (standard ATS operation), the data and simulations are in good agreement ( $MMF = 0.08$ ). For all rf buncher modes, MMF was less than 0.2, showing that the output beam CS parameters were insensitive to the longitudinal match. In general a practical criteria of  $MMF < 0.3$  is considered to indicate "agreement" with simulations.

The longitudinal emittance of the RGDTL output beam was measured at different RGDTL rf power levels and phases. A comparison of the rms longitudinal emittance at the optimum RGDTL power and phase set-points ( $0.10 \pm 0.02 \pi$  MeV-deg) to a previous measurement of the RFQ rms longitudinal emittance ( $0.08 \pm 0.02 \pi$  MeV-deg) indicates no longitudinal emittance growth in the RGDTL. The error on the emittance measurement is  $\sim 20\%$  and reflects the scatter in the data. Within the limited range of RGDTL rf power and phases explored, the rms longitudinal emittance was shown to be insensitive (within experimental error) to both rf power and phase, as expected.

The RGDTL output beam transverse phase-space distributions (horizontal and vertical) were measured using a standard slit and collector technique [12]. These measurements were made as functions of RGDTL rf cavity power (five power levels) and rf phase (three settings), and longitudinal match of the input beam.

Using the MMF, the measured transverse Courant-Snyder (CS) parameters of the RGDTL output beam were compared to simulations. At the optimum RGDTL rf power and phase set-points there was good agreement between data and simulations. The MMF was 0.30 and 0.08 for the horizontal and vertical planes, respectively. Unlike in the longitudinal plane, large MMF ( $\sim 1$ ) were obtained in both transverse planes for non-optimum RGDTL operating conditions. As expected the output transverse CS parameters were independent of the longitudinal match of the input beam. In the ATS RGDTL experimental configuration, it was not possible to vary the transverse match of the RGDTL input beam.

The rms normalized transverse emittances of the RGDTL output beam was measured at different RGDTL rf power levels and phases. A comparison of the rms transverse emittances at the optimum RGDTL power and phase set-points ( $0.025 \pm 0.002 \pi$  cm mrad horizontal plane and  $0.022 \pm 0.002 \pi$  cm mrad vertical plane) to previous measurements of the RFQ rms transverse emittance ( $0.025 \pm 0.002 \pi$  cm mrad in both planes) indicates no significant emittance growth in the RGDTL. The measured RGDTL emittance values are lower than the previous small beam emittance measurements made prior to the RGDTL experiment. This is expected since

measurements is  $\sim 8\%$  with background subtraction being the dominant component. Within the limited range of RGDTL rf power and phases explored, the transverse emittances were shown to be insensitive (within experimental error) to both rf power and phase, as expected.

The position and angle centroids of the RGDTL output beam were determined from the measured transverse phase-space distributions. They indicated that some small missteering of the beam was occurring in the RGDTL. Later off-line checks of the RGDTL suggested two possible causes. The first was a misaligned quadrupole in the downstream end wall. The second was an internal braze failure which resulted in a water pressure bulge in the end wall. The bulge may have twisted or distorted the half drift-tube which supported the end wall quadrupole.

## V. SUMMARY AND CONCLUSIONS

Commissioning of the RGDTL was a success. The experimentally determined cavity power (two independent techniques) was in good agreement with the theoretical value. Beam transmission was greater than 97% with a maximum output current of 80 mA. Within experimental errors, transverse and longitudinal phase-space measurements do not indicate any emittance growth through the RGDTL. The measured output beam Courant-Snyder parameters are in good agreement with simulations. These results confirm the beam-dynamics predictions and thus validate the design codes and indicate that no major physics has been omitted.

The successful testing of the RGDTL has shown that compact DTLs utilizing ramped fields can be designed, built, and operated. They could be key elements in the high-brightness accelerators that are being considered in many advanced accelerator applications.

## REFERENCES

- [1] G. P. Boucourt and M. C. Vasquez, "Two New Possible Designs for the Ramped ATS DTL," LANL memo AT 6:85-180, November 27, 1985.
- [2] D. J. Liska and E. B. Danielsberg, "A Drift Tube Linac Incorporating a Ramped Accelerating Field," Proc. 1987 IEEE Particle Accelerator Conf., Washington, D.C. (1987) 1797.
- [3] D. J. Liska et al., "A High Intensity Drift Tube Linac with Ramped Accelerating Gradient," Proc. 1988 Linear Accelerator Conf., CEBAF Report-89-001 (June 1989) p. 652.
- [4] J. H. Billen and A. L. Shapiro, "Post-Coupler Stabilization and Tuning of a Ramped-Gradient Drift-Tube Linac," Proc. 1988 Linear Accelerator Conf., CEBAF-Report 89-001 (June 1989) p. 128.
- [5] J. H. Billen, "Analysis of Measured Post-Coupler Fields in a Ramped-Gradient Drift-Tube Linac," Proc. 1988 Linear Accelerator Conf., CEBAF Report 89-001 (June 1989) p. 131.
- [6] O. R. Sander et al., "Review of the Accelerator Test Stand Performance in its Experiments," LANL report LA-CP-89-159, 1989.
- [7] J. D. Gilpatrick, et al., "Synchronous Phase and Energy Measurement System for a 6.7 MeV H- Beam," Proc. 1988 Linear Accelerator Conf., CEBAF-Report-89-001 (June 1989), p. 134.
- [8] W. B. Cottingham, et al., "Noninterceptive Technique for the Measurement of Longitudinal Parameter of Intense H- Beams," Proc. 1985 Particle Accelerator Conference, IEEE Trans. Nucl. Sci. 32(5), (1985), 1871.
- [9] G. O. Bolme, et al., "Measurement of RF Accelerator Cavity Field Levels at High Power from the Characteristic X-ray Emissions," Proc. 1990 Linear Accelerator Conf., LANL report LA-12004-C (March 1991) p. 219.
- [10] C. M. Fortgang and G. O. Bolme, "Dual Loop Drive on the RGDTL," LANL memo AT-2:88-255, June 29, 1988.
- [11] C. M. Fortgang, et al., "Longitudinal Beam Dynamics of a 5-MeV DTL: A Comparison of Theory and Experiment," Proc. 1988 Linear Accelerator Conf., CEBAF-Report-89-001 (June 1989) p. 167.
- [12] O. R. Sander, "Transverse Emittance: Its Definition, Applications, and Measurement," Proc. Accelerator Instrumentation, edited by E. R. Beadle and V. J. Castillo, (AIP Conf. Proc. No. 212, 1989) p. 127.