

UNCLASSIFIED

UNCLASSIFIED

CIC-14 REPORT COLLECTION
REPRODUCTION
COPY

LA-2312
Copy No.

C.3 A

AEC RESEARCH AND DEVELOPMENT REPORT

LOS ALAMOS SCIENTIFIC LABORATORY
OF THE UNIVERSITY OF CALIFORNIA ○ LOS ALAMOS NEW MEXICO

BEHAVIOR OF SOME DELTA-STABILIZED
PLUTONIUM-GALLIUM ALLOYS AT HIGH PRESSURES

VERIFIED UNCLASSIFIED

LMR 6-20-79

LOS ALAMOS NATIONAL LABORATORY



3 9338 00407 4596

UNCLASSIFIED

SECRET
SECRET

LEGAL NOTICE

This report was prepared as an account of Government sponsored work. Neither the United States, nor the Commission, nor any person acting on behalf of the Commission:

A. Makes any warranty or representation, expressed or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this report, or that the use of any information, apparatus, method, or process disclosed in this report may not infringe privately owned rights; or

B. Assumes any liabilities with respect to the use of, or for damages resulting from the use of any information, apparatus, method, or process disclosed in this report.

As used in the above, "person acting on behalf of the Commission" includes any employee or contractor of the Commission, or employee of such contractor, to the extent that such employee or contractor of the Commission, or employee of such contractor prepares, disseminates, or provides access to, any information pursuant to his employment or contract with the Commission, or his employment with such contractor.

SECRET
SECRET

UNCLASSIFIED

0370

LA-2312

~~C-25, METALLURGY AND CERAMICS~~
(M-3679, 22nd Ed., Rev. 1)

C-55, Technology - Plutonium

This document consists of 23 pages

LOS ALAMOS SCIENTIFIC LABORATORY
OF THE UNIVERSITY OF CALIFORNIA LOS ALAMOS NEW MEXICO

REPORT WRITTEN: April 1, 1959

REPORT DISTRIBUTED: June 29, 1959

PUBLICLY RELEASABLE
LANL Classification Group

M. L. ...
10/27/95

Reviewing
Official:

Let dtd 12/21/88 Charles Demos
CLASS OFF

Date:

4/6/89
B. R. ...

BEHAVIOR OF SOME DELTA-STABILIZED
PLUTONIUM-GALLIUM ALLOYS AT HIGH PRESSURES

[Redacted]

by

R. O. Elliott

K. A. Gschneidner, Jr.

MC WNR 30 May 79

Classification changed to UNCLASSIFIED
by authority of the U. S. Atomic Energy Commission,

Per *Topic 1.0591 Rev. CB-W-1 dtd 1-30-64*

By REPORT LIBRARY *J. Haney, 10-14-65*

Contract W-7405-ENG. 36 with the U. S. Atomic Energy Commission

The [redacted] the [redacted] for
authors and [redacted] the opinions

Los Alamos Scientific Laboratory

[Large redacted block]

LOS ALAMOS NATL. LAB. LIBS
3 9338 004 4596

APPROVED FOR PUBLIC RELEASE

UNCLASSIFIED

UNCLASSIFIED

SECRET

METALLURGY AND CERAMICS
M-3679 (22nd Ed., Rev. 1)
LA-2312

Los Alamos Report Library	1-20
ACF Industries, Inc. (Eberington)	21
Aerojet-General Corporation	22-23
Aerojet-General, San Ramon (100-880)	24
Aeroprojects, Inc.	25
Air Force Ballistic Missile Division	26-29
Air Force Cambridge Research Center (CROTR)	30
AFPR, Boeing, Seattle	31
AFPR, Lockheed, Marietta	32-33
AFPR, North American, Canoga Park	34
Air Technical Intelligence Center	35
Alco Products, Inc.	36
American-Standard	37
Argonne National Laboratory	38-43
Assistant Secretary of Defense, R&D	44
Atomic Energy Commission, Washington	45-50
Atomica International	51-52
Avco Manufacturing Corporation (AF 04(645)-30)	53
Babcock and Wilcox Company (NYOO-1940)	54-56
Babcock and Wilcox Company (NYOO-274)	56
Battelle Memorial Institute	57
Bettis Plant (WAPD)	58-61
Bridgeport Brass Company	62
Brookhaven National Laboratory	63-64
Brush Beryllium Company	65
Bureau of Aeronautics	66
BAR, Aerojet-General, Azusa	67
BAR, Convair, San Diego	68
BAR, Grumman Aircraft, Bethpage	69
Bureau of Ordnance	70
Bureau of Ships	71
Chicago Operations Office	72-74
Chicago Patent Group	75
Combustion Engineering, Inc.	76-77
Division of International Affairs (Pennington)	78
Dow Chemical Company (Rocky Flats)	79
duPont Company, Alken	80-82
duPont Company, Wilmington	83
Electric Boat Division	84
Engineer Research and Development Laboratories	85
Franklin Institute of Pennsylvania	86
General Atomic Division	87
General Electric Company (ANPD)	88-90
General Electric Company, Richland	91-102
General Nuclear Engineering Corporation	103
Hanford Operations Office	104
Iowa State College	105
Knolls Atomic Power Laboratory	106-109
Lockland Aircraft Reactors Operations Office	110
M & C Nuclear, Inc.	111
Mallinckrodt Chemical Works	112-117
Marquardt Aircraft Company	118
Martin Company	119
Mound Laboratory	120
National Aeronautics and Space Administration, Cleveland	121
National Bureau of Standards	122
National Lead Company of Ohio	123-124
Naval Air Development Center	125
Naval Air Material Center	126
Naval Air Turbine Test Station	127
Naval Research Laboratory	128
New Brunswick Area Office	129
New York Operations Office	130
Nuclear Development Corporation of America	131
Nuclear Metals, Inc.	132
Oak Ridge Operations Office	133
Office of Naval Research	134
Olin Mathieson Chemical Corporation	135
Patent Branch, Washington	136
Phillips Petroleum Company (NRTS)	137-140
Prairie and Whitney Aircraft Division	141
Sandia Corporation	142
Sylvania-Corning Nuclear Corporation	143
Technical Research Group	144
Thompson Products, Inc.	145
Union Carbide Nuclear Company (ORQDP)	146-147
Union Carbide Nuclear Company (ORNLI)	148-152
Union Carbide Nuclear Company (Paducah Plant)	153
Union Carbide Nuclear Company (Y-12 Plant)	154
USAF Project RAND	155
U. S. Naval Inspector of Ordnance, Lockheed	156
U. S. Naval Postgraduate School	157
University of California Radiation Laboratory, Berkeley	158-159
University of California Radiation Laboratory, Livermore	160-161
Vitro Laboratories	162
Wright Air Development Center	163-169
Technical Information Service Extension (For Official AEC Use)	170-209
ALOO, Paul Ager	210

UNCLASSIFIED

SECRET

09 11 1964
03 10

UNCLASSIFIED
UNCLASSIFIED

ABSTRACT

A number of delta-stabilized plutonium-gallium alloys were subjected to pressures as high as 11,000 atm at 24°C. Transformation pressures and volumes, compressibilities, densities, and hardnesses of these alloys were determined as a function of composition, and the effect of gallium content on the stability of delta plutonium was studied and related to the plutonium-gallium phase diagram.

ACKNOWLEDGMENTS

The authors are grateful to Janet Clark for making the metallographic examinations; to F. E. Colvin and C. E. Westley for helping with some of the experiments and calculations; and to V. O. Struebing and P. McCrossen for preparing the alloys. In addition, they wish to thank the other members of LASL Group CMF-5 for various services; Group CMB-1 for the chemical analysis; and Group CMB-11 for machining the specimens. Lastly, the authors express their appreciation to F. W. Schonfeld and D. S. Hughes for their interest and helpful suggestions.

3-4

03 10

UNCLASSIFIED
UNCLASSIFIED

SECRET
TOP SECRET



UNCLASSIFIED

CONTENTS


	Page
Abstract	3
Acknowledgments	3
Introduction	7
Apparatus and Techniques	8
Results	12
Discussion	19
References	23

TABLE

Table I Summary of High-Pressure Data for Delta-Stabilized Plutonium-Gallium Alloys	13
---	----

FIGURES

Fig. 1. Exploded View of 10-Kilobar High-Pressure Chamber	10
Fig. 2. Assembled View of 10-Kilobar High-Pressure Chamber	11
Fig. 3. Compression Curves of Six Plutonium-Gallium Alloys	14
Fig. 4. Variation of Transformation Pressure and Volume of Transformation as a Function of Composition	15
Fig. 5. Alloy Densities vs Gallium Content	17

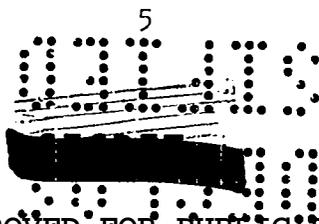

UNCLASSIFIED

J 4870

UNCLASSIFIED

■

SECRET

Page

Fig. 6. Compressibilities and Hardness of Plutonium-Gallium Alloys	18
Fig. 7. Effects of Cycling and of Pressure on the Densities of Several Plutonium-Gallium Alloys	20
Fig. 8. Tentative Plutonium-Gallium Phase Diagram	22

UNCLASSIFIED

6

SECRET


 UNCLASSIFIED
 INTRODUCTION

UNCLASSIFIED

The first studies of the effect of pressure on pure plutonium and plutonium alloys were made by Bridgman in 1945.¹ His data on pure plutonium have been recently declassified and published.² In 1956 Hughes³ made some studies on two delta-stabilized plutonium-gallium alloys. Hughes' results showed that an alloy containing 3.4 a/o gallium underwent an almost completely reversible transformation between 8500 and 9000 atm and that an alloy containing 1.7 a/o gallium underwent an irreversible transformation at approximately 4700 atm.

/ It was hoped that a more detailed investigation of the effect of pressure on the delta-stabilized alloys might provide an explanation for the anomalous expansion behavior of the high-temperature delta phase in pure plutonium. Although such an explanation was not obtained, some interesting correlations between the high-pressure studies and the binary phase diagrams were observed.

To supplement Hughes' data, several more plutonium-gallium alloys and several other binary plutonium alloys were investigated. The results of the current investigation on plutonium-rich alloys containing copper, zinc, cadmium, aluminum, indium, germanium, tin, and cerium have been reported elsewhere.⁴ The results of the investigation of the plutonium-gallium alloys are reported below.

Delta-phase plutonium can be easily retained to room temperature by a proper combination of alloying and heat treatment. / Alloys of this

7

 UNCLASSIFIED

UNCLASSIFIED
 UNCLASSIFIED

UNCLASSIFIED
 01110
 01110

type are generally referred to as delta-stabilized alloys, although the delta phase in many such alloys is actually metastable and will transform to a more stable phase or combination of phases when the alloy is thermally treated or compressed. In the limited range of our apparatus (maximum pressure 11,000 atm), some of the alloys that were studied were found to transform under compression although others did not. The transformation pressures and volumes, compressibilities, densities, and hardnesses of the alloys have been determined and plotted as a function of alloy composition.

APPARATUS AND TECHNIQUES

Alloy ingots were prepared by vacuum-melting and vacuum-casting weighed amounts of the component metals in an induction furnace. The cast ingots were about 1/2 in. in diameter and 1-3/4 in. long. These ingots were homogenized at 450°C for at least 200 hours, air-quenched to room temperature, and then machined to form right cylinders that were 0.434 in. in diameter and from 1.5 to 1.7 in. long. All alloy compositions given in this report are nominal.

All the alloys were subjected to metallographic and X-ray examinations before and after compression. Density measurements were also made before and after compression.* These tests were necessary because several alloys were found to be cored or otherwise inhomogeneous as a

*Precision of density measurements is 0.03 gm/cm³.

UNCLASSIFIED

01110

01110

UNCLASSIFIED

result of being held for insufficient time at the heat-treatment temperature. Such alloys were given further heat treatment for an additional 200 to 400 hours.

The alloys were compressed in the simple piston and cylinder device shown in Fig. 1. The stationary piston was placed in one end of the high-pressure cylinder, and the specimen, glycerine, and movable piston were inserted at the opposite end in that order. The assembly was then fitted into the guide and protecting cylinder, and dial indicators were attached to the movable piston holder and guide.

The assembled apparatus is shown in Fig. 2. Force was applied to the movable piston by means of a 50-ton press. A Baldwin SR-4 load cell was used to measure the load, and the equipment was calibrated for pressure measurements at the solidification points of mercury, 8850 atm and 7.5°C.* The dial indicators located on opposite sides of the high-pressure cylinder made it possible to measure the linear displacement of the movable piston. Volume changes in the specimen, however, could not be obtained directly from the dial-indicator readings because the glycerine compressed, the cylinder expanded, and the pistons shortened under pressure. The data were corrected for the compression of the glycerine using values published by Bridgman,⁵ and for the dimensional changes of the cylinder and pistons using calculations based on elastic theory. The volume measurements determined with this apparatus are estimated to

* Accuracy of pressure measurements is estimated to be 200 atm.

UNCLASSIFIED

UNCLASSIFIED

APPROVED FOR PUBLIC RELEASE

SECRET

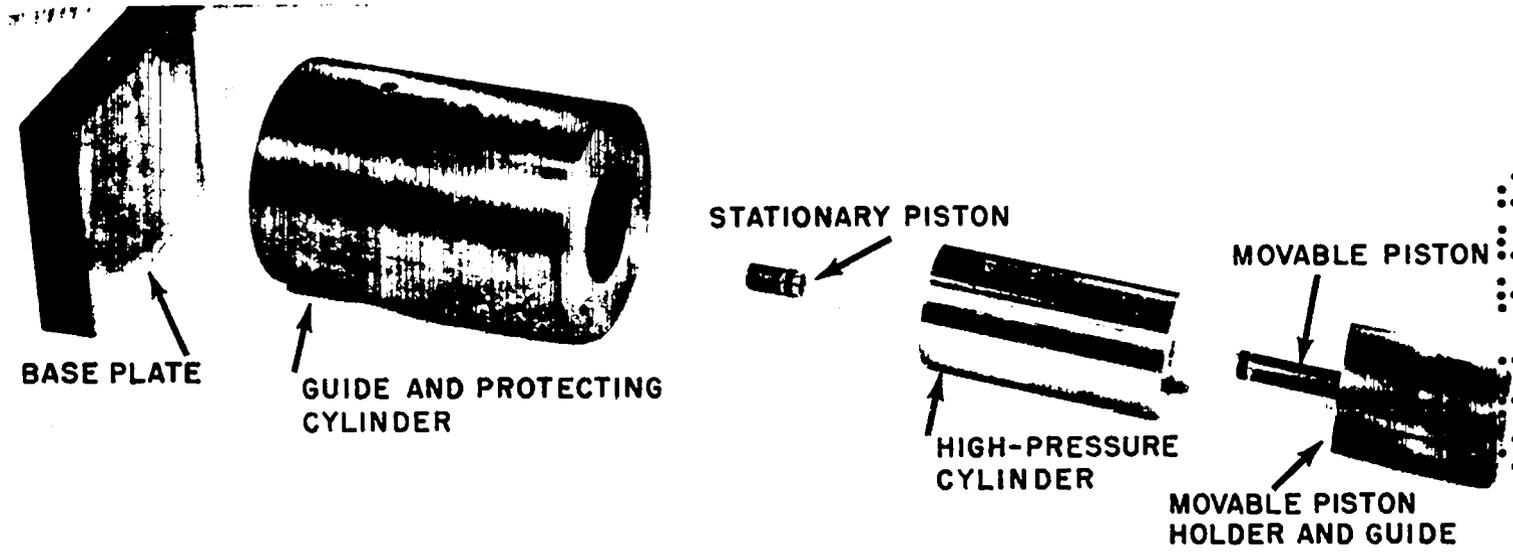


Fig. 1. Exploded View of 10-Kilobar High-Pressure Chamber

UNCLASSIFIED

APPROVED FOR PUBLIC RELEASE

SECRET

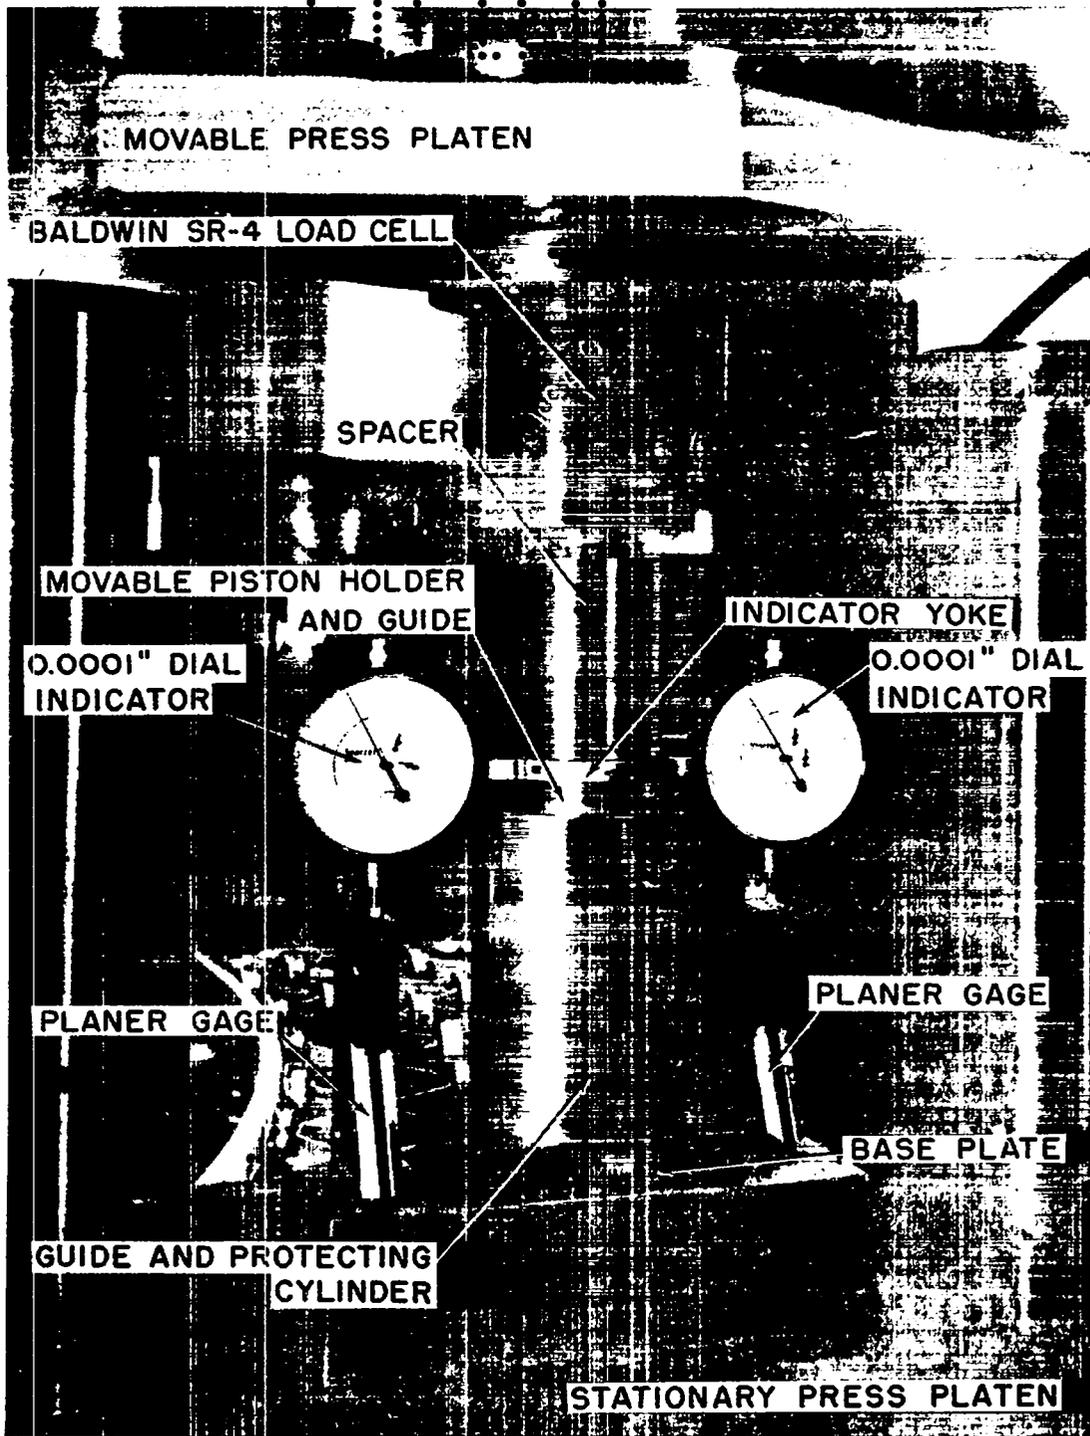


Fig. 2. Assembled View of 10-Kilobar High-Pressure Chamber

UNCLASSIFIED

be accurate to 10 per cent of the value reported. This estimate of the accuracy is based on the results obtained with a pure aluminum standard. All measurements were taken at 24°C.

RESULTS

The results of these compression studies are summarized in Table I. The compression curves of six plutonium-gallium alloys are shown in Fig. 3. It may be noted that the alloy containing 1.7 a/o gallium underwent an irreversible transformation (similar to that reported by Hughes³), and that the transformation in alloys having higher gallium content tended to become more reversible with increasing gallium content; i.e., the extent of reversibility increased. These irreversible transformations have been found to result from the change of metastable delta plutonium into alpha, or alpha plus a small amount of beta, with some untransformed delta usually remaining after compression. The amount of the delta phase remaining after compression increases with increasing gallium content. These data are in agreement with the results reported earlier by Hughes.³ Figure 4 shows the variation of the transformation pressure and volume of transformation as a function of composition. The intersection of the transformation-pressure curve with the composition axis at about 0.6 a/o gallium indicates that this composition represents the minimum amount of gallium that is required to retain delta phase to room temperature under the heat-treatment conditions that were used. This interpretation has been verified for the plutonium-aluminum alloys.⁴

UNCLASSIFIED

12

TABLE I. Summary of High-Pressure Data for Delta-Stabilized Plutonium-Gallium Alloys

Compo- sition (a/o Ga)	Max. Press. (atm)	Trans. Press. (atm)	Vol. of Trans. (%)	Permanent Vol. Change ^a (%)	Compressi- bility x 10 ⁶ (atm ⁻¹)	Density after Heat Treatment (gm/cm ³)	
						Before Compress.	After Compress.
1.7	9,100	2,810	16.7	16.0	3.6	15.81	18.81
2.5	10,000	6,360	12.0	8.7	3.6	15.78	17.57
3.5	10,600	8,140	10.3	3.9	3.3	15.72	16.43
3.75	11,000	8,700	8.8	3.1	3.8	15.75	16.10
4.0	10,060	b	-	-	4.1	15.73	15.76
5.0	8,920	b	-	-	3.7	15.70	15.84
10.0	9,100	b	-	-	3.7	15.24	15.55

^a Values listed in this column were obtained by extrapolating the pressure-volume curves to 1 atm.

^b No transformation was observed in these alloys.

APPROVED FOR PUBLIC RELEASE

UNCLASSIFIED

APPROVED FOR PUBLIC RELEASE

UNCLASSIFIED

UNCLASSIFIED

03130
03700

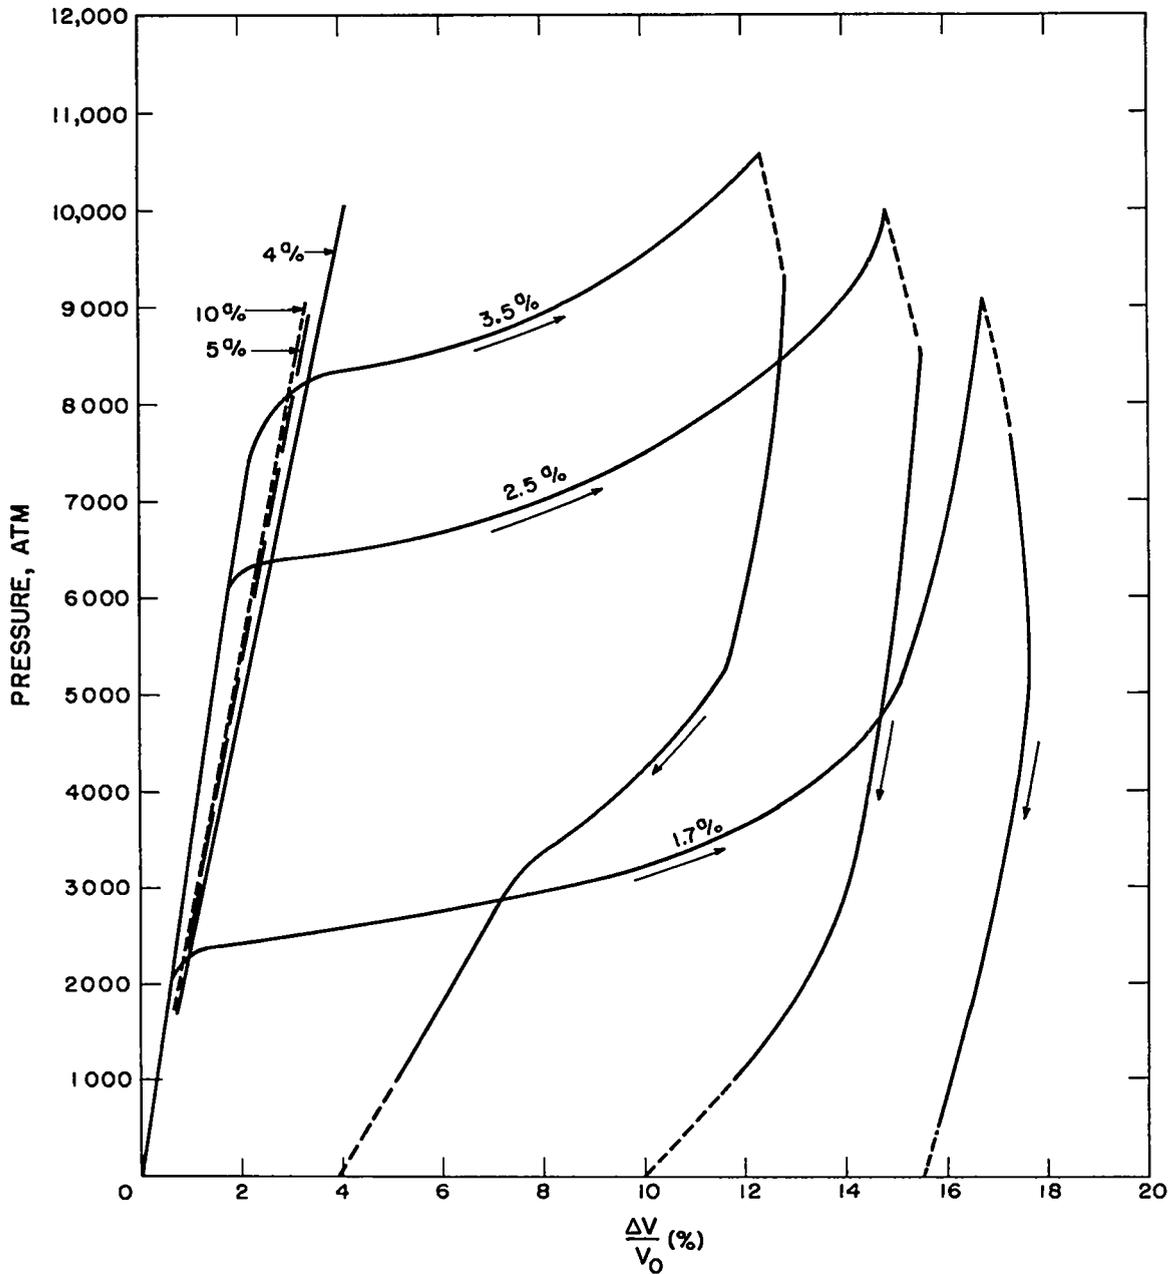


Fig. 3. Compression Curves of Six Plutonium-Gallium Alloys

UNCLASSIFIED

03130
03700

SECRET

UNCLASSIFIED

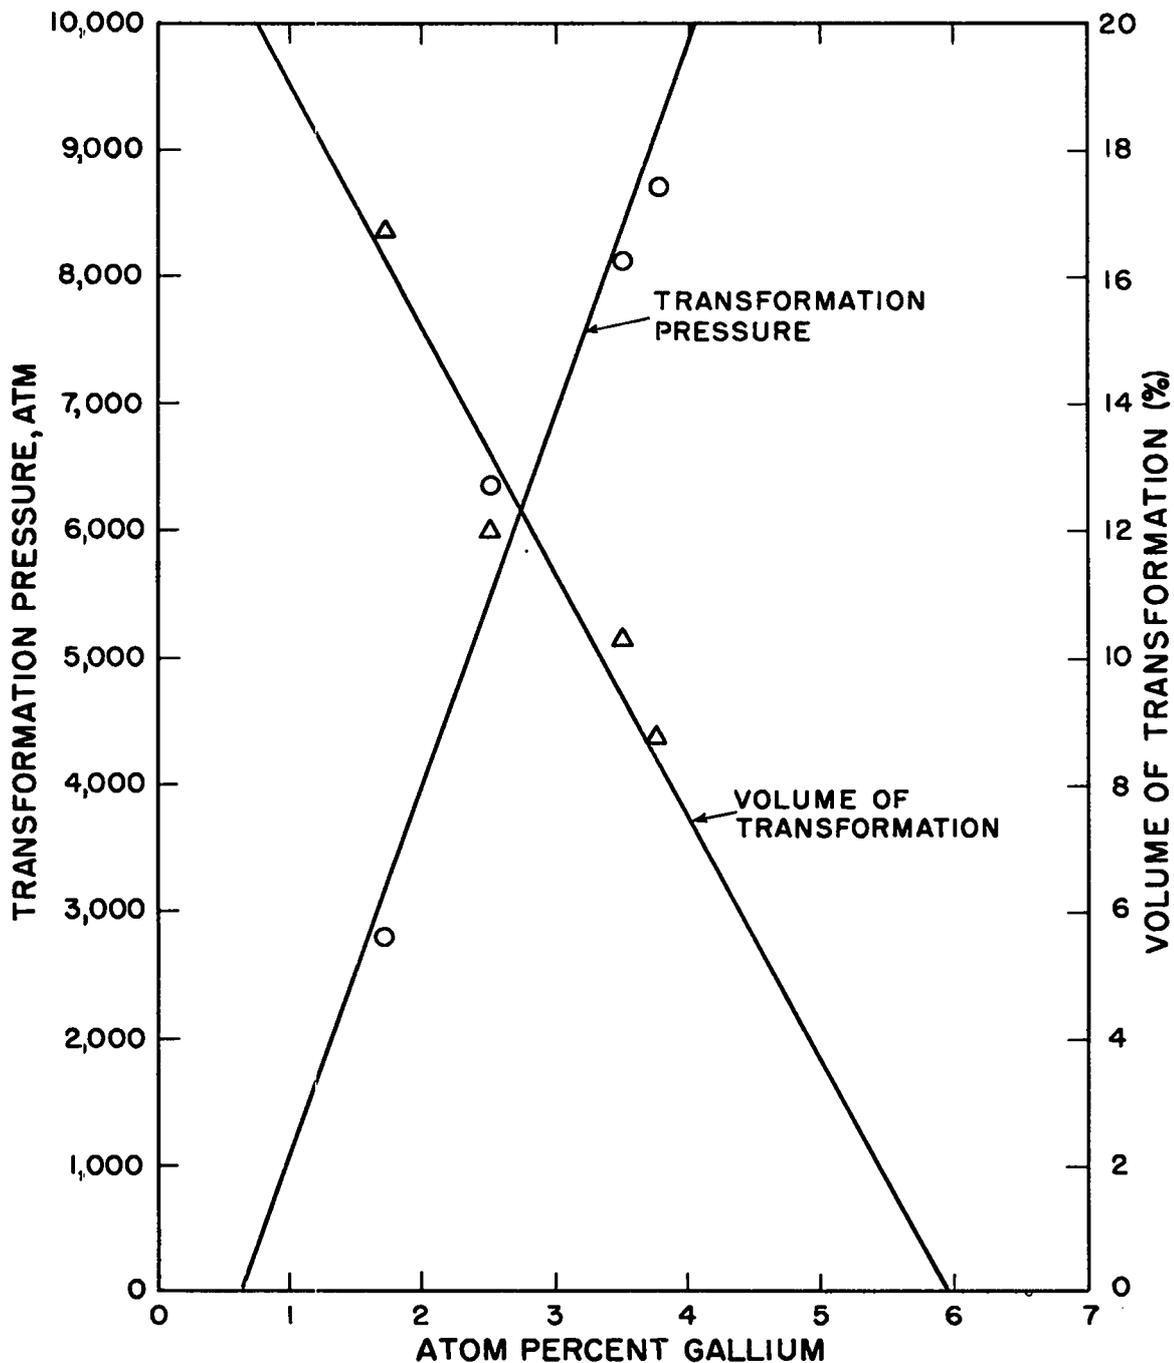


Fig. 4. Variation of Transformation Pressure and Volume of Transformation as a Function of Composition

15
SECRET

UNCLASSIFIED

UNCLASSIFIED

Figure 5 shows the densities of the alloys plotted against their gallium content. The intersection of the after-compression curves at 4.0 a/o gallium is interpreted to mean that all alloys containing less than 4.0 a/o gallium are metastable and should be expected to undergo some transformation reversibility, and that alloys containing more than 4.0 a/o gallium should be thermodynamically stable at room temperature and should undergo a completely reversible delta-to-alpha transformation. Although transformations were not observed for alloys containing more than 3.75 a/o gallium (probably because of the pressure limitation of the apparatus), the above interpretation is believed to be correct because the plutonium-cerium alloys that were studied showed complete reversibility at cerium compositions greater than that indicated at the intersection of the after-compression density curves.⁴

The compressibilities and hardnesses of the gallium alloys before and after compression are shown in Fig. 6. The amount of gallium appears to have little or no effect on the compressibility of the delta phase over the composition range for which measurements were taken. It should be noted that the compressibilities are believed to be accurate to $1.0 \times 10^{-6} \text{ atm}^{-1}$. The after-compression hardness is seen to decrease rapidly with increasing gallium content until the composition of about 3.5 a/o gallium is attained. For alloys containing more than this amount of gallium only slight hardness changes occurred. The 3.5 a/o value is seen to agree reasonably well with the value obtained from the

UNCLASSIFIED

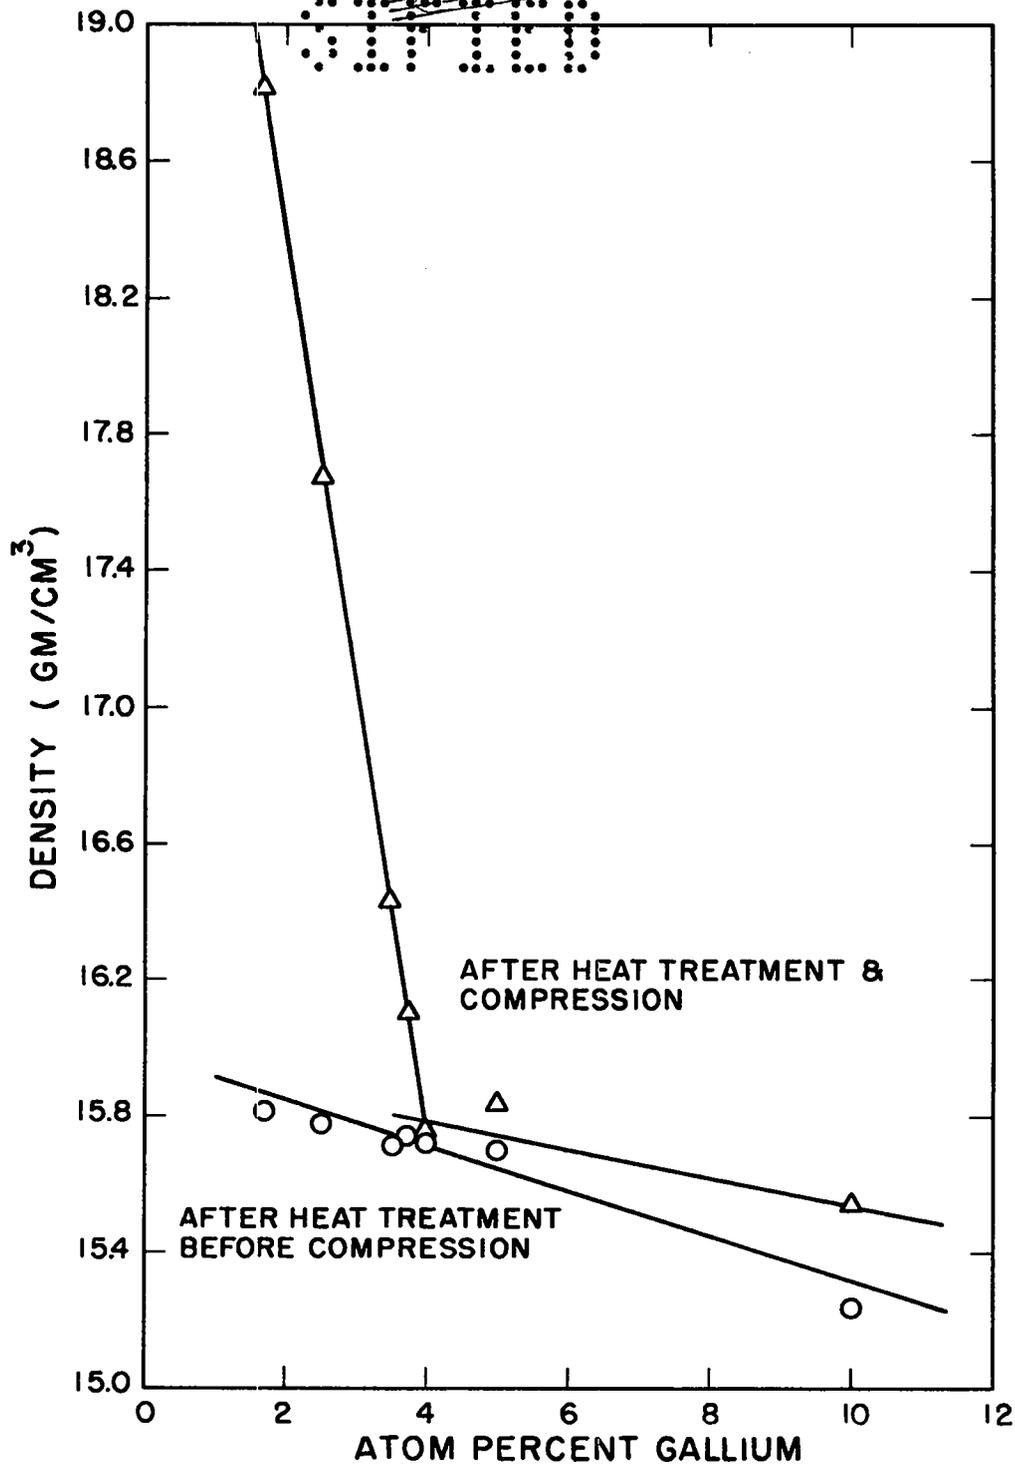


Fig. 5. Alloy Densities vs Gallium Content

UNCLASSIFIED

03113
04713



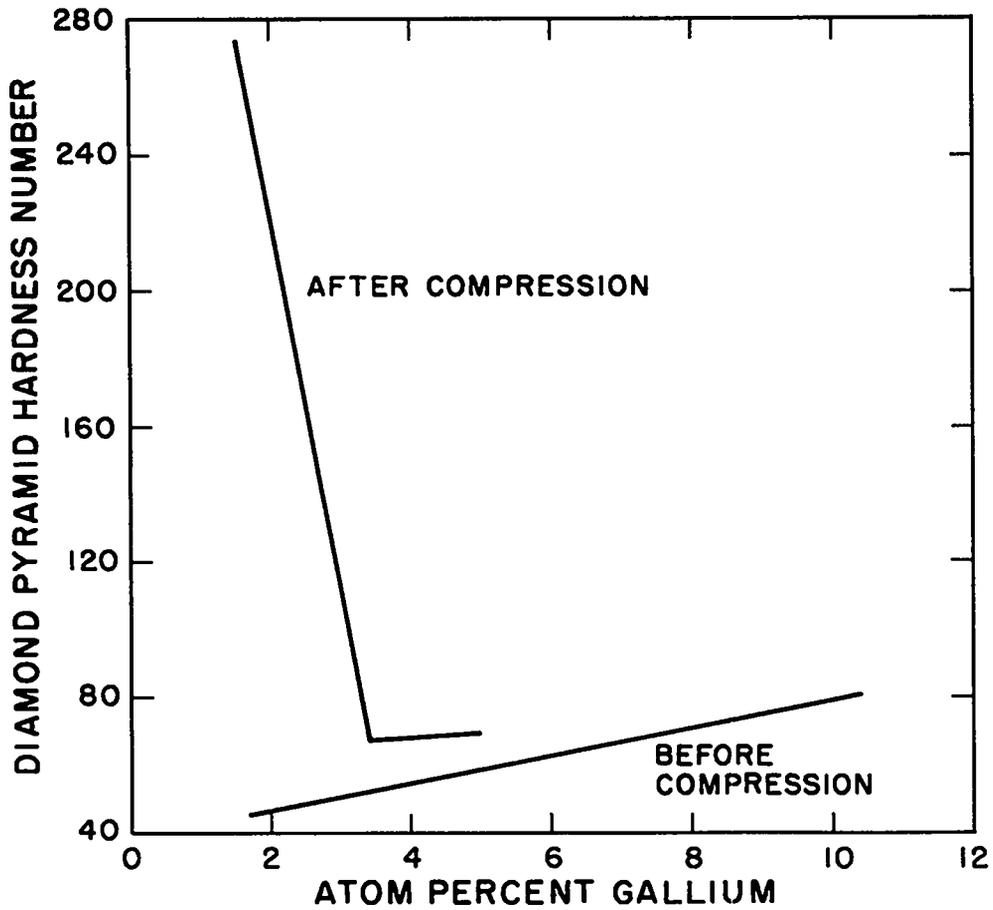


Fig. 6. Compressibilities and Hardnesses of Plutonium-Gallium Alloys

UNCLASSIFIED

03113
04713

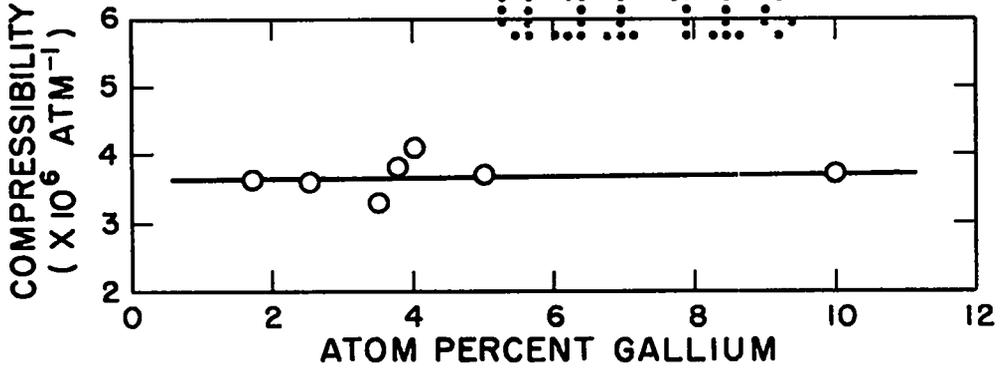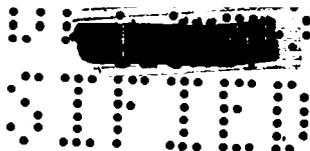


UNCLASSIFIED

after-compression density curves (see Fig. 5). Without doubt, the value from the density curves is the more reliable.

The effects of cycling and of pressure on the densities of some of the alloys are shown in Fig. 7. For the 2.5 a/o gallium alloy the density is seen to increase linearly to a certain point as the number of cycles is increased. Beyond that point the density, for all practical purposes, remains constant. For the 3.5 a/o gallium alloy, the cycling experiment was not continued long enough to find the leveling-off point. Figure 7 also shows that the density increases with increased pressure. However, above some certain but undetermined pressure the increase in density would be expected to reach a maximum and then remain constant. The increase in density with increasing pressure indicates that the transformation becomes more irreversible as the pressure increases. It is expected that cycling and pressure would have no effect on alloys containing more than 4.0 a/o gallium. If this were not true, then the transformation in these alloys would not be truly reversible.

DISCUSSION

Some interesting correlations can be inferred from these studies. If the alloy composition indicated at the intersection of the density curves (4.0 a/o gallium) as shown in Fig. 5 can be assumed not to change with pressure, then this composition should indicate a point lying on the delta/delta-plus-alpha solvus line (at room temperature and pressure) for the plutonium-gallium phase diagram. This value (4.0 a/o gallium)

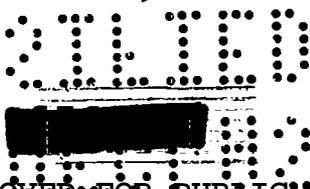

UNCLASSIFIED

03170

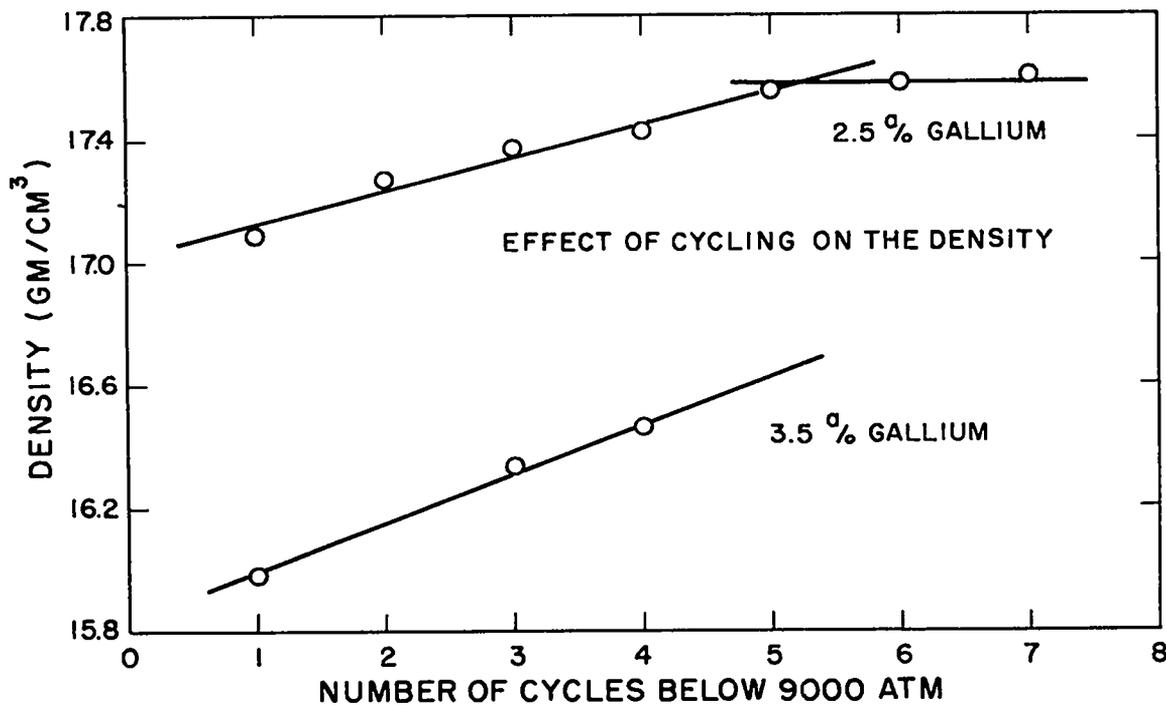
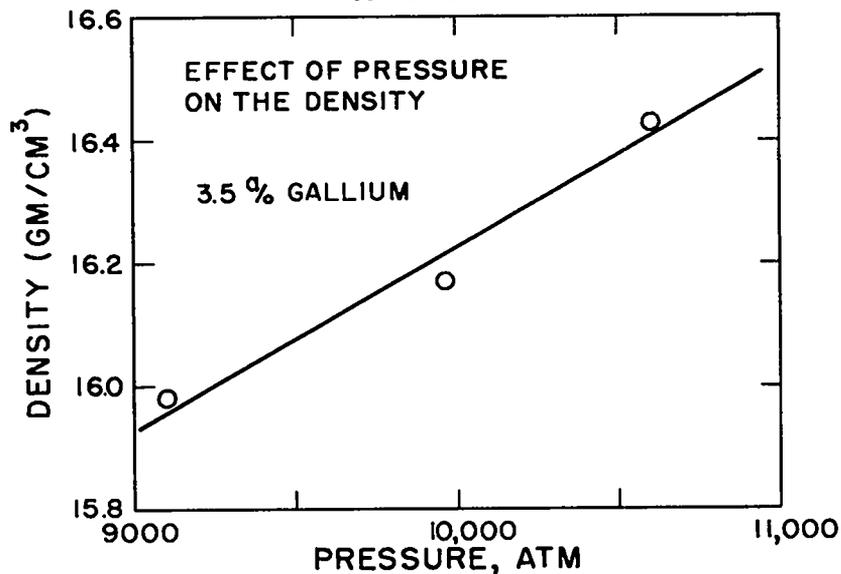


Fig. 7. Effects of Cycling and of Pressure on the Densities of Several Plutonium-Gallium Alloys

03170²⁰

SECRET

UNCLASSIFIED

agrees reasonably well with the value of 5.0 ± 2.0 a/o gallium, which was obtained by extrapolating X-ray and density data from 200 to 250°C to room temperature in a study of the plutonium-gallium system. A tentative plutonium-gallium phase diagram is shown in Fig. 8 (Ref. 6).

One of the authors (K.A.G.) has calculated that, at elevated temperature, delta plutonium will transform to either the gamma or the delta-prime phase at 1300 atm; i.e., at pressures greater than 1300 atm no delta phase can be formed regardless of the temperature. As mentioned earlier, the delta phase in alloys containing more than 4.0 a/o gallium will transform reversibly to alpha plutonium. The pressures required to bring about this reversible transformation in alloys containing 4.0 a/o gallium must be at least 9900 atm, and for greater gallium content the pressure will be accordingly higher. Thus the addition of gallium to plutonium has the effect of extending the delta-field pressure-wise, which is similar to the effect produced by gallium in extending the delta-field temperature-wise (see Fig. 8).

SECRET

UNCLASSIFIED

APPROVED FOR PUBLIC RELEASE

SECRET

UNCLASSIFIED

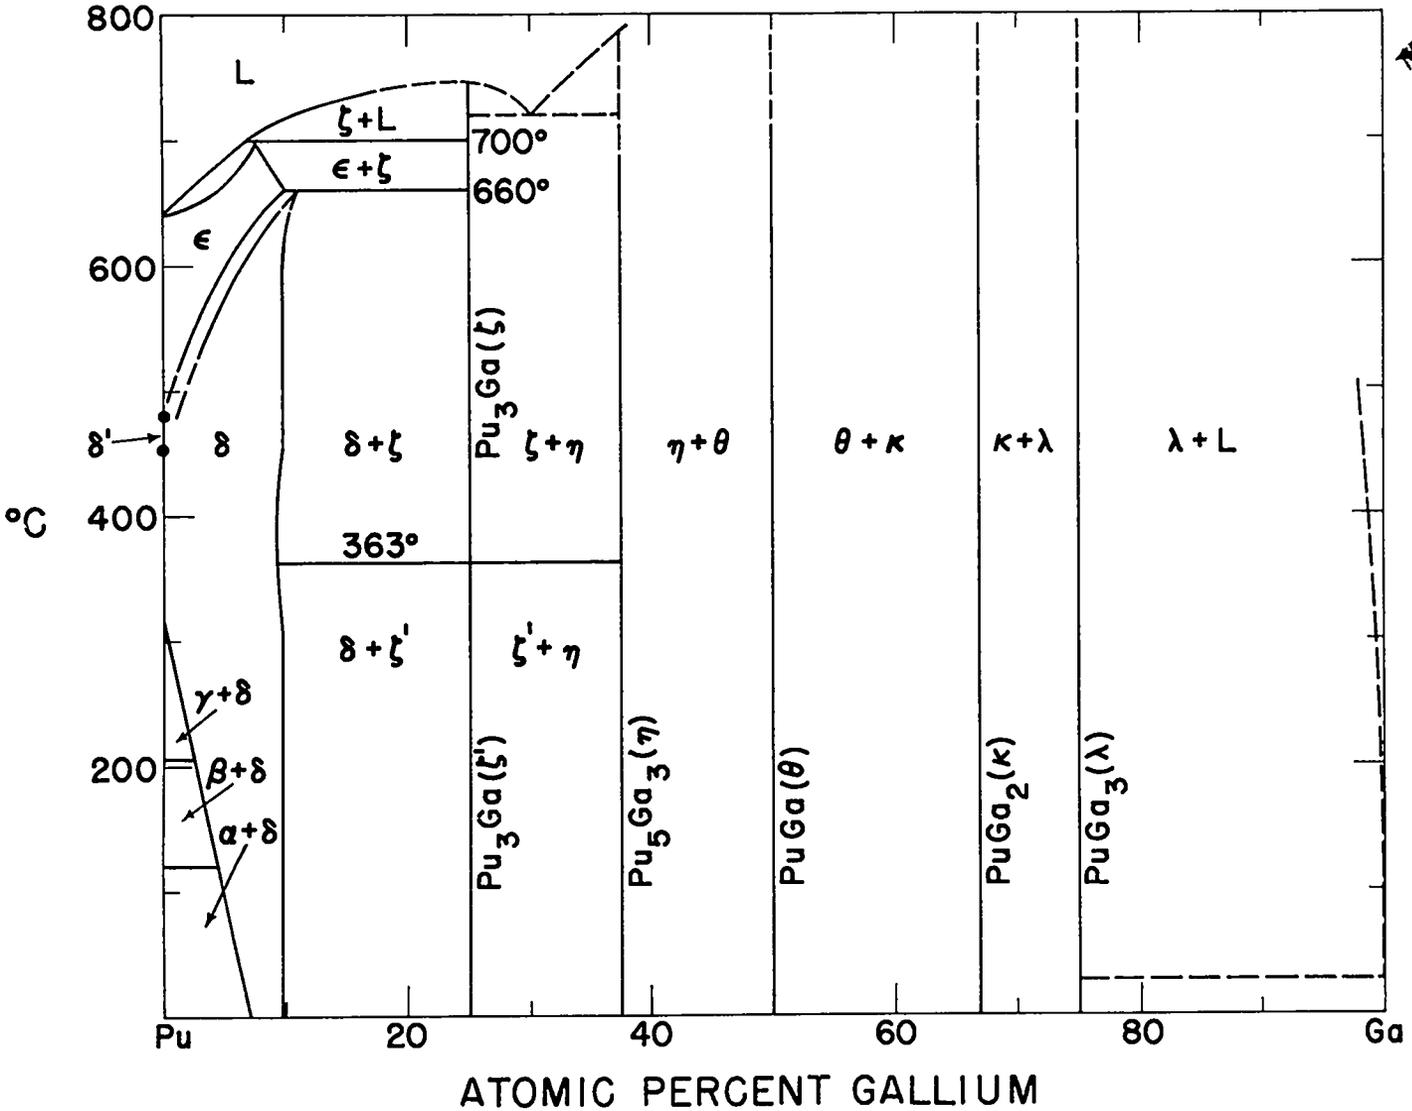


Fig. 8. Tentative Plutonium-Gallium Phase Diagram

UNCLASSIFIED

SECRET

APPROVED FOR PUBLIC RELEASE


SECRET

UNCLASSIFIED

REFERENCES

1. H. L. Laquer, "Bridgman's High Pressure Studies, 1944-1945," Los Alamos Scientific Laboratory Report, Nov. 20, 1953 (not available).
2. P. W. Bridgman, "Compression and the α - β Phase Transition of Plutonium," J. Appl. Phys., 30, 214 (1959).
3. D. S. Hughes, "Transformation of Delta-Phase Plutonium Under Pressure," Los Alamos Scientific Laboratory Internal Report, ca. 1956.
4. R. O. Elliott and K. A. Gschneidner, Jr., "The Behavior of Some Delta-Stabilized Plutonium Alloys at High Pressure," paper given at AIME Annual Meeting, San Francisco, California, February, 1959.
5. P. W. Bridgman, The Physics of High Pressure, 2nd ed., G. Bell and Sons, Ltd., London, 1952.
6. F. H. Ellinger, Los Alamos Scientific Laboratory. Private communication, 1959.

SECRET

UNCLASSIFIED