LA-UR- 02-6264

Approved for public release; distribution is unlimited.

Title: Neutron Electric Dipole Movement

Author(s): R.E. Mischke, P-25, LANL

Submitted to: SPIN2002
Brookhaven National Laboratory

LOS ALAMOS NATIONAL LABORATORY
3 9338 01054 6702

Los Alamos
NATIONAL LABORATORY

Los Alamos National Laboratory, an affirmative action/equal opportunity employer, is operated by the University of California for the U.S. Department of Energy under contract W-7405-ENG-36. By acceptance of this article, the publisher recognizes that the U.S. Government retains a nonexclusive, royalty-free license to publish or reproduce the published form of this contribution, or to allow others to do so, for U.S. Government purposes. Los Alamos National Laboratory requests that the publisher identify this article as work performed under the auspices of the U.S. Department of Energy. Los Alamos National Laboratory strongly supports a[illegible]mic freedom and a researcher's right to publish; as an institution, however, the Laboratory does not endorse the viewpoint of a publicatio[illegible]uarantee its technical correctness.

Form 836 (8/00)

NEUTRON ELECTRIC DIPOLE MOMENT

Presentation at Symmetries and Spin Session

SPIN2002

Brookhaven National Laboratory

R. E. Mischke

LANL

11 September 2002

EDM: A sensitive test of symmetry

$\vec{d} \cdot \vec{E}$

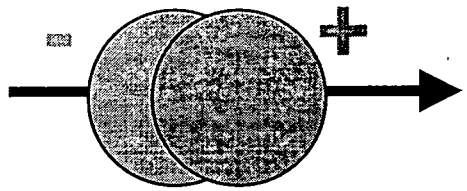

s = 1/2

A permanent neutron EDM requires

Parity and Time Reversal Violation

T Violation implies C P Violation, which is linked to the

Baryon Asymmetry of the Universe

Sources of C P Violation

Standard Model	$d_n < 10^{-31}$ e cm
Super Symmetric Extension	$d_n < 10^{-25}$ e cm
Strong C P Problem	$d_n < 10^{-26}$ e cm
Electroweak baryogenesis	$d_n < 10^{-26}$ e cm

Previous and projected results

LIMIT(e-cm)	CL%	LAB	year
$<1.2 \times 10^{-25}$	95	ILL	'90
$<0.97 \times 10^{-25}$	90	PNPI	'96
$<0.63 \times 10^{-25}$	90	ILL	'99
projected:			
$<1 \times 10^{-26}$	90	ILL	'04
$<5 \times 10^{-28}$	90	PSI	'05?
$<2 \times 10^{-28}$	90	LANL, ILL	'10

Larmor Spin Precession

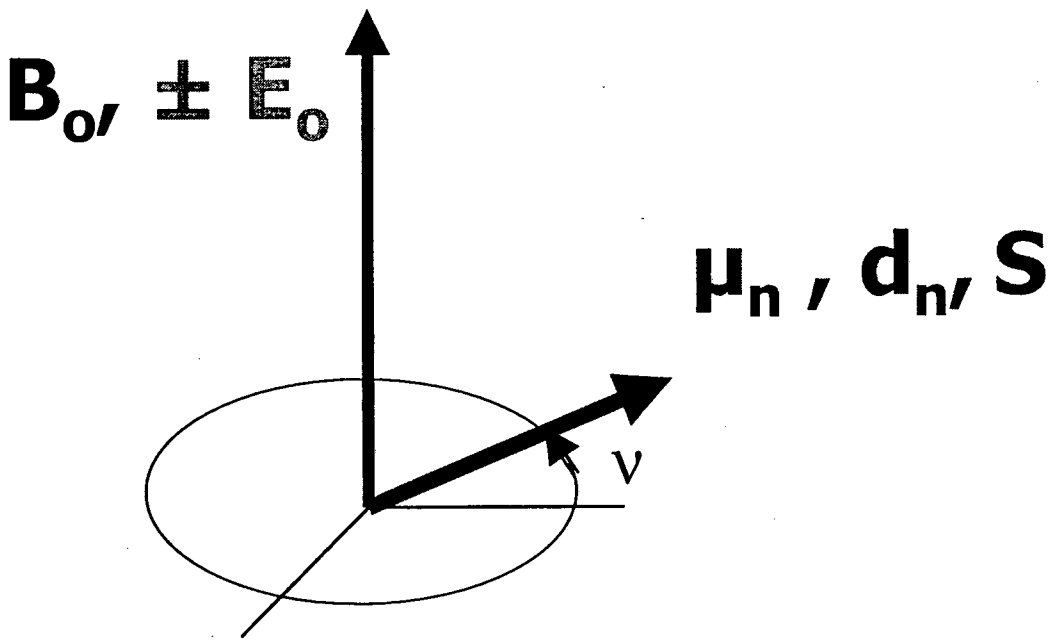

$B \sim 10^{-3}$ gauss

$\nu \sim 3$ Hz

$\Delta\nu \sim 2.6$ μHz

$$\nu(\text{parallel}) = -\left[\, 2\, \boldsymbol{\mu_n} B_o + 2\, \mathbf{d_n} E_o \,\right] / h$$

$$\Delta\nu = \nu(\text{parallel}) - \nu(\text{antiparallel}) = -4\, E_o\, \mathbf{d_n} / h$$

ILL Experiment: layout

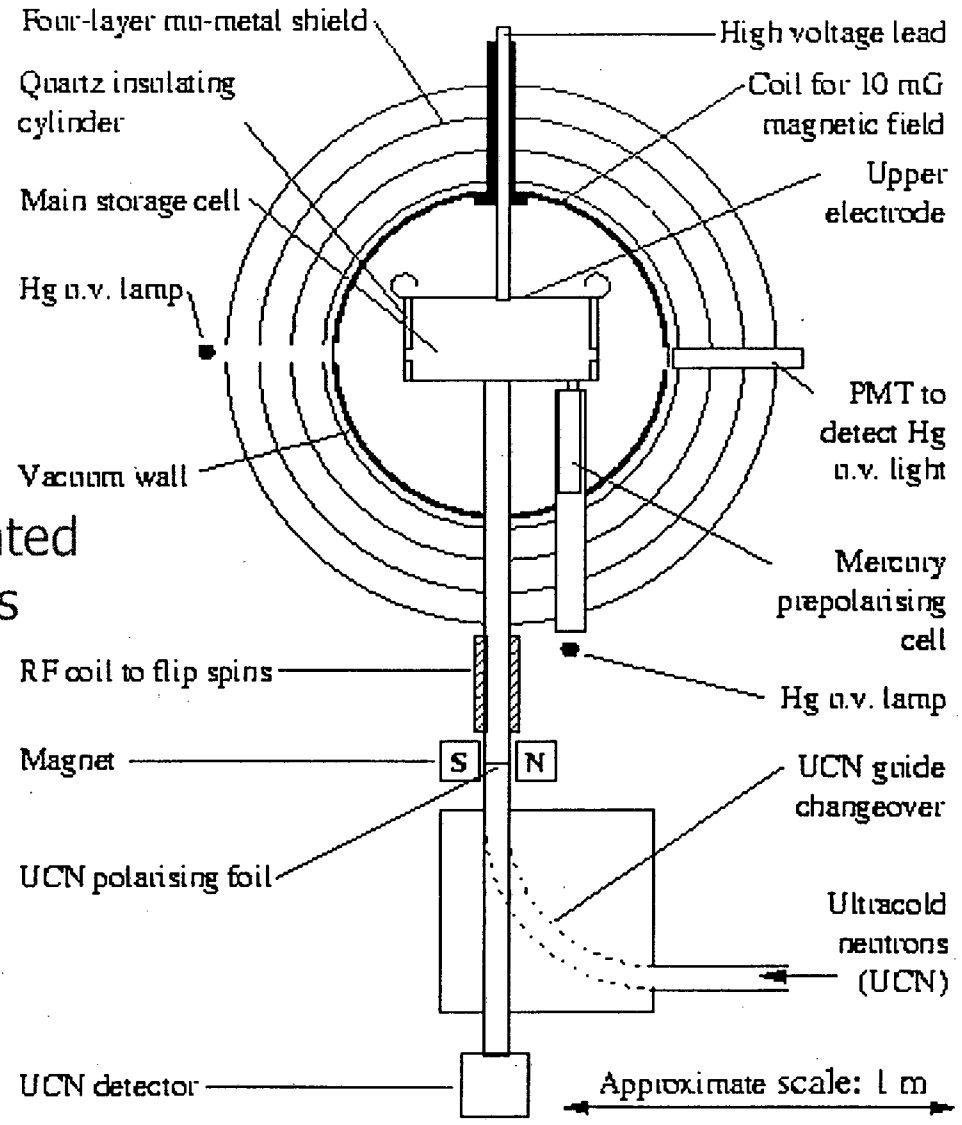

Ramsey separated oscillating fields

Hg comagnetometer

ILL Experiment

P. G. Harris,* C. A. Baker, K. Green, P. Iaydjiev,† and S. Ivanov‡
Rutherford Appleton Laboratory, Chilton, Didcot, Oxon OX11 0QX, United Kingdom

D. J. R. May, J. M. Pendlebury, D. Shiers, K. F. Smith, and M. van der Grinten
University of Sussex, Falmer, Brighton BN1 9QJ, United Kingdom

P. Geltenbort
Institut Laue-Langevin, BP 156, F-38042 Grenoble Cedex 9, France

Improvements

- UCN flux by improved transport
- UCN storage with better wall coatings
- Increased E field with shorter cell

PSI Experiment: layout

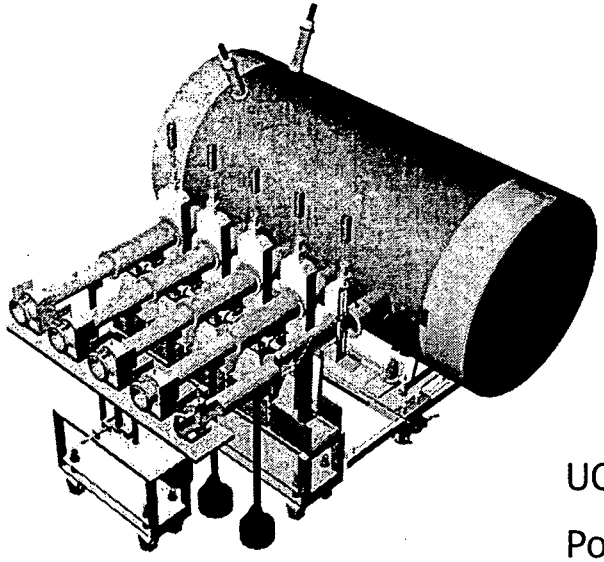

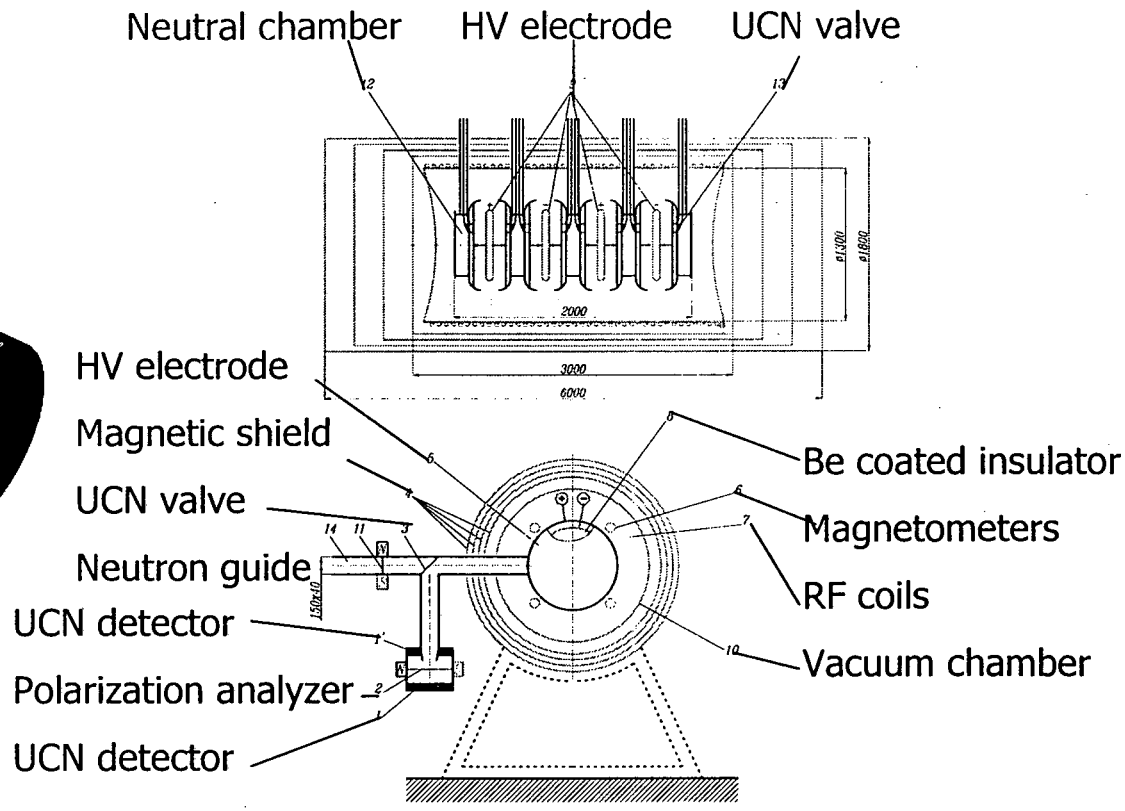

PSI Experiment

E. Alexandrov[6], F. Atchison[2], M. Balabas[6], G. Bison[3], K. Bodek[5], B. Van den Brandt[2], M. Daum[2], A. Dovator[6], A. Fomin[1], P. Geltenbort[4], P. Hautle[2], R. Henneck[2], S. Kalinin[1], K. Kirch[2], T. Konter[2], I. Krasnoshokova[1], M.Lasakov[1], V. Marchenkov[1], A. Murashkin[1], A. Pazgalev[6], I. Potapov[1], M. Sazhin[1], U. Schmidt[7], G. Shmelev[1], I. Shoka[1], R. Taldaev[1], V. Varlamov[1], A. Vasiliev[1], A. Vershovskii[6], A. Weis[3], N. Yakobson[6]

R-00-05, GATCHINA [1] – PSI [2] – FRIBOURG [3] – ILL [4] – CRACOW [5]– St. PETERBURG [6] – HEIDELBERG [7]

Features:

- Solid D2 source for UCN
- Paired volumes
- Active magnetic shielding

LANL Experiment: layout

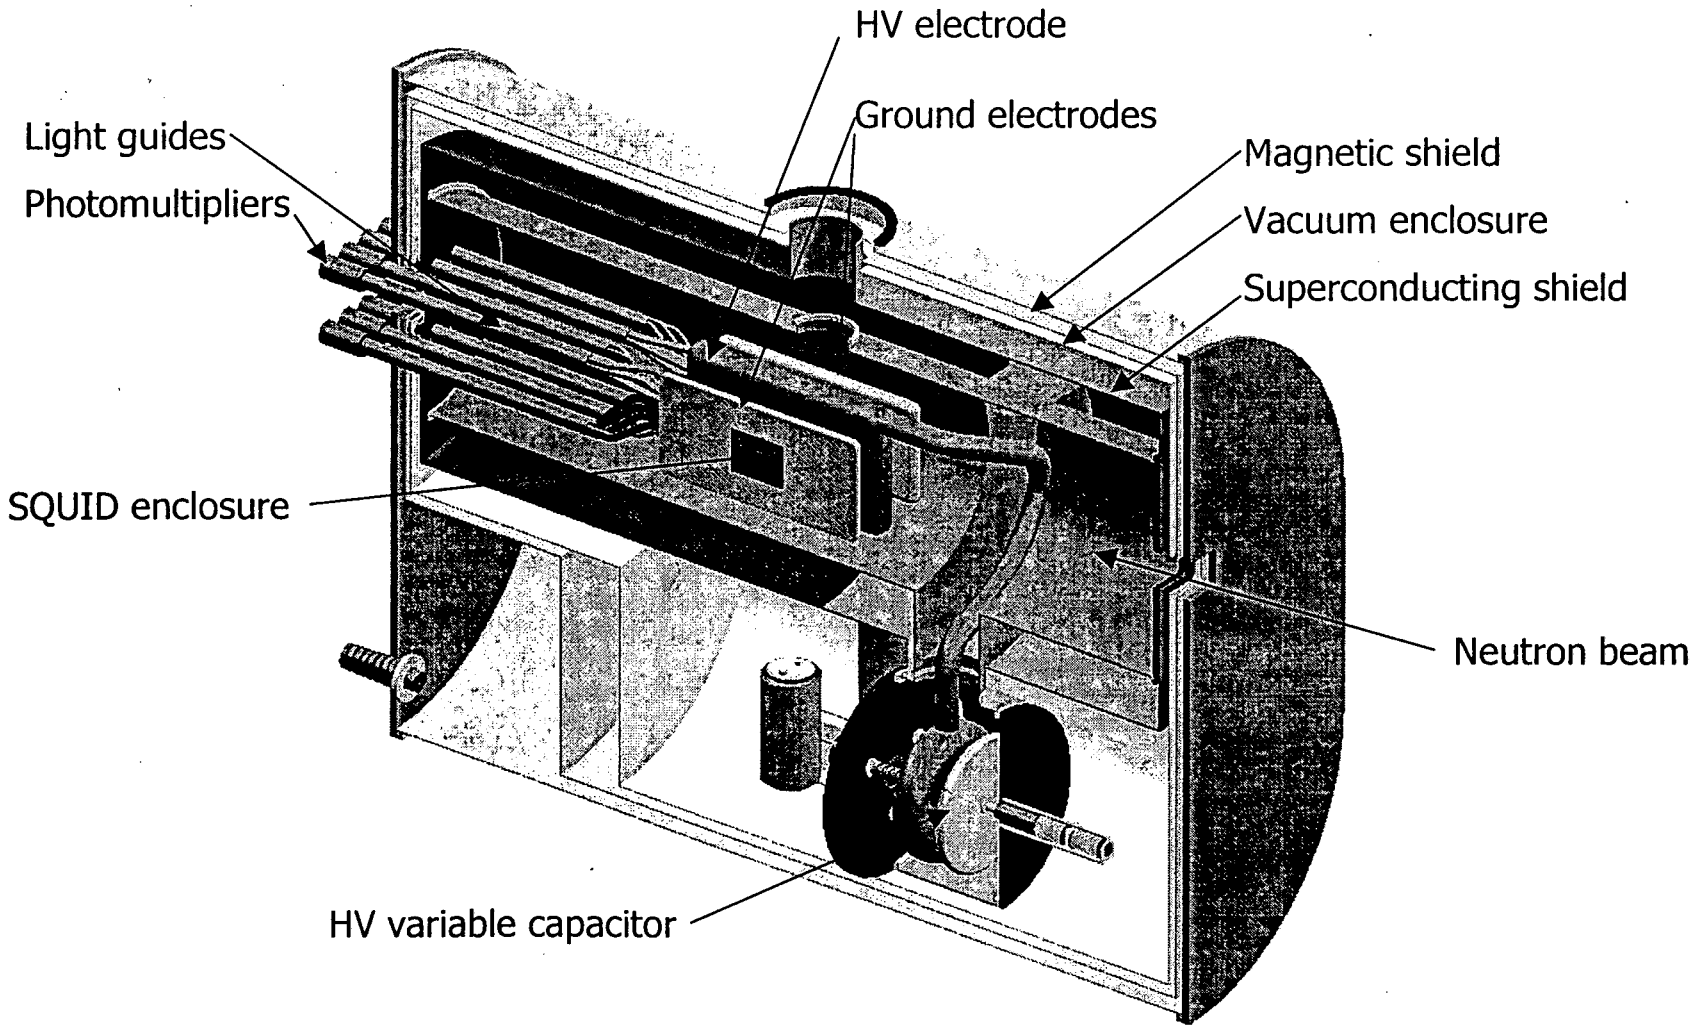

Collaboration

D. Budker, A. Sushkov, V. Yashchuk
University of California at Berkeley, Berkeley, CA 94720, USA
B. Filippone, T. Ito, R. McKeown
California Institute of Technology, Pasadena, CA 91125, USA
R. Golub, K. Korobkina
Hahn-Meitner Institut, D-14109 Berlin, Germany
J. Doyle
Harvard University, Cambridge, MA 02138, USA
D. Beck, D. Hertzog, P. Kammel, J.-C. Peng, S. Williamson
University of Illinois, Urbana-Champaign, IL 61801, USA
J. Butterworth
Institut Laue-Langevin, BP 156 - 38042 Grenoble Cedex 9, France
G. Frossati
University of Leiden, NL-2300 RA Leiden, The Netherlands
P. Barnes, J. Boissevain, M. Cooper, M. Espy, S. Lamoreaux, A. Matlachov, R. Mischke, S. Penttila, J. Torgerson
Los Alamos National Laboratory, Los Alamos, NM 87545, USA
E. Beise, H. Breuer, P. Roos
University of Maryland, College Park, MD 20742, USA
D. Dutta, H. Gao
Massachusetts Institute of Technology, Cambridge, MA 02139, USA
T. Gentile, P. Huffman
National Institute of Standards and Technology, Gaithersburg, MD 20899, USA
A. Babkin, R. Duncan
University of New Mexico, Albuquerque, NM 87131, USA
V. Cianciolo
Oak Ridge National Laboratory, Oak Ridge, TN 37831, USA
M. Hayden
Simon-Fraser University, Burnaby, BC, Canada V5A 1S6

LANL Experiment

Features

- Create UCN in place in ^{4}He
- ^{3}He comagnetometer
- HV for E field generated internally
- SQUIDs to detect ^{3}He spin precession
- ^{3}He capture/^{4}He scintillation detection

Experimental Challenges

Distribution of ^3He in ^4He cell	1 %
Uniformity of B Field	0.1 %
Uniformity of E Field	1.0 %
SQUID noise	3 $\mu\Phi_0/Hz^{1/2}$

Neutron Beam

Velocity Filter	=	Chopper & TOF cut
Gamma Filter	=	Bi Absorber
Spin Filter	=	Silicon Super-mirror Polarizer

E field contours

10 cm plate

30 cm shell

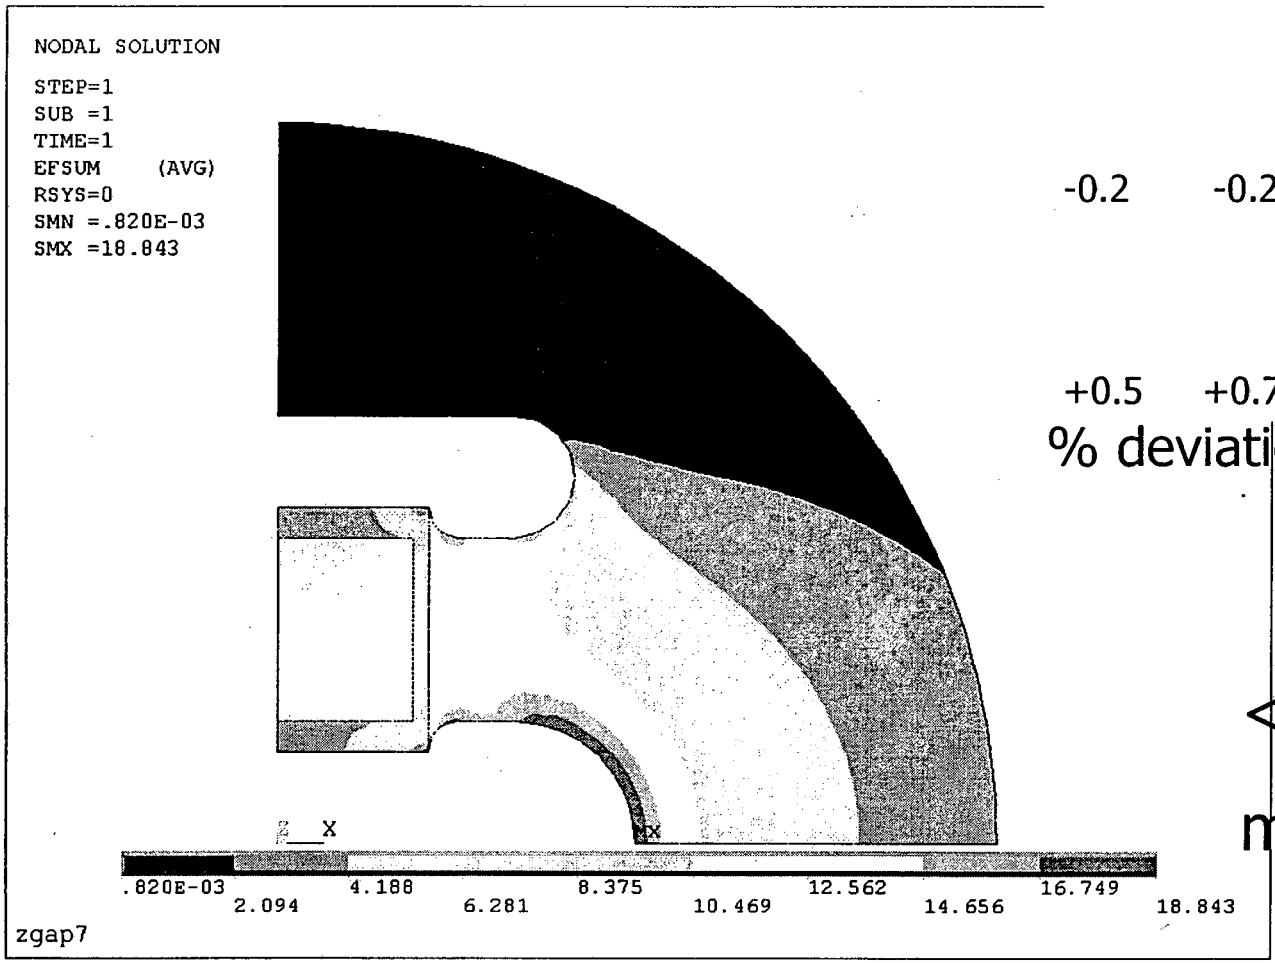

-0.7	-0.8	-1.1
-0.2	-0.2	+0.6
+0.5	+0.7	+1.2

% deviation in cell

< 1% variation

max/gap = 1.6

B_x contours with cosθ magnet

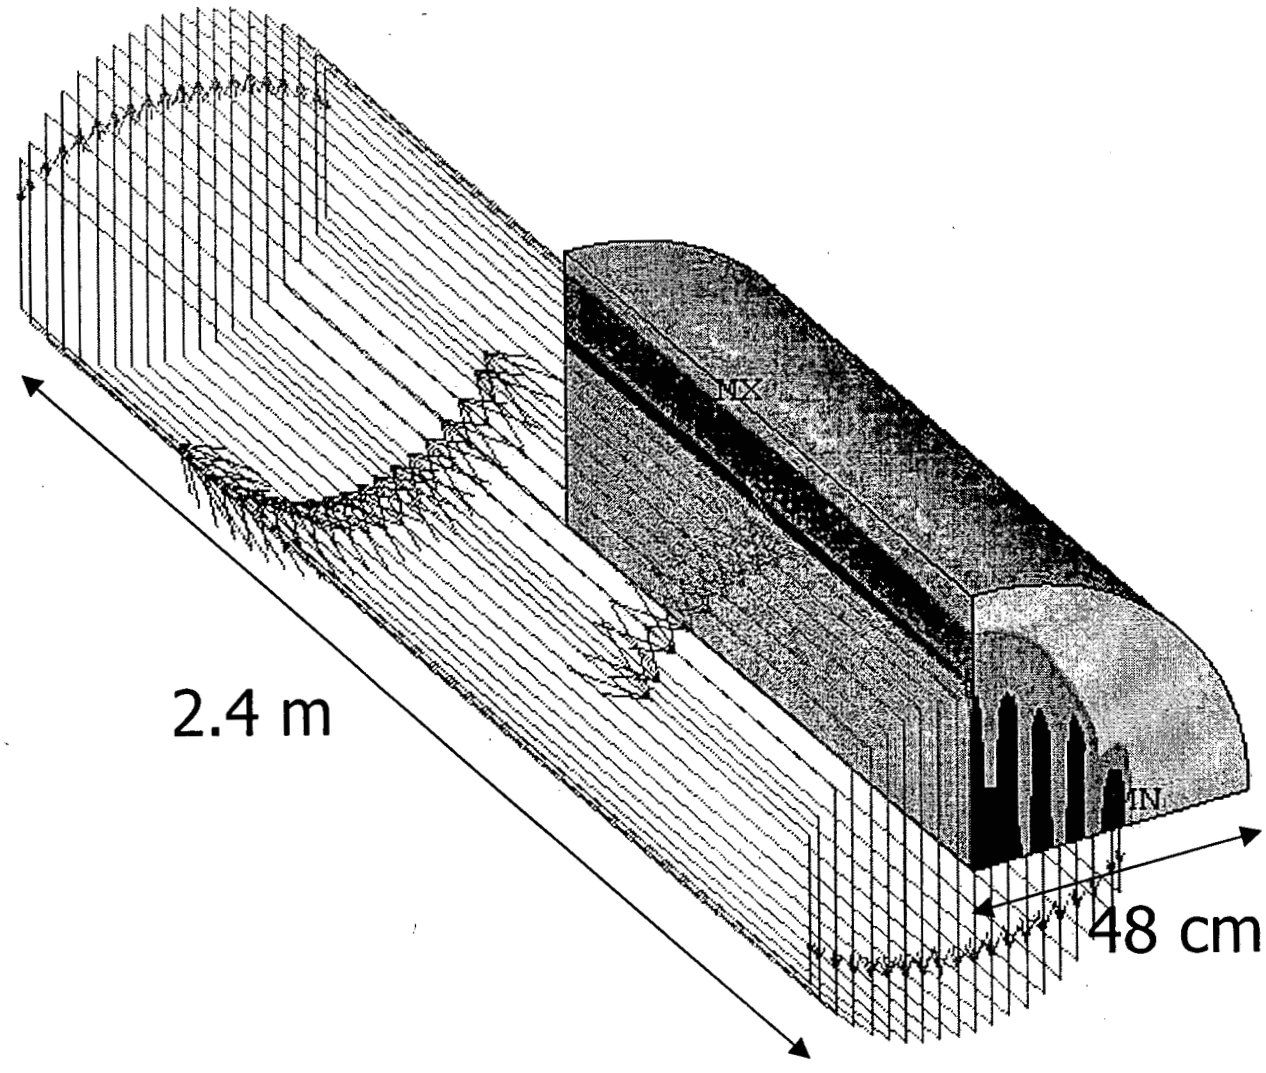

Source of UCN

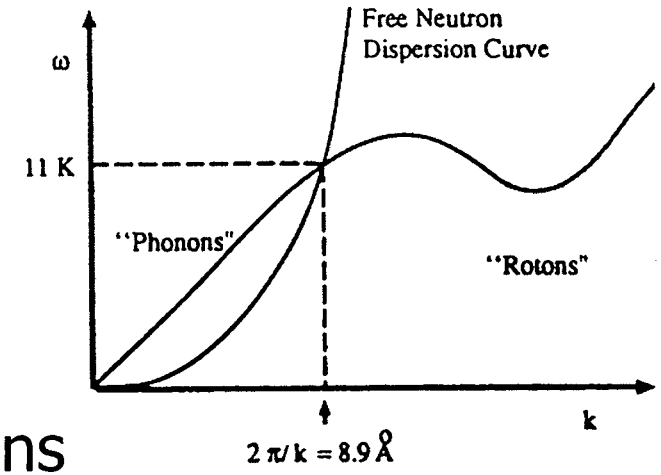

Down-scatter cold neutrons

(v = 400 m/s)

in superfluid ^{4}He to give:

UCN (v ≤ 5 m/s) **+** Phonons

Total UCN neutrons :

Production rate: 1.0 UCN / cm^3/sec

Density 5.0×10^5 UCN/ lt in 500 sec

Neutron Cells & Light Pipes

Cell Size

7.5 × 10 × 50 cm

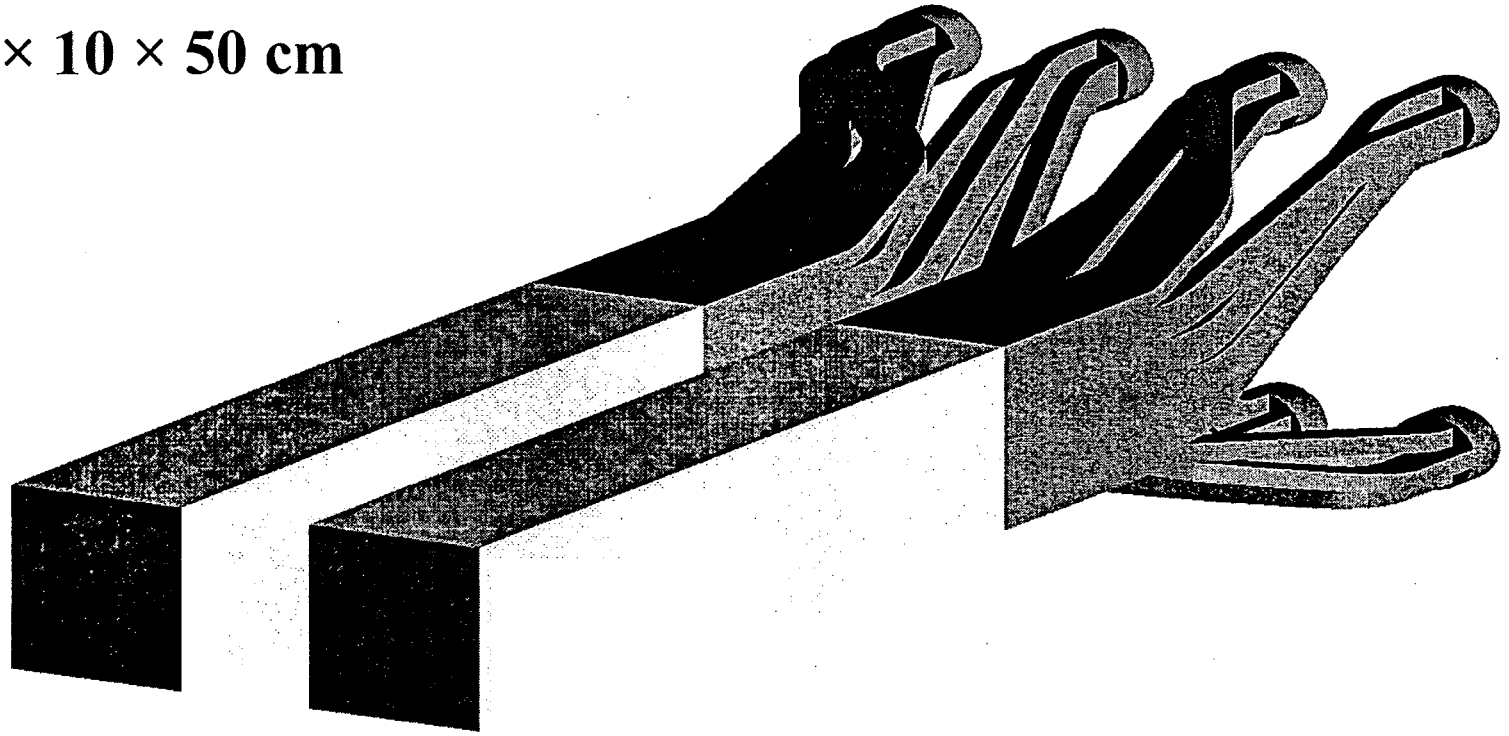

Polarized ^{3}He Source

Atomic beam of polarized ^{3}He

Current ~ 10^{+14} atoms / sec

EDM of atomic ^{3}He negligible, Schiff Shielding

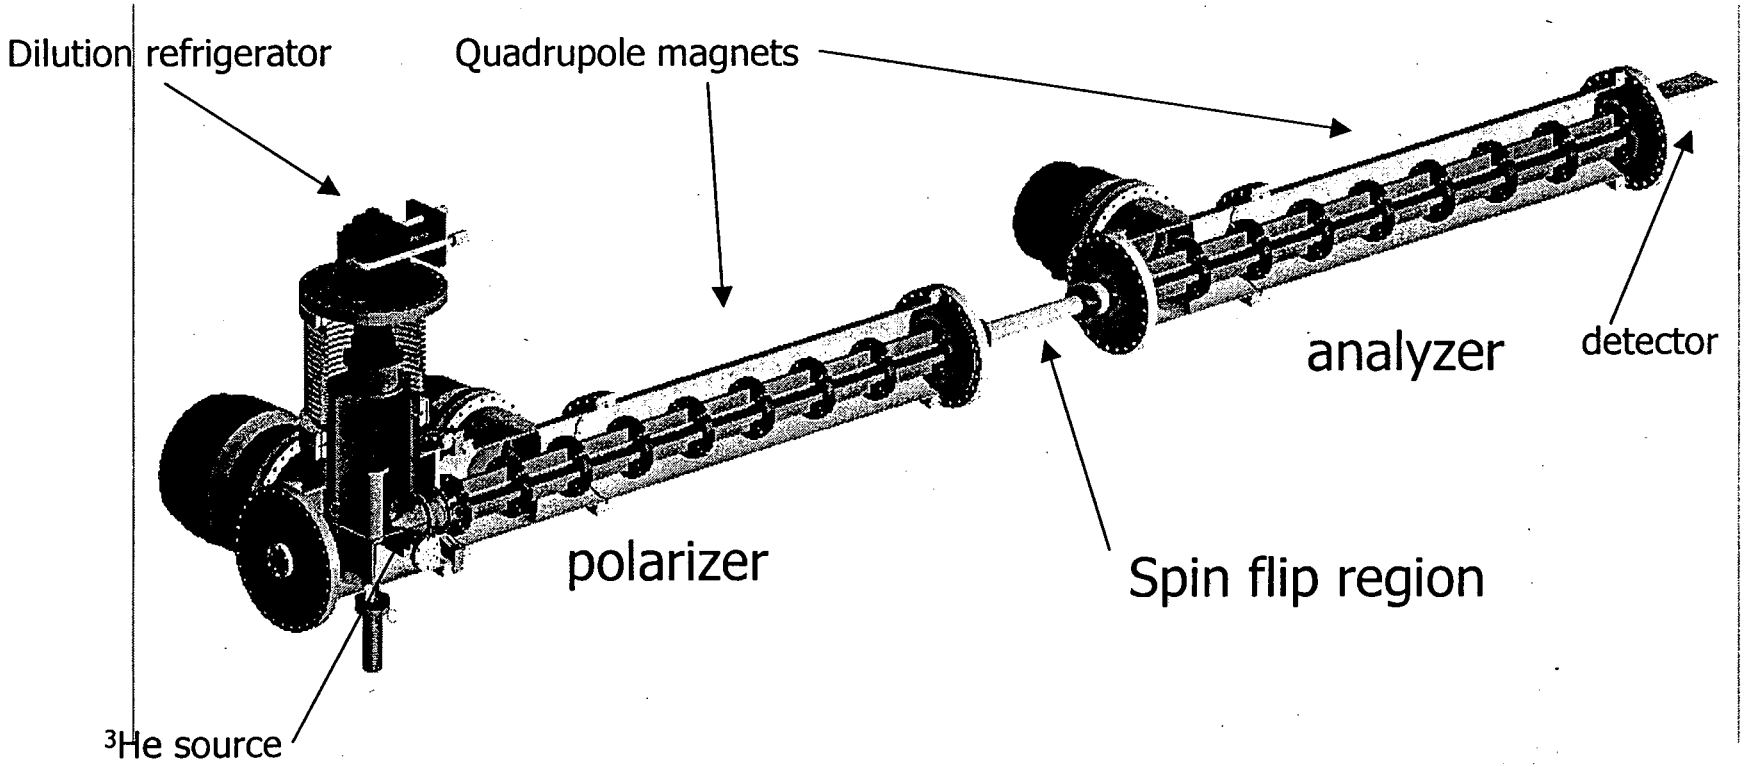

^{3}He-Dopant as an analyzer

$^3He + n \rightarrow t + p$ σ(parallel) ~ 0 b
σ(opposite) ~ 10^4 b

UCN loss rate~
$1-\mathbf{p_3}\bullet\mathbf{p_n}=1-p_3\, p_n \cos(\gamma_3-\gamma_n)B_0\, t$
$|\gamma_3-\gamma_n|=|\gamma_n|/10$

^{3}He concentration must be adjusted to keep the lifetime τ reasonable for a given value of the ^{3}He polarization.

The proper value for the fractional concentration of $^3He/^4He$ atoms ~ 10^{-10}

^{4}He as a detector

$^3He + n \rightarrow t + p$

t+p share 764 keV of kinetic energy.
They scintillate while stopping in the He.

The emitted light (~3 photons/keV) is in the XUV ~80 nm.

A wavelength shifter (TPB) is used to change the light to blue where it can be reflected and detected.

The cell walls and wavelength shifter must be made of materials that do not absorb neutrons or depolarize ^{3}He. Deuterated materials work for neutrons.
For the ^{3}He ??

SQUID and Scintillator Signals

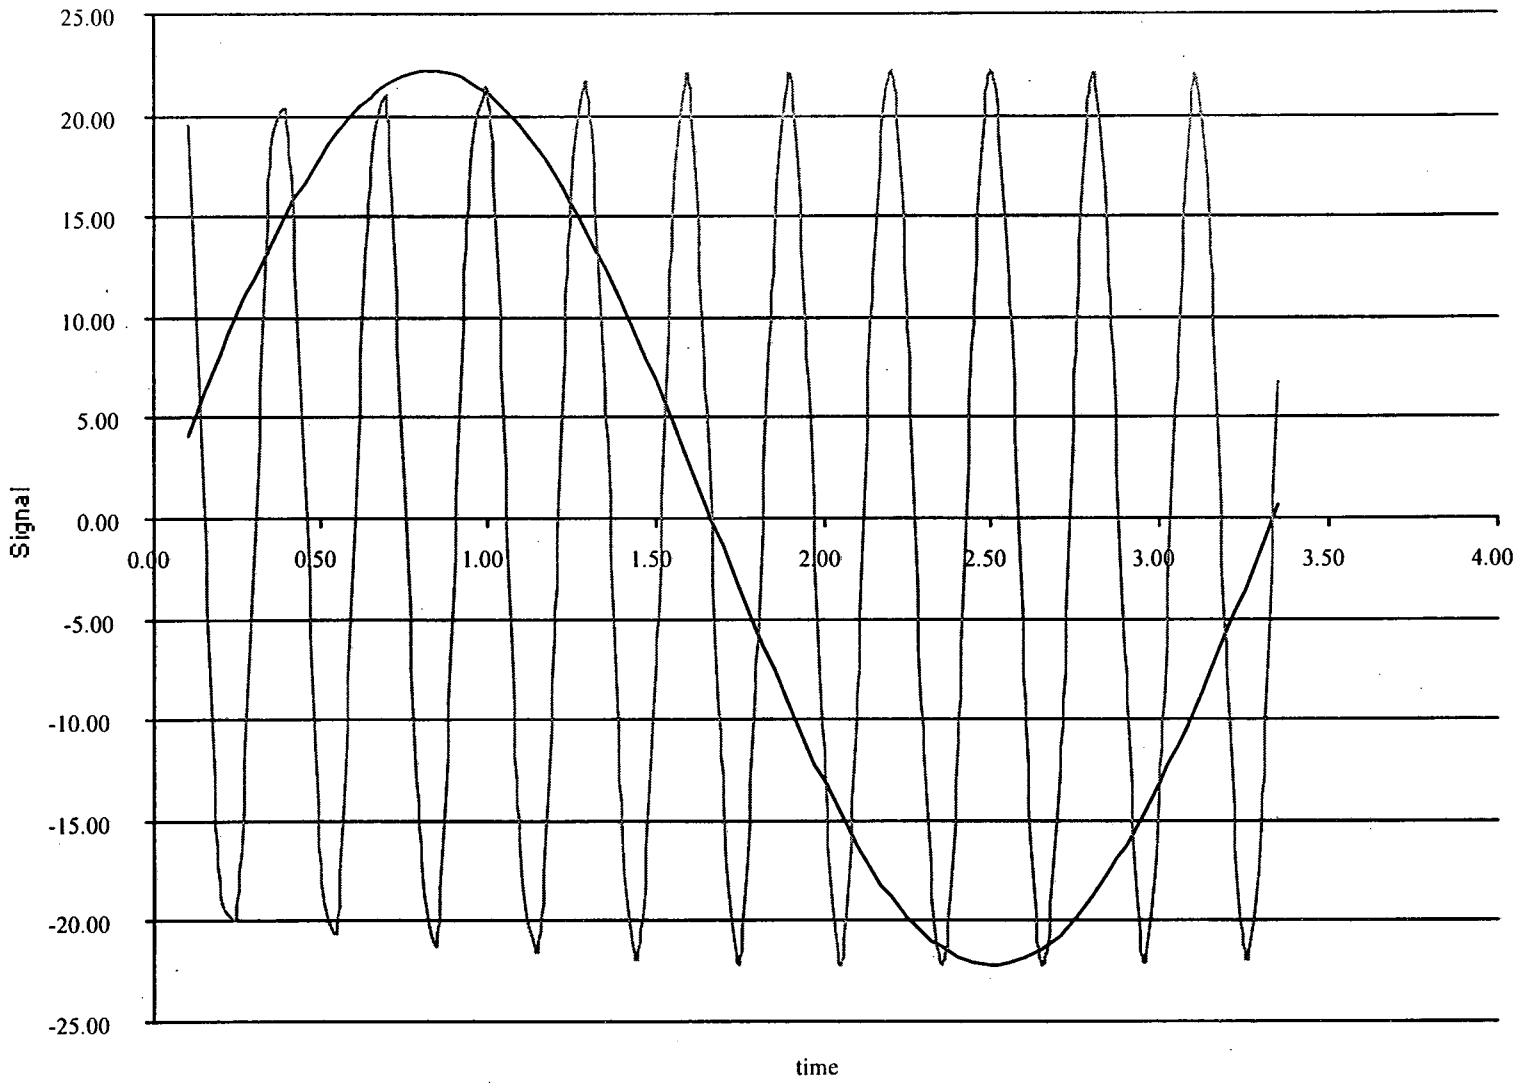

HV test setup - assembly

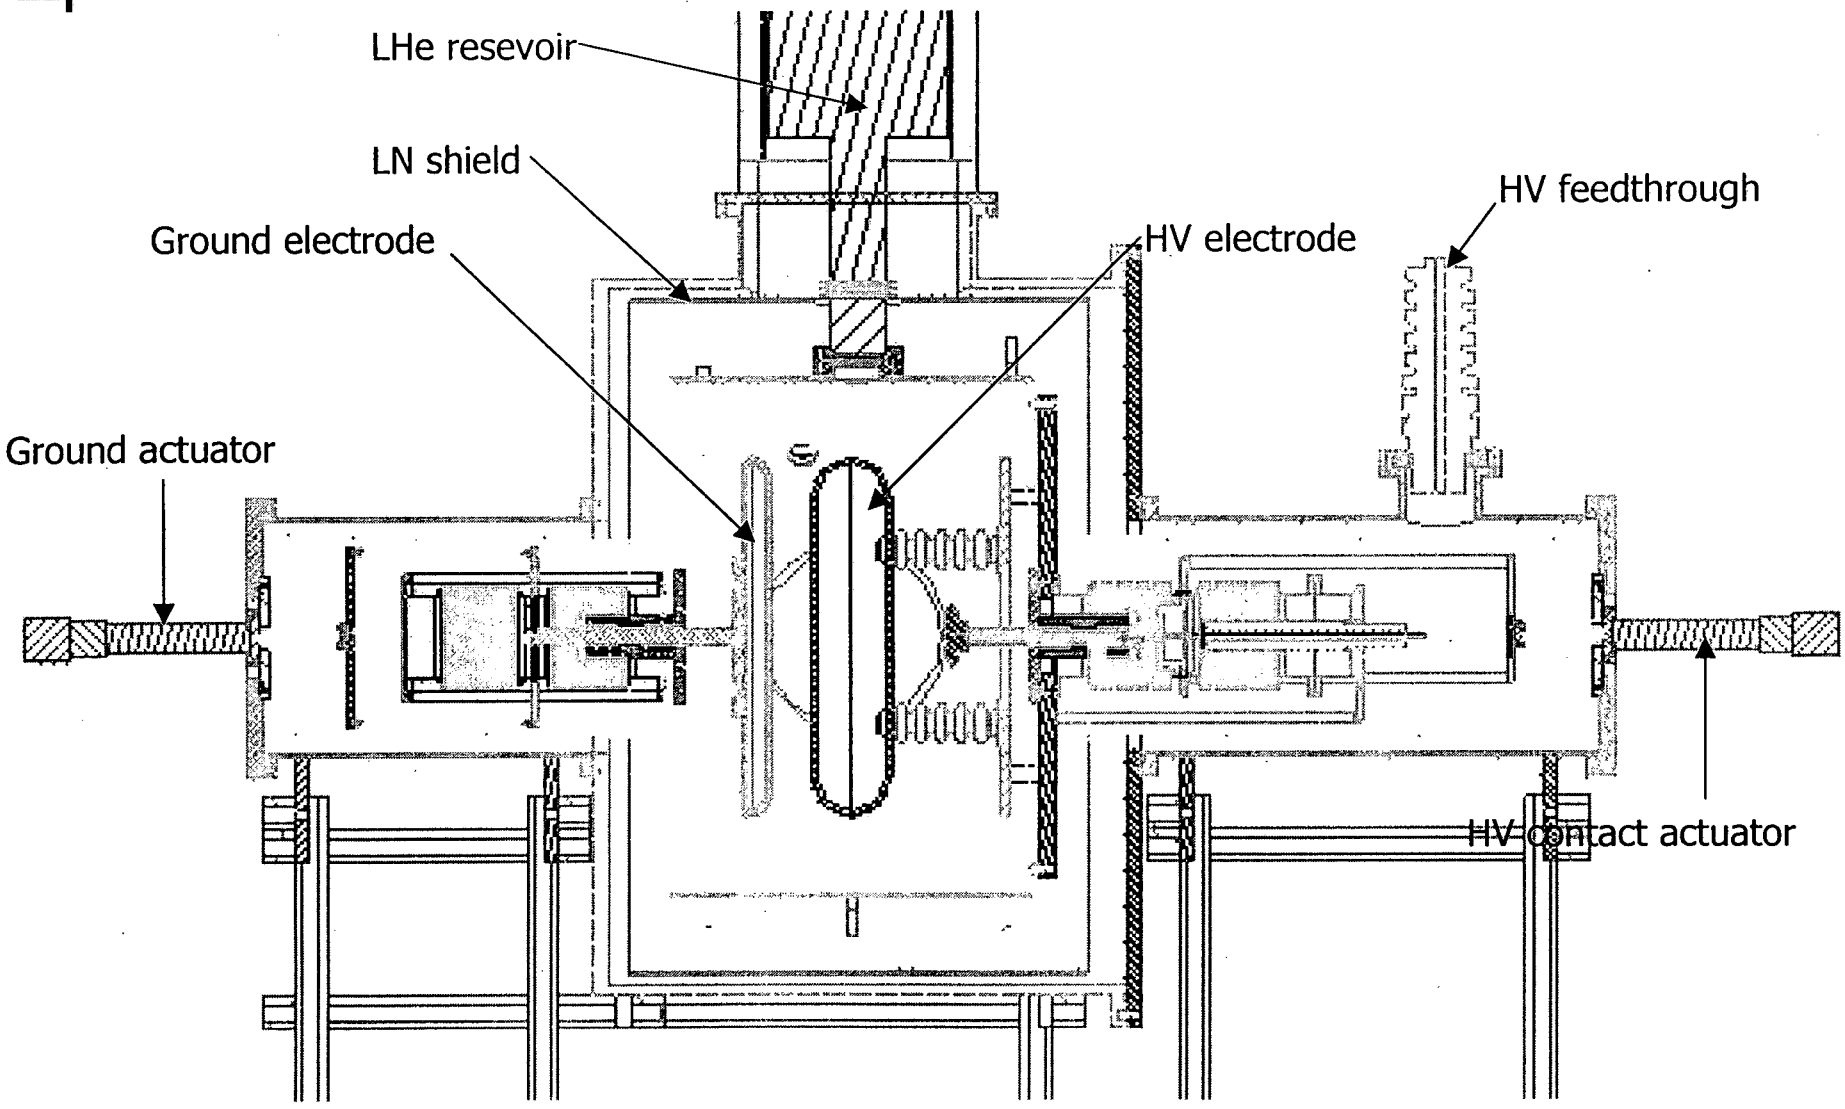

Issues for HV test program

Validate variable capacitor design

Measure cryogenic properties of materials

- testbed for engineering issues
- measure dielectric constant of cell materials

HV properties of LHe

- determine dielectric strength

Develop E field measurement with Kerr effect

Investigate effect of E field on scintillation process

...

Electric Field Measurement

Kerr Effect $\varepsilon = \pi K l E_0^2$

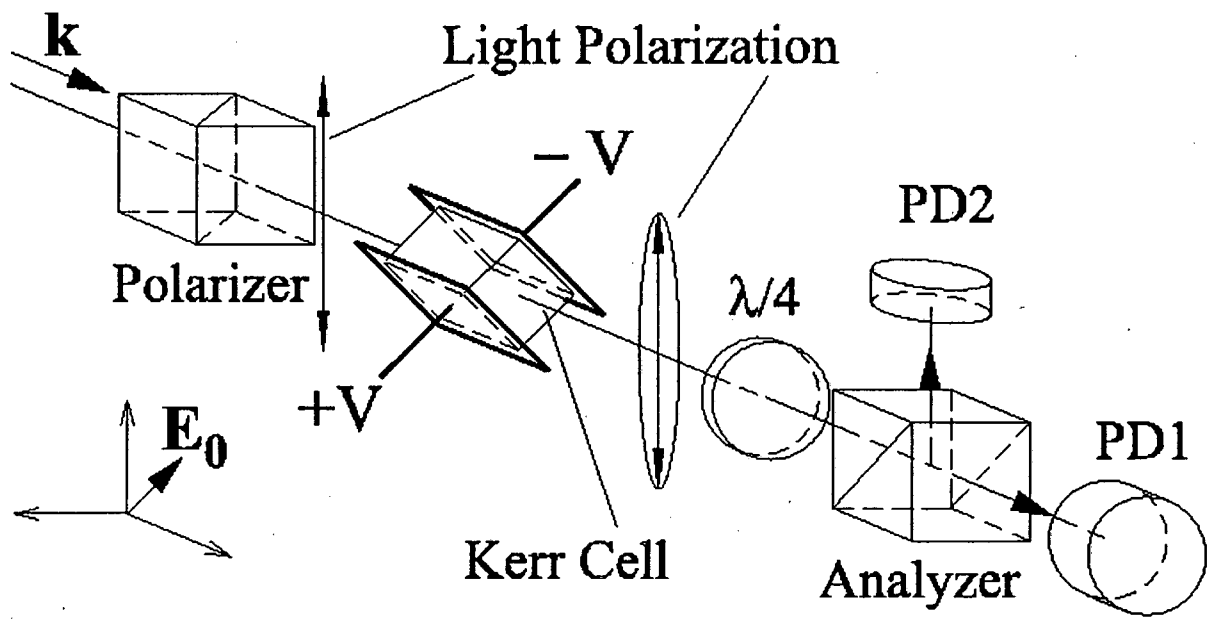

^{3}He Diffusion in ^{4}He Superfluid

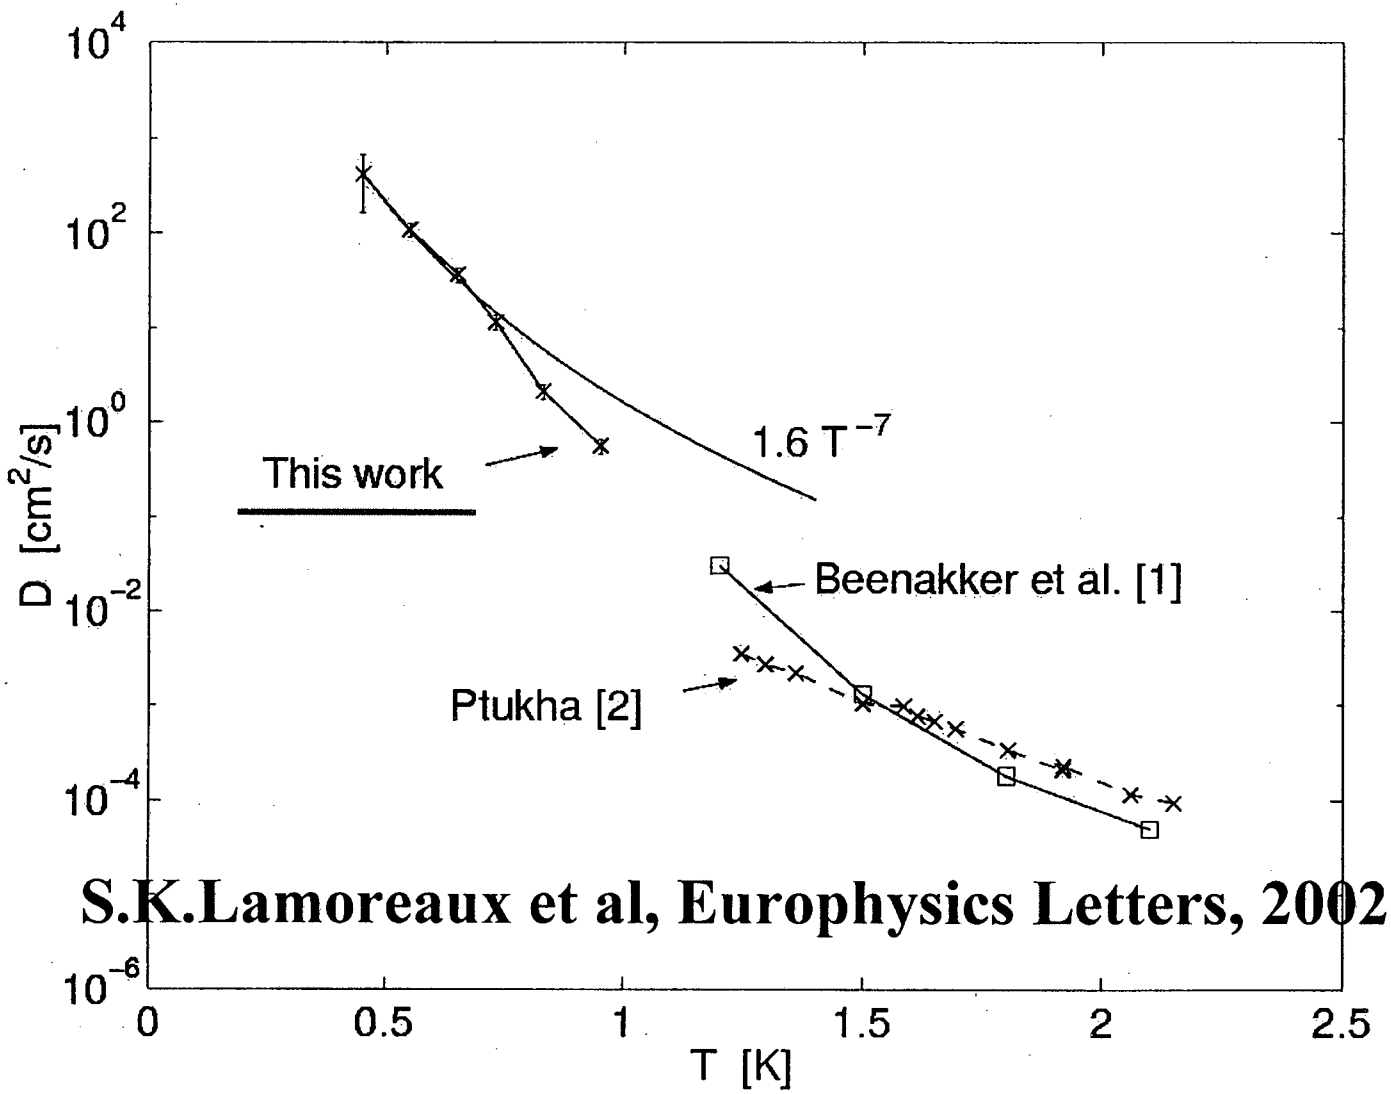

S.K.Lamoreaux et al, Europhysics Letters, 2002

SQUID tests

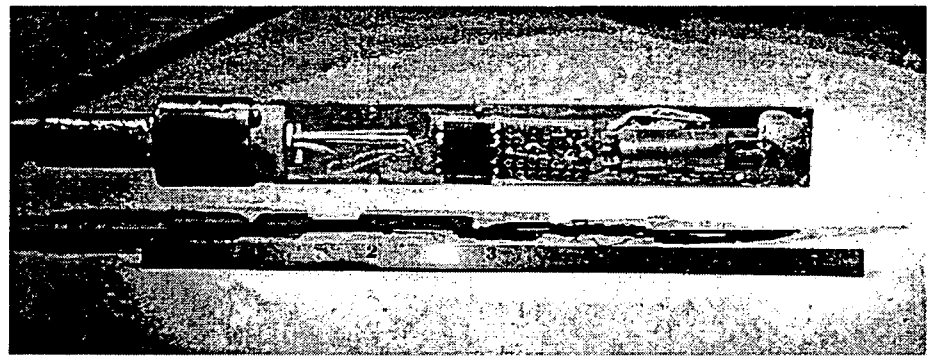

~100 cm^2 superconducting pickup coil

Flux = 2×10^{-16} Tm^2 = 0.1 Φ_0
Noise = 4 $\mu\Phi_0/Hz^{1/2}$ at 10 Hz
~ $T^{1/2}$ (shown experimentally)

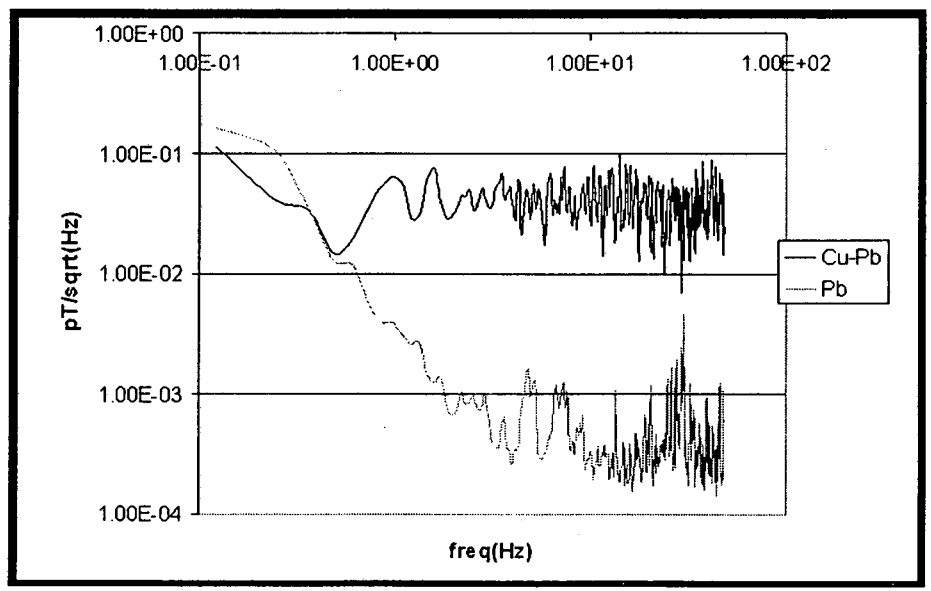

Statistical Errors

Figure of Merit for Statistics ~ $E_o \sqrt{(T N_o)}$

$$\sigma \approx h / [4\pi E_o \sqrt{(T N_o m)}]$$

		Goal
E_o	Static Electric Field Strength	x 5
T	Trap Lifetime	x 5
N_o	UCN trapped per sample	x 250
m	number of repeated samples	