

LA-UR-03- 3157

Approved for public release;
distribution is unlimited.

C.1

Title: CHALLENGE OF BENCHMARKING SIMULATION CODES
FOR THE LANL BEAM-HALO EXPERIMENT

Author(s): Thomas P. Wangler, LANSCE-1
Walter P. Lysenko1, LANSCE-1
Ji Qiang, LBNL
Robert W. Garnett, LANSCE-1

Submitted to: 2003 Particle Accelerator Conference (PAC2003)
Portland, Oregon
May 12-16, 2003



Los Alamos National Laboratory, an affirmative action/equal opportunity employer, is operated by the University of California for the U.S. Department of Energy under contract W-7405-ENG-36. By acceptance of this article, the publisher recognizes that the U.S. Government retains a nonexclusive, royalty-free license to publish or reproduce the published form of this contribution, or to allow others to do so, for U.S. Government purposes. Los Alamos National Laboratory requests that the publisher identify this article as work performed under the auspices of the U.S. Department of Energy. Los Alamos National Laboratory strongly supports academic freedom and a researcher's right to publish; as an institution, however, the Laboratory does not endorse the viewpoint of a publication or guarantee its technical correctness.

Form 836 (8/00)

CHALLENGE OF BENCHMARKING SIMULATION CODES FOR THE LANL BEAM-HALO EXPERIMENT *

W.P.Lysenko¹, J.Qiang², R.W.Garnett¹, and T. P. Wangler¹

¹Los Alamos National Laboratory

²Lawrence Berkeley National Laboratory

Abstract

We compare macroparticle simulations with beam-profile measurements from a proton beam-halo experiment in a study of beam-halo formation in mismatched beams in a 52-quadrupole periodic-focusing channel. The lack of detailed measurement of the initial distribution is an important issue for being able to make reliable predictions of the halo. We have found earlier that different initial distributions with the same Courant-Snyder parameters and emittances produce similar matched-beam profiles, but different mismatched-beam profiles in the transport system. Also, input distributions with greater population in the tails produce larger rates of emittance growth. We have concluded that using only the known Courant-Snyder parameters and emittances as input parameters is insufficient information for reliable simulations of beam halo formed in mismatched beams. The question is how to obtain the best estimate of the input beam distribution needed for more accurate simulations. In this paper, we investigate a new least squares fitting procedure, which is applied to the simulations used to determine the injected beam distribution, in an attempt to obtain a more accurate description of halo formation than from simulation alone.

1 INTRODUCTION

This paper is concerned with the comparison of self-consistent macroparticle simulations including space-charge forces using the macroparticle simulation code IMPACT[1], with experimental measurements of the beam profiles in a high-current proton beam. The measurements were made in a beam-transport channel using a 6.7-MeV proton beam at the Low Energy Demonstration Accelerator (LEDA) facility [2] at Los Alamos National Laboratory. A major goal of the experiment was to validate the beam-dynamics simulations of beam halo. Of particular importance was the validation of the space-charge routine in IMPACT [3]. Having failed to obtain good agreement comparing direct simulations with the measured profiles [4], we concluded that the beam profiles for mismatched beams are very sensitive to the initial distribution. We now investigate the use of a least squares fitting procedure applied to the RFQ simulation results to obtain an improved estimate of the initial beam distribution (at the exit of the RFQ). We suggest that this fitting procedure may provide an improved estimate of the real beam distribution at the

output of the RFQ, because it allows us to correct for unknown beamline errors upstream of the beam-transport line that may prevent us from deducing accurately the RFQ output distribution using simulations alone. Improving our prediction of the output RFQ distribution would provide a more accurate predictive capability for the beam halo evolution in a high energy proton linac.

2 BEAM HALO EXPERIMENT

The LEDA facility consists of a 75-keV DC injector, a low-energy beam transport (LEBT) system, and a 350-MHz radiofrequency quadrupole (RFQ), which accelerates the proton beam to 6.7 MeV. A schematic diagram of the LEDA beam-halo experiment transport system that follows the RFQ is shown in Fig. 1[5]. The transport system consists of 52 magnetic quadrupoles with alternating polarity (FODO Lattice) to provide strong periodic transverse focusing. Transverse beam profiles were measured using beam-profile detectors[6] located in the middle of the drift spaces after quadrupoles 4, 20, 22, 24, 26, 45, 47, 49 and 51. The first four quadrupole gradients were independently adjusted to match the beam, by producing equal rms sizes at the beam-profile detectors. The gradients were also adjusted to produce approximately pure mismatches in either a breathing or a quadrupole mode. The beam current was varied over a range from 16 to 100 mA. In this paper we report results at 75-mA.

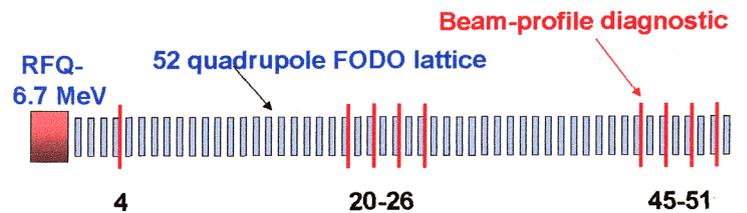


FIGURE 1. Block diagram of the 52-quadrupole-magnet lattice showing the nine locations of beam-profile scanners. The first four quadrupoles upstream of scanner 4 are adjusted to match or mismatch the beam.

3 OLD SIMULATION RESULTS

We obtained rms beam widths at each of the scanners

and rms emittances at scanners 20 and 45. The emittances as well as the Courant-Snyder parameters were deduced at scanners 20 and 45 using the rms values from the four associated profile monitors (20, 22, 24, and 26, for the value at 20, and 45, 47, 49, and 51 for the value at 51). The measured results for the mismatched beams were compared with the maximum amplitude predictions of a particle-core model [7], and maximum emittance growth predictions of a free energy model [8], assuming complete transfer of the free energy[9]. The experimental results strongly supported both analytic models. We have observed good agreement between simulations and profile measurements for the matched beam, but have been less successful in obtaining good agreement for the mismatched beams [4]. We believe that the main cause of the poor agreement for the mismatched cases lies in a lack of detailed knowledge of the initial distribution in phase space. Given that we were unable to measure the input distribution, our approach to the simulations was to generate four different initial distributions at the entrance of the beam-transport channel, all with the same Courant-Snyder ellipse parameters and emittances; these parameters were deduced from the measurements. The assumed input distributions were: 1) 6D Waterbag, 2) 6D Gaussian, and 3) Double Gaussian, and 4) a distribution called LEBT/RFQ, generated from a simulation through the LEBT and RFQ, starting at the plasma surface at the exit of the ion source. All four distributions were scaled to produce the correct initial Courant-Snyder parameters and emittances. These four distributions differ qualitatively with respect to their initial halo, i.e. initial population of the outer tails of the beam. Best agreement for the observed emittance growth was obtained with the Double Gaussian, which had the largest population in the tails. This is a result that would be expected from the particle-core model [7], since most of the halo particles have initial amplitudes that lie outside the core. However, none of these initial distributions yield good agreement with measured beam profiles for the mismatched case. We have concluded that knowledge of the initial particle distribution, especially the density in the tails, is important for accurate simulations of the beam halo.

The question that remains is how to obtain reliable simulations for mismatched beams when the input distribution is not measured. A possible solution is suggested by recent results obtained from the analysis of earlier quadrupole scan measurements used to characterize the beam at the exit of the RFQ [10]. In that case the authors concluded that unknown beamline parameter errors could lead to differences between the real and the simulation results at the output of the RFQ. The simplest assumption is that the main errors involve only the second moments, i.e. the Courant-Snyder parameters and the rms emittances. Therefore the authors modified the simulation results by adjusting the simulated RFQ output particle coordinates to change the second moments of the simulated RFQ output beam to give a best

least squares fit to all the measured profiles downstream of the RFQ. This procedure produced excellent agreement between measured and simulated profiles. We would like to investigate whether this same method would produce improved agreement for the beam halo experiment.

4 NEW RESULTS WITH LEAST-SQUARES FITTING

We believe it is most reasonable to assume that our RFQ simulation codes do contain the relevant physics. Discrepancies are most likely caused by the fact that we do not know the precise parameters for the as-built RFQ, particularly the axial voltage distribution. Therefore, the real beam distribution that is injected into the beam transport channel after the RFQ is not precisely known. For this reason we have investigated whether modifications to the beam generated by RFQ simulations would improve the agreement between the simulated and measured beam profiles. We have used a modified version of the fitting code described in ref. [10] in which an IMPACT simulation of the halo channel is controlled by a nonlinear optimizer. The input beam is described by the six transverse Courant-Snyder parameters (α , β , and ϵ in x and y). The optimizer varies the six parameters and attempts to minimize the differences between the simulated profiles at the wire-scanner positions and the measured profiles.

The input beams for these simulations are generated by starting with the particle distribution from our LEBT/RFQ simulation. This distribution is distorted by applying a certain linear transformation to the particle phase-space coordinates that results in the beam having the six Courant-Snyder parameters requested by the nonlinear optimizer; this procedure should retain much of the higher-order structure present in the original RFQ simulation. Figure 2 shows some of the results for the matched case. Rms deviations are about 2% (difference between experimental and simulated profiles).

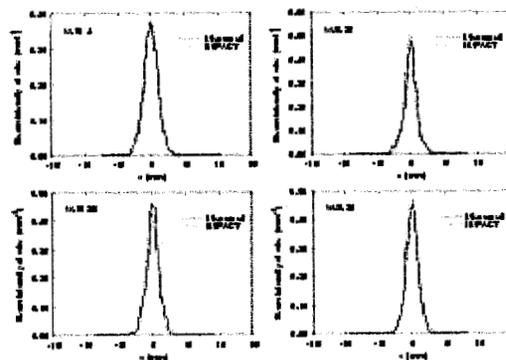


Figure 2: Comparison of measured profiles in the x direction with an IMPACT simulation at various wire scanners. The input beam for the simulation uses α_x , β_x , and ϵ_x values that best fit the experimental profiles.

We fitted only to the five wire scanner profiles between 4 to 26 (10 profiles), but the simulated and measured profiles agreed similarly well for the downstream scanners. Based on the agreement seen in Fig.2, the procedure looks promising. However, using this beam in the mismatched cases has not yet not produced as good agreement between the simulated and measured profiles.

5 CONCLUSIONS

We report on an investigation of a new least squares fitting procedure, which is applied to the simulations used to determine the injected beam distribution, in an attempt to obtain a more accurate description of halo formation than from simulation alone. The initial results for the matched beam look promising, but more work is required for the mismatched beams. We plan to investigate this situation further by fitting the mismatched case data (or fitting all the data, matched and mismatched simultaneously). The fitting code used an older version of IMPACT. We plan to do redo the fits using the latest version of IMPACT, which will enable us to study different boundary conditions in the space charge computations. This may lead to a better characterization of the RFQ exit beam, which will allow us to analyze better the halo experiment.

6 ACKNOWLEDGMENTS

We acknowledge the help of Dr. L. Young for providing an initial distribution from LEBT/RFQ simulation. We thank the LEDA personnel for making the experiment possible, and we acknowledge the work on the experiment by the rest of the beam-halo scientific team, C. K. Allen, K. C. D. Chan, P. L. Colestock, K. R. Crandall, J. D. Gilpatrick, J. D. Schneider, M. E. Schulze, R. L. Sheffield, and H. V. Smith. The was supported by U.S. Department of Energy.

REFERENCES

-
- [1] J. Qiang, R.D.Ryne, S. Habib, and V. Decyk, *J. Comput. Phys.* **163**, 434 (2000).
 - [2] H. Vernon Smith, J. D. Schneider, and R. Sheffield, *Proc. 2001 Part. Accel. Conf., IEEE Catalog No. 01CH37268*, 3296-3298.
 - [3] J. Qiang, R. D. Ryne, and R. W. Garnett, *Phys. Rev. ST Accel. Beams* **5**, (064201) 2002; J. Qiang, et.al., "A Systematic Comparison of Position and Time Dependent Macro-Particle Simulation in Beam Dynamics Studies," in preparation.
 - [4] J.Qiang, et al., *Phys. Rev. ST Accel. Beams*, **5**, (124201) (2002).

-
- [5] T.P.Wangler et al., *Proc. 2001 Part. Accel. Conf., IEEE Catalog No. 01CH37268*, 2923-2925; P.L.Colestock *et al.*, *Proc. 2001 Part. Accel. Conf., IEEE Catalog. No. 01CH37268*, 170-172; M. Schulze *et al*, *Proc. 2001 Part. Accel. Conf., IEEE Catalog No. 01CH37268*, 591-593.
 - [6] J.D.Gilpatrick *et al.*, *Proc. 2001 Part. Accel. Conf., IEEE Catalog No. 01CH37268*, 525-527.
 - [7] T.P.Wangler, K.R.Crandall, R. Ryne, and T.S.Wang, *Phys.Rev. ST Accel. Beams* **1**, (084201)1998.
 - [8] M. Reiser, *Theory and Design of Charged Particle Beams*, (Wiley, New York, 1994), pp. 470-473.; M. Reiser, *J.Appl. Phys.* **70**, 1919 (1991).
 - [9] C.K.Allen, et al., *Phys.Rev.Lett.* **89**, No.21, (214802) 2002.
 - 10 W.P.Lysenko et al., presented at the Int. Comp. Accel. Phys. Conf. 2002, Michigan State University, East Lansing MI, Oct. 15-18, 2002.