LA-UR- 10-01520

Approved for public release; distribution is unlimited.

Title: Calibration and optimization of proportional counter modules using Garfield ~~-- Poster presentation.~~

Author(s): K. Chung, J.A. Green K.N. Borozdin, M. Brockwell, G. Hogan, F.G. Mariam, M. F. Makela, and C.L. Morris.

Intended for: 2010 American Physical Society March Meeting
March 15-19, 2010
Portland, OR

Los Alamos
NATIONAL LABORATORY
EST. 1943

Los Alamos National Laboratory, an affirmative action/equal opportunity employer, is operated by the Los Alamos National Security, LLC for the National Nuclear Security Administration of the U.S. Department of Energy under contract DE-AC52-06NA25396. By acceptance of this article, the publisher recognizes that the U.S. Government retains a nonexclusive, royalty-free license to publish or reproduce the published form of this contribution, or to allow others to do so, for U.S. Government purposes. Los Alamos National Laboratory requests that the publisher identify this article as work performed under the auspices of the U.S. Department of Energy. Los Alamos National Laboratory strongly supports academic freedom and a researcher's right to publish; as an institution, however, the Laboratory does not endorse the viewpoint of a publication or guarantee its technical correctness.

Form 836 (7/06)

Calibration and Optimization of Proportional Counter Modules Using Garfield

K. Chung, J. A. Green, K. Borozdin, M. I. Brockwell*, G. E. Hogan, M. F. Makela, F. G. Mariam, and C. L. Morris

Subatomic Physics Group (P-25) *Applied Engineering Technology-4 (AET-4)

Los Alamos National Laboratory (LANL)

Abstract: Prototypes of radiation detector arrays used for charged-particle radiography require initial calibration to correlate the distribution of electron arrival time to the particle track locations. This step is crucial to obtaining the spatial resolution necessary to separate particle tracks traversing the individual proportional counters in the arrays. Our past attempts to use cosmic rays alone for the initial calibration have fallen short of obtaining the desired resolution due to the insufficient cosmic ray flux to provide the necessary number of particle tracks. A theoretical relation between electron drift time and radial drift distance is obtained with Garfield, a CERN gas detector simulation program. This relation is then used as an effective starting point for the initial calibration and results in a shorter calibration period and improved spatial resolution of the detectors.

What Is Garfield?

- Platform-independent general e-/ion dynamics calculation
- Detector-specific e-field, transport (Magboltz) and ionization (Heed) calculation
- Optimization of operating conditions
  - Gas mixtures
  - E-field
  - Drift time
  - Elementary signal processing
  - Magnetic field



Electrons drifting in a proportional tube experience 5-6 orders of magnitude in e-field strength.



Green line consists of electron clusters formed along the track of a 3 GeV muon. Blue lines are some of electrons drifting toward anode in the center.



Based on electron drift time obtained from Garfield, electron arrival time distribution is calculated.

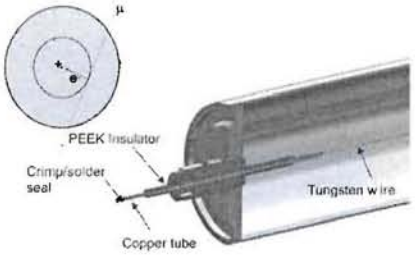

Aluminum tube with welded end caps. Care is exercised to create airtight enclosure with robust wire support that minimizes field-distortion.



Time arrival distribution of electrons. Because of near-light speed of muon, electrons created at the closest to anode wire arrive first.



The most probable energy for a particle to lose when traveling 1 cm. The plots exhibit Bethe-bloch behavior



Energetic particles create clusters of various numbers of electrons along their tracks.

Calibrated drift-time conversion with cosmic-ray



R(t) table is derived from SumPos/TDC Counts and baseline was subtracted.

Radiographic concept



- Track individual muons/electrons using drift-tube detectors
- Track muons into and out of an object volume.
- Determine:
  - scattering angle of each muon
  - muon missing on bottom layer? → shadow!
  - Energy difference between top & bottom layers? → measure areal density.



Energy lost by 3 GeV muons per cluster where at least 1 electron was created.



Energy loss per cm by 3GeV muons



Number of clusters per cm. It shows poisson's distribution.

Calibrated drift-time measurement



Tracking concept

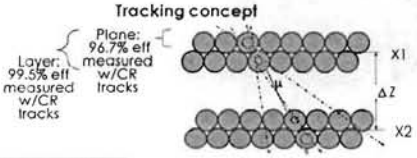

Since each tube gives R only, multiple planes are required to resolve ambiguities.

1. Filter the hits prior to tracking using the segment filter.
2. Initial guess of t_0 (t_{median} – 500ns). *Same t_0 applies for all hits in the event.*
3. Compute drift distance, $R(t_r-t_0)$, for each hit drift tube.
4. Find the best-fit track & compute χ^2.
5. Vary t_0 toward a lower track χ^2

Recent application of proportional counter arrays in radiography at P-25, LANL

Mostly protons incoming (charged, strongly interacting heavy particles, ~99%)

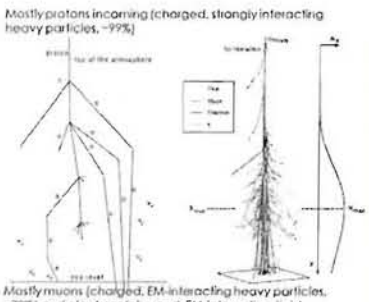

Mostly muons (charged, EM-interacting heavy particles, ~70%) and electrons (charged, EM-interacting, light particles, ~30%). Neutrinos are weakly interacting and can be ignored.

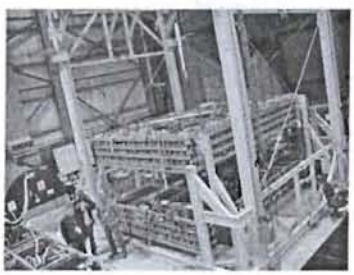

Giant Muon Tracker

Mini-Muon Tracker

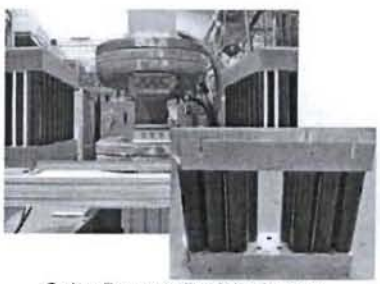

Carbon fiber proportional counter array used in pion-production experiment

Los Alamos NATIONAL LABORATORY EST. 1943

Physics

Calibration and Optimization of Proportional Counter Modules Using Garfield

K. Chung, J. A. Green, K. Borozdin, M. I. Brockwell*, G. E. Hogan, M. F. Makela, F. G. Mariam, and C. L. Morris

Subatomic Physics Group (P-25) *Applied Engineering Technology-4 (AET-4)

Los Alamos National Laboratory (LANL)

Abstract: Prototypes of radiation detector arrays used for charged-particle radiography require initial calibration to correlate the distribution of electron arrival time to the particle track locations. This step is crucial to obtaining the spatial resolution necessary to separate particle tracks traversing the individual proportional counters in the arrays. Our past attempts to use cosmic rays alone for the initial calibration have fallen short of obtaining the desired resolution due to the insufficient cosmic ray flux to provide the necessary number of particle tracks. A theoretical relation between electron drift time and radial drift distance is obtained with Garfield, a CERN gas detector simulation program. This relation is then used as an effective starting point for the initial calibration and results in a shorter calibration period and improved spatial resolution of the detectors.

What is Garfield?

- Platform-independent general e-/ion dynamics calculation
- Detector-specific e-field, transport (Magboltz) and ionization (Heed) calculation
- Optimization of operating conditions
  - Gas mixtures
  - E-field
  - Drift time
  - Elementary signal processing
  - Magnetic field



Electrons drifting in a propor-tional tube experience 5-6 orders of magnitude in e-field strength.



Green line consists of electron clusters formed along the track of a 3 GeV muon. Blue lines are some of electrons drifting toward anode in the center.



Based on electron drift time obtained from Garfield, electron arrival time distribution is calculated.

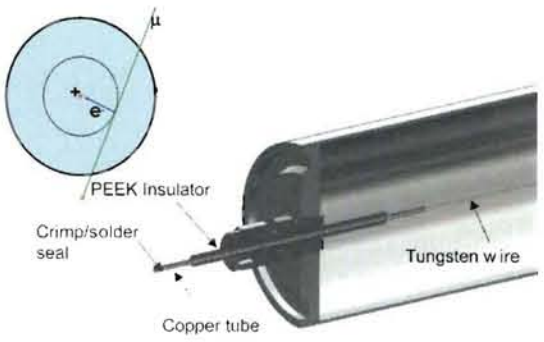

Aluminum tube with welded end caps. Care is exercised to create airtight enclosure with robust wire support that minimizes field-distortion .



Time arrival distribution of electrons. Because of near-light speed of muon, electrons created at the closest to anode wire arrive first.



The most probable energy for a particle to lose when traveling 1 cm. The plots exhibit Bethe-bloch behavior



Energetic particles create clusters of various numbers of electrons along their tracks.

Calibrated drift-time conversion with cosmic-ray

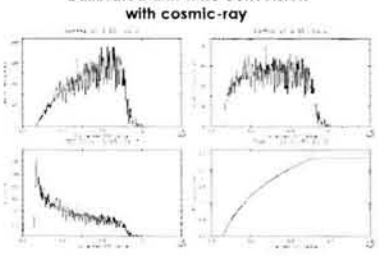

R(t) table is derived from SumPos/TDC Counts and baseline was subtracted.

Radiographic concept



- Track individual muons/electrons using drift-tube detectors
- Track muons into and out of an object volume.
- Determine:
  - scattering angle of each muon
  - muon missing on bottom layer? → shadow!
  - Energy difference between top & bottom layers? → measure areal density.



Energy lost by 3 GeV muons per cluster where at least 1 electron was created.



Energy loss per cm by 3GeV muons



Number of clusters per cm. It shows poisson's distribution.

Calibrated drift-time measurement

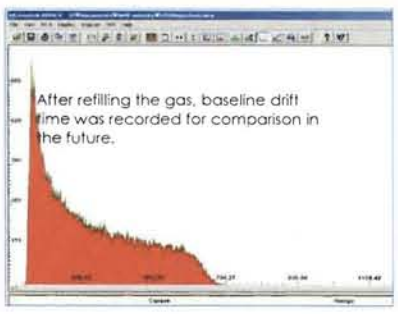

Tracking concept

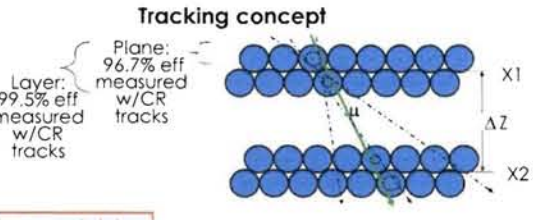

Since each tube gives R *only*, multiple planes are required to resolve ambiguities.

1. Filter the hits prior to tracking using the segment filter.
2. Initial guess of t_0 (t_{median} – 500ns) . *Same t_0 applies for all hits in the event.*
3. Compute drift distance, $R(t_i-t_0)$, for each hit drift tube.
4. Find the best-fit track & compute χ^2
5. Vary t_0 toward a lower track χ^2

Mostly protons incoming (charged, strongly interacting heavy particles, ~99%)

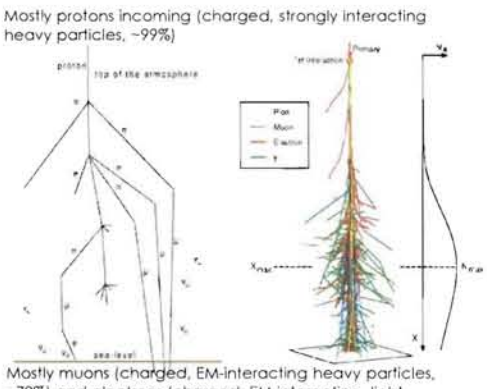

Mostly muons (charged, EM-interacting heavy particles, ~70%) and electrons (charged, EM-interacting, light particles, ~30%).Neutrinos are weakly interacting and can be ignored.

Recent application of proportional counter arrays in radiography at P-25, LANL

Giant Muon Tracker

Mini-Muon Tracker

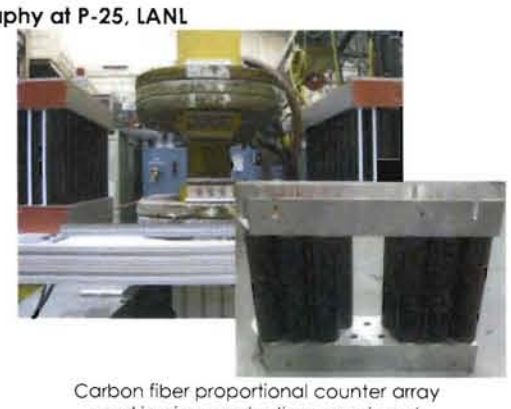

Carbon fiber proportional counter array used in pion-production experiment

Los Alamos NATIONAL LABORATORY EST. 1943

Physics