A major purpose of the Technical Information Center is to provide the broadest dissemination possible of information contained in DOE's Research and Development Reports to business, industry, the academic community, and federal, state and local governments.

Although a small portion of this report is not reproducible, it is being made available to expedite the availability of information on the research discussed herein.

1

LA-UR-89-935

APR 0 6 1989

Los Alamos National Laboratory is operated by the University of California for the United States Department of Energy under contract W-7405-ENG-36

TITLE: **PHOTOELECTRIC INJECTOR DESIGN CODE**

LA-UR--89-935

DE89 009282

AUTHOR(S): B. E. Carlsten

SUBMITTED TO: 1989 Particle Accelerator Conference
Chicago, IL
March 20-23, 1989

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

MASTER

y acceptance of this article, the publisher recognizes that the U.S. Government retains a nonexclusive, royalty-free license to publish or reproduce the ublished form of this contribution, or to allow others to do so, for U.S. Government purposes.

he Los Alamos National Laboratory requests that the publisher identify this article as work performed under the auspices of the U.S. Department of Energy

Los Alamos

Los Alamos National Laboratory
Los Alamos, New Mexico 87545

IM NO. 836 R4
NO 2629 5/81

Photoelectric Injector Design Code*

Bruce E. Carlsten
MS-H825, Los Alamos National Laboratory, Los Alamos, NM 87545

Abstract

We will describe a computer code based on an analysis for an emittance growth mechanism for electron beams in photoelectric injectors. The analysis leads to a generic injector design with a single external solenoid used for both focusing the beam and reducing the correlated emittance. The position of the solenoid is given by a complicated integral expression, depending on the accelerating gradient and rf focusing. The computer code described here integrates this expression and calculates the best solenoid lens position for a given phasing and field amplitudes of the accelerating cavities.

Introduction

In earlier papers,[1,2] we have described a technique of focusing a charged particle beam with a lens to allow exact compensation of the nonlinear space charge forces before the lens with the nonlinear space-charge forces after the lens. This appears as a growth in the beam's normalized rms emittance followed by a subsequent reduction, resulting in no overall emittance growth. This technique is only valid in the case of small radial distortions of the beam, with no longitudinal mixing of particles, thus requiring a sufficiently small longitudinal energy spread. This technique is responsible for the drastic improvement in emittance that is possible in linacs driven by photoelectric injectors[1] instead of conventional thermionic cathodes. A photoelectric injector consists of a laser driven photocathode in the first rf cavity in a linac section. This design provides extremely quick acceleration to multiple MeVs, so very little energy spread is introduced by the longitudinal space charge forces, and the beam is transversely stiff enough not to appreciably deform. Because photocathodes are capable of producing hundreds of amperes to kiloamperes, longitudinal bunching is not necessary. However, the comparatively low peak currents possible from thermionic cathodes require longitudinal bunching. The resulting mixing of the particles removes the correlation of emittance with longitudinal position. This effective thermalization of the beam eliminates the ability to compensate for the nonlinear space charge forces. The dominant emittance growth mechanism for both types of injectors under usual operating conditions is due to nonlinear space charge forces.[1,3] Because the technique described above can reduce the emittance for photoelectric injectors and not for thermionic injectors, photoelectric injectors can provide emittances an order of magnitude smaller for similar peak currents and total charges.

In previous papers, we have discussed this technique for a simple space charge model requiring self-similar beam expansion. The effects of rf acceleration and focusing were included. In this paper, we will study the consequences of using a realistic space charge model. With the earlier model, the compensation of the nonlinear space charge forces was possible just by varying the lens strength, but with the additional complexity of the new model, more parameters will be needed. However, we will show that enough extra parameters will be available if we allow tailoring of the accelerating gradient profile of the linac cavities. As before, we will show that we can also select the lens position to provide a beam focus at the emittance minimum. Equations will be presented that have been incorporated into a simple FORTRAN program, allowing for a quick iteration of the gradient profile and lens position to obtain a rough design. This would then serve as a starting point for a more detailed simulation using PIS, PARMELA, or other accelerator design codes.

Description of the Physical Model

Before we develop the analytic model, we will describe [illegible] model which is similar to our earlier one.

* [illegible] supported by the U. Department of Energy, Office of Basic Energy [illegible] Los Alamos National Laboratory [illegible] Research [illegible] of the U. Department of Energy.

A uniform slug beam of some initial aspect ratio A is originated at some longitudinal location $-z_1$, with some initial relativistic gamma γ_1 and beta β_1. We use an internal cylindrical coordinate system ρ, ζ that travels and expands with the beam so that the outer edge of the slug is defined by $\rho = 1$ or $\zeta = \pm 1$ (Fig. 1). This slug beam is accelerated by some external rf gradient, obeying

$$\frac{d\gamma}{dz} = \frac{eE_z(z)}{mc^2} \qquad (1)$$

The slug is focused by a lens at $z = 0$ and propagates to some distance z beyond it. The accelerating gradient $E_z(z)$ is variable to the degree that the field can be graded between successive cavities, and we assume we can vary it this amount to suit our needs.

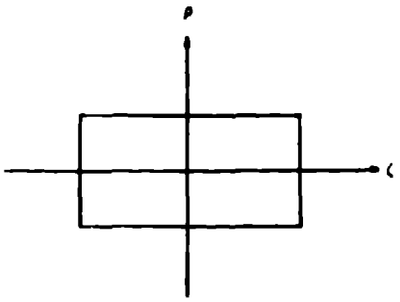

Fig. 1. Slug beam internal coordinate system.

We next assume that the lens is linear and infinitely thin. We have shown before[1] how to include the effect from a thick lens, and it does not effect the following development. However, in the design of a practical photoinjector, as thin a magnetic lens as possible should be used, because including a bucking coil to ensure no axial magnetic field on the cathode will push the axial magnetic center of the lens further from the cathode.

We also require that there be no radial distortion of the beam, in particular, the slug beam cannot radially bow out at its axial center. How well this assumption is met [illegible] degree the emittance growth can be eliminated. Because [illegible] be working in the beam's frame of reference, we [illegible] this frame that the beam density be uniform and [illegible] no appreciable relative longitudinal motion.

Finally, we will, for clarity, provide our [illegible] emittance. We will use the usual definition for [illegible] emittance given by

[illegible]

[illegible]

[illegible]

[illegible]

be transported and focused. The technique to reduce the rms emittance works solely because it happens while the forces are still nonlinear.

Analytic Model

Although the beam is in general accelerating, it is possible to construct an instantaneous inertial frame of reference comoving with the beam. If the acceleration is sufficiently small compared to the beam length so retardation effects do not create relative beam motion and variations in density, then the transverse particle motion obeys

$$\frac{d^2 r}{dt_b^2} = \Lambda_b(r, \zeta) \quad ,$$

where t_b is the proper time in the instantaneous beam frame of reference and Λ_b is the force times the electronic charge over its mass in that frame. The laboratory frame is connected to the beam frame by

$$\gamma_b \beta_b c dt_b = dz \quad ,$$

and the transverse equation of motion becomes

$$\gamma_b c \frac{d}{dz}(\gamma_b \beta_b \frac{dr}{dz}) = \Lambda_b = \frac{E_{rb} e}{m} = \Lambda_l \quad , \qquad (3)$$

where the l subscript refers to the laboratory frame. We have used the relations

$$\Lambda_b = E_{rb}\frac{e}{m} \qquad \text{and} \qquad \Lambda_l = \frac{1}{\gamma^2} E_{rl}\frac{e}{m} \quad ,$$

and because there is no magnetic field in the beam frame

$$E_{rl} = \gamma E_{rb}$$

Recalling, we start at $z = -z_1$ and integrating Eq. (3) once yields

$$\gamma_b \beta_b \frac{dr}{dz} = \int_{-z_1}^{z} \frac{\Lambda_l}{\gamma_b} dz' + \gamma_1' \beta_1' r_1' \quad , \qquad (4)$$

where γ_1' and β_1' are the initial particles' gamma and beta at $z = -z_1$. Integrating again gives

$$r = r_1 + r_1' \gamma_1' \beta_1' \int_{-z_1}^{z} \frac{dz}{\gamma_b} + \int_{-z_1}^{z} \frac{dz'}{\gamma_b} \int_{-z_1}^{z'} \frac{\Lambda_l}{\gamma_b} dz \quad , \qquad (5)$$

Here the [illegible] γ_b and Λ_l are functions of the dummy integration variable [illegible] that they are associated with under [illegible] the [illegible] and [illegible] are the beam edge initial conditions [illegible] at $z = -z_1$. Now we have

$$r_1 = r_1 + r_1' \gamma_1' \beta_1' \int_{-z_1}^{z_1} \frac{dz}{\gamma_b} + \int_{-z_1}^{z_1} \frac{dz'}{\gamma_b} \int_{-z_1}^{z'} \frac{\Lambda_l}{\gamma_b} dz \quad ,$$

and

$$r_1 = r_1' \gamma_1' \beta_1' \int_{-z_1}^{z_1} \frac{dz}{\gamma_b} + \int_{-z_1}^{z_1} \frac{dz'}{\gamma_b} \int_{-z_1}^{z'} \frac{\Lambda_l}{\gamma_b} dz \quad ,$$

[illegible] $z = z_1$. Because the beam [illegible] at the [illegible] condition is

$$r_1 = r_1 + r_1' \gamma_1' \beta_1' \int_{-z_1}^{z_1} \frac{dz}{\gamma_b} + \int_{-z_1}^{z_1} \frac{dz'}{\gamma_b} \int_{-z_1}^{z'} \frac{\Lambda_l}{\gamma_b} dz \quad ,$$

[illegible] r_1 [illegible] r_1'. Below we [illegible] each [illegible] at a given location [illegible] downstream from the lens

$$r = r_1 + r_1' \gamma_1' \beta_1' \int_{-z_1}^{z} \frac{dz}{\gamma_b} + \int_{-z_1}^{z} \frac{dz'}{\gamma_b} \int_{-z_1}^{z'} \frac{\Lambda_l}{\gamma_b} dz \quad ,$$

$$r = r_1 + r_1' \gamma_1' \beta_1' \int_{-z_1}^{z} \frac{dz}{\gamma_b} + \int_{-z_1}^{z} \frac{dz'}{\gamma_b} \int_{-z_1}^{z'} \frac{\Lambda_l}{\gamma_b} dz \quad ,$$

$$r = r_1 + r_1' \gamma_1' \beta_1' \int_{-z_1}^{z} \frac{dz}{\gamma_b} + \int_{-z_1}^{z} \frac{dz'}{\gamma_b} \int_{-z_1}^{z'} \frac{\Lambda_l}{\gamma_b} dz \quad ,$$

$$r = r_1 + r_1' \gamma_1' \beta_1' \int_{-z_1}^{z} \frac{dz}{\gamma_b} + \int_{-z_1}^{z} \frac{dz'}{\gamma_b} \int_{-z_1}^{z'} \frac{\Lambda_l}{\gamma_b} dz \quad ,$$

$$r = r_1 + r_1' \gamma_1' \beta_1' \int_{-z_1}^{z} \frac{dz}{\gamma_b} + \int_{-z_1}^{z} \frac{dz'}{\gamma_b} \int_{-z_1}^{z'} \frac{\Lambda_l}{\gamma_b} dz \quad ,$$

where now γ_1' and β_1' are the particles' gamma and beta at the lens position $z = 0$.

Although the term $r_1' \gamma_1' \beta_1'$ may appear to be poorly defined for electrons coming from a photocathode in an rf cavity with rf focusing (caused by using a curved back wall containing the cathode), a computer simulation can be used to calculate this term with only small error from

$$r_1' \gamma_1 \beta_1 = -\frac{r_1}{\int_{-z_1}^{z_{cross}} \frac{dz}{\gamma_b}} \quad ,$$

where z_{cross} is the location a zero charge beam would cross the axis.

Space-Charge Model

We have shown earlier that if the functional dependency of Λ_l can be factored into

$$\Lambda_l = k(\rho, \zeta) \Lambda_l(z) \quad ,$$

and α_l can be found so the ratio r/r' at z is independent of ζ [illegible], thus, the ratio is the same for all particles in the ensemble. From Eq. (1), we know then that the rms emittance = zero. However the form in Eq. (8) for the space charge force is not very realistic. In this part we will try to get a better model, and in the next part we will examine its consequences.

In Fig. 2, we see plots for E_{rb} versus the internal radial coordinate ρ for different aspect ratios $A_r = \tau_b c / r_{edge}$ at the beam's axial center and edges, where r_{edge} is the radial edge of the beam and τ_b is the beam's temporal duration. We assume as before that the charge density is uniform. The units are arbitrary, but consistent between the different aspect ratios.

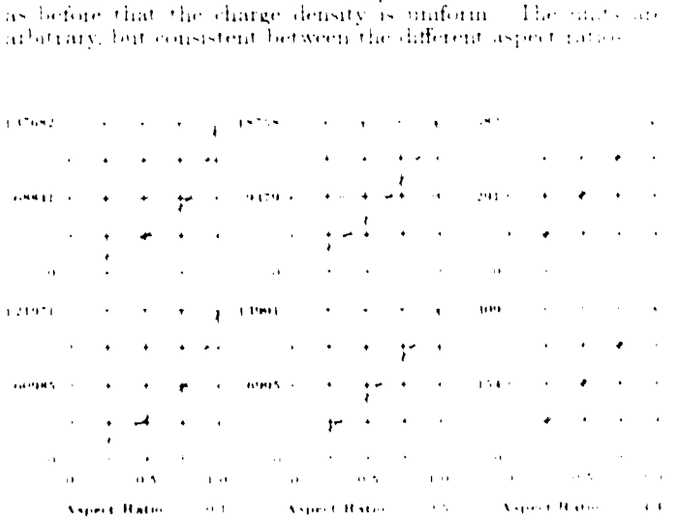

Fig. 2 Radial [illegible] versus [illegible] for the [illegible] edge [illegible] beam [illegible] the single beam [illegible] some different aspect [illegible]

Many functional forms can be chosen to [illegible] the [illegible] forces. There are two [illegible] effects [illegible] inhomogeneous. But for small enough aspect ratio [illegible] difference [illegible] between the [illegible] radial dependence. [illegible] aspect ratios the nonlinear radial dependence [illegible] variation in the radial electric field [illegible] being larger in the axial center and less [illegible]. We will use a form of the space charge force [illegible] found from fitting the curves [illegible] Eq. [illegible] that [illegible] effects.

[illegible]

The factors ρ^2 and γ^2 can be replaced by any other more realistic terms, with no changes in the following results, except that the constants in the exponent terms must be modified.

Integral Equations

Equation (9) has doubled the complexity of the space charge model from Eq. (8). The general technique to obtain a solution so that

$$\frac{r_i}{r_i'} = \frac{r_j}{r_j'}$$

for all particles i and j is to explicitly write out

$$0 = r_i r_j' - r_j r_i'$$

and see which terms do not vanish identically. Using Eq. (8) leads only to requiring that the coefficient of the term

$$[k_{\rho i} \rho_i \rho_j' - k_{\rho j} \rho_j \rho_i']$$

be zero, which could be satisfied with the proper choice for α_i. Now, with Eq. (9) for the space charge force, the coefficients of the three terms

$$\rho_i^2 \rho_j^2 \quad \rho_i^2 \gamma_j^2 \quad \gamma_i^2 \rho_j^2 \quad \text{and} \quad \gamma_i^2 \gamma_j^2$$

must be zero. Let's define certain integrands to simplify the expressions for the coefficients:

$$I_1 = \gamma_i$$

$$I_2 = \gamma_i (2.25 e^{-\gamma_i / 0.85})$$

$$I_3 = \frac{\gamma_i}{2} (1 - e^{-\gamma_i / 0.36})$$

Then, with

$$A = \gamma_0 + \gamma_1 \gamma_2 \gamma_3 \int_{-z_1}^{0} \frac{dz'}{\gamma \beta} + \int_{-z_1}^{z} \frac{dz}{\gamma \beta} \int_{-z_1}^{z} \frac{I_1}{\gamma^2 \beta_0} dz$$

$$+ \gamma_1 \gamma_2 \gamma_3 \int_{-z_1}^{z} \frac{dz'}{\gamma \beta} \tag{10a}$$

$$B = \int_{-z_1}^{z} \frac{dz}{\gamma_0 \beta} \int_{-z_1}^{z} \frac{I_2}{\gamma^2 \beta_0} dz \tag{10b}$$

$$C = \int_{-z_1}^{z} \frac{dz}{\gamma_0 \beta} \int_{-z_1}^{z} \frac{I_3}{\gamma^2 \beta_0} dz \tag{10c}$$

$$D = \gamma_0 + \gamma_1 \gamma_2 \gamma_3 \int_{-z_1}^{0} \frac{dz'}{\gamma \beta} + \gamma_1$$

$$+ \gamma_1 \gamma_2 \int_{-z_1}^{z} \frac{dz}{\gamma_0 \beta} \int_{-z_1}^{z} \frac{I_1}{\gamma^2 \beta_0} dz + \int_{-z_1}^{z} \frac{dz'}{\gamma \beta} \tag{10d}$$

$$E = \gamma_1 \int_{-z_1}^{z} \frac{dz}{\gamma_0 \beta} \int_{-z_1}^{z} \frac{I_2}{\gamma^2 \beta_0} dz + \int_{-z_1}^{z} \frac{dz'}{\gamma \beta} \tag{10e}$$

$$F = \gamma_1 \int_{-z_1}^{z} \frac{dz}{\gamma_0 \beta} \int_{-z_1}^{z} \frac{I_3}{\gamma^2 \beta_0} dz + \int_{-z_1}^{z} \frac{dz'}{\gamma \beta} \tag{10f}$$

$$G = \gamma_2 + \gamma_1 \gamma_2 \int_{-z_1}^{z} \frac{I_1}{\gamma^2 \beta_0} dz \tag{10g}$$

$$H = \int_{-z_1}^{z} \frac{dz}{\gamma_0 \beta} \tag{10h}$$

$$I = \int_{-z_1}^{z} \frac{I_1}{\gamma^2 \beta_0} dz \tag{10i}$$

$$J = \int_{-z_1}^{z} \left(\gamma_1 \gamma_2 \gamma_3 \int_{-z_1}^{z} \frac{dz'}{\gamma \beta} + \int_{-z_1}^{z} \frac{dz}{\gamma_0 \beta} \int_{-z_1}^{z} \frac{I_1}{\gamma^2 \beta_0} \right)$$

$$K = \frac{\gamma_1 \beta_0}{\gamma \beta} \int_{-z_1}^{0} \frac{dz'}{\gamma \beta} \int_{-z_1}^{z} \frac{I_2}{\gamma^2 \beta_0} dz \quad \text{and} \tag{10j}$$

$$L = \frac{\gamma_1 \beta_0}{\gamma \beta} \int_{-z_1}^{0} \frac{dz'}{\gamma \beta} \int_{-z_1}^{z} \frac{I_3}{\gamma^2 \beta_0} dz \tag{10k}$$

the three equations that must be satisfied become

$$(BI - CH) - \alpha_1 (EI + BL - CK - FH) = 0 \tag{11a}$$

$$(BG - AH) - \alpha_1 (EG + BJ - AK - DH) = 0 \tag{11b}$$

and $$(CG - AI) - \alpha_1 (FG + CJ - AL - DI) = 0 \tag{11c}$$

These equations are nonlinear, but can be satisfied with a sufficient number of variables. In particular, if the accelerating gradient can be tailored, integrals of the form

$$\int \frac{dz}{\gamma \beta} \quad \text{and} \quad \int \frac{I_n}{\gamma^2 \beta_0} dz$$

for $n = 1, 2, 3$ can be varied sufficiently to provide enough additional flexibility along with tuning α_1 to find a solution. An alternative technique would be to include two more lenses at different locations. Although this would lead to a quartic equation for the values of the lenses' focal strengths, fortunately, all terms quadratic and higher drop out, leaving a simple linear system to solve. Of course in general, the integrals depend on the lenses' strength because they modify the beam's aspect ratio through focusing, but, typically, the coupling is sufficiently weak so this is not a problem.

Iteration Procedure

We have written a short FORTRAN code (CEPIC — Coupled Integration of Coupled Equations for Photoelectric Injectors Code) to integrate Eqs. (6) and (11). Iterating over possible accelerating gradients and minimizing the error in these equations provides for a design that has removed as much of the correlated emittance as possible, but still with a nicely focused beam at the downstream end of the linac.

Conclusion

We have presented coupled integral equations that, if solved, lead to a design for a photoelectric injector that has removed correlated emittance. The analysis includes a more sophisticated space charge model and shows that the ability to tailor the accelerating gradient is sufficient to minimize the error in these equations to a level that provides only slight emittance growth. Emittance growth from rf effects have not been included here; they have been discussed before, and it is assumed that the injector design has minimized them. The effects of the rf lenses at the entrances and exits of the rf cells has also not been included but could be with some additional algebra and would not change the form of the solution.

Acknowledgments

I wish to acknowledge helpful discussions with R. [illegible] and [illegible]

References

R. L. Carnsten, "New Photoelectric Injector Design," Los Alamos National Laboratory AGX-FEL-A-[illegible]; Proceedings of the Electron Laser Conf. of Jerusalem, Israel, August 1988.

R. L. Carnsten and R. L. Sheffield, "Photoelectric Injector Considerations," Proceedings 1988 Linear Accel. Conf., Williamsburg, [illegible] October 1988, to be published.

[illegible] Fraser, R. L. Sheffield, J. E. Gray, and G. W. [illegible], "Bright Photoelectron Injectors," IEEE Trans. Plasma Sci. 12, 5, 290, 1985.

[illegible] "Space Charge Effects," [illegible] Phys. Rev. A 275, [illegible].

M. [illegible] and R. L. Carnsten, "Space Charge [illegible]," [illegible] Proceedings of the IEEE Particle Accelerator Conf., [illegible].