

LA-UR-11-5459
September 2011
EP2011-0299

Stormwater Performance Monitoring in the Los Alamos/Pueblo Watershed During 2010, Revision 1

Prepared by the Environmental Programs Directorate

Los Alamos National Laboratory, operated by Los Alamos National Security, LLC, for the U.S. Department of Energy under Contract No. DE-AC52-06NA25396, has prepared this document pursuant to the Compliance Order on Consent, signed March 1, 2005. The Compliance Order on Consent contains requirements for the investigation and cleanup, including corrective action, of contamination at Los Alamos National Laboratory. The U.S. government has rights to use, reproduce, and distribute this document. The public may copy and use this document without charge, provided that this notice and any statement of authorship are reproduced on all copies.

Stormwater Performance Monitoring in the Los Alamos/Pueblo Watershed During 2010, Revision 1

September 2011

Responsible project manager:

Steve Veenis		Project Manager	Environmental Programs	9-28-11
Printed Name	Signature	Title	Organization	Date

Responsible LANS representative:

Michael J. Graham		Associate Director	Environmental Programs	9/28/11
Printed Name	Signature	Title	Organization	Date

Responsible DOE representative:

George J. Rael		Manager	DOE-LASO	9-29-2011
Printed Name	Signature	Title	Organization	Date

EXECUTIVE SUMMARY

This first annual monitoring report provides a summary of analytical monitoring, discharge measurements, and precipitation associated with stormwater collected from the Los Alamos and Pueblo (LA/P) Watershed from May 2010 through October 2010. Monitoring objectives are to collect data for evaluating the effect of watershed mitigations installed in the LA/P Watershed. Watershed mitigations being evaluated include DP Canyon grade-control structure and associated wetlands; Pueblo Canyon cross-vane structures, wing ditch, willow planting, wetlands, and grade-control structure; Los Alamos Canyon low-head weir; and the stormwater retention basins and associated willow planting below the Solid Waste Management Unit (SWMU) 01-001(f) drainage in Los Alamos Canyon. These mitigations have been implemented with the overall goal of working in concert with each other to minimize the potentially erosive nature of stormwater runoff, to enhance deposition of sediment, and to reduce or eliminate access of contaminated sediments to flood erosion.

Gage and sampling locations are situated within the LA/P Watershed to monitor the hydrology and sediment transport along the length of the watershed, including stations that bound the mitigations. However, the topography, geology, geomorphology, and meteorology of the watershed are quite complex; thus monitoring runoff and precipitation are also complex and challenging. Stage height, which is then converted to discharge using rating curves developed for each individual gage, is monitored at 5-minute intervals at a series of gages using shaft-encoder float sensors, self-contained bubbler pressure sensors, and ultrasonic probe sensors. Precipitation data are collected across the Los Alamos National Laboratory by means of five meteorological towers and an extended rain gage network. Sampling for analyte suites specific to each gage is conducted using ISCO 3700 portable automated samplers configured to initiate sampling routines when a preset stage height is recorded at the data logger or with a liquid level actuator. Sampling equipment and the extended rain gage network are shut down in the winter months (December through March) and reactivated in the spring. In addition, three grab samples were collected at the outlets of two constructed retention basins and wetlands below the SWMU 01-001(f) drainage on July 26, 2010. Grab samples were not collected when ponds were actively accepting and discharging stormwater. Instead, samples collected represent residual, low-flow conditions prevalent during the long duration between storms.

Throughout the LA/P Watershed, frequency of discharge and suspended sediment concentrations are positively correlated with the cumulative impermeable area draining to each gage, indicating that the larger the impermeable area, the more frequently it flows and the greater the sediment concentrations. For all of the canyons and all measured storm events (with the exception of August 15 and September 22), the flood bore moves from upstream to downstream with increasing or decreasing peak discharges. Because of the extremely localized precipitation, travel times and peak discharge increases/decreases vary substantially, and there is little to no relationship between peak discharge magnitudes, travel times between stations, or peak discharge increases/decreases. In the upper watershed of Acid Canyon (E055.5 to E056), the peak discharge increases in 18 of 26 events (74% average increase). In Pueblo Canyon (E055 to E059), the upper watersheds have as many large increases (four of eight events, 77% average increase) in peak discharge as large decreases (four of eight events, 100% average decrease). Downstream the large decreases far outweigh the increases until the final stretch of the watershed, gage stations E060.1 to E109.9, where peak discharge increases in seven of eight events (100% average increase), indicating that this channel section tends to gain rather than lose volume. Also, between E055, E056, and E059 to E060.1, which have flow paths that traverse the Pueblo Canyon Watershed mitigations, the peak discharge decreases for 40 of 41 events, with the only increase (E055 to E060.1, 69% average increase) occurring during the very large August 16 storm when the grade-control structure failed.

In DP Canyon, the upper channel (E038 to E039.1) traverses the DP Canyon Watershed mitigations, and the peak discharge decreases in 26 of 33 events (72% average decrease); from E039.1 to E040, the peak discharge decreases for all of the 31 events (72% average decrease). In addition, the DP Canyon mitigations reduced runoff volume by 0.3 acre-feet on July 9 and 0.4 acre-feet on July 30, the two storm events when sampling was conducted upstream and downstream of the mitigations. In Los Alamos Canyon, the peak discharge increases in the upper watershed (E026 to E030) for all 10 events (76% average increase), most likely due to additional runoff from the drainage area associated with E030 and the difference in percent impermeable area draining to the two stations (30% at E030 compared with 2% at E026). From E030 to E042.1, the peak discharge increases in 12 of 13 events (65% average increase); however, from E040 to E042.1, the peak discharge decreases in 15 of 18 events (70% average decrease). Also, the peak discharges are generally much higher at E040 than at E030 and are assumed to be due to the larger percent of total, or nested, impermeable area draining to E040 (50%) compared with E030 (7%). The LA Canyon low-head weir is located between E042.1 and E050.1, through which the peak discharge decreases for all 10 storm events (77% average decrease). For six storm events, the flow is reduced completely (100% average decrease). In the final stretch of the LA Canyon Watershed, E050.1 to E109.9, the peak discharge increases for 2 storm events (79% average increase) and decreases for four storm events (84% average decrease). Overall, the Pueblo Canyon mitigations, DP Canyon mitigations, and LA Canyon low-head weir potentially reduced peak discharges, thus potentially reducing the erosive force of the stream.

At gage stations E042.1, E060.1, and E109.9, positive linear correlations exist between discharge and suspended sediment concentrations at different time lags for each measured storm event (sediment lagging behind discharge). However, a stronger, more precise linear relationship exists between sediment yield and runoff volume across the LA/P Watershed. Comparing precipitation with discharge, the discharge lags the precipitation, and when there are several rainfall pulses, there are consequential peaks in the hydrograph. Suspended sediment is much less predictable with no definitive trend between concentration magnitude, peak discharge, or time to peak. Regarding the watershed mitigations, two storm events (July 9 and 30) were sampled up (E038) and downstream (E039.1) of the DP Canyon Watershed mitigations. Between these two stations for these two storms, the average relative percent difference is 34% decreasing (three of the four samples) and 29% increasing (one of the four samples). Overall, suspended sediment concentrations were potentially reduced by the DP Canyon and Pueblo Canyon mitigations (no samples were collected downstream of the LA Canyon low-head weir).

Filtered and unfiltered results were obtained from all inorganic chemical analyses and radionuclide analyses at E109.9; filtered/unfiltered pairs were obtained once for each nuclide and 33 times for each inorganic chemical. For the target analyte list metals, less than one-half of unfiltered results are detected for mercury, selenium, and thallium; silver, cadmium, and chromium are largely reduced to below detection limits in the filtered results. There was a five-fold reduction in detected, filtered analytical results for aluminum, barium, beryllium, copper, iron, manganese, nickel, lead, uranium, vanadium, and zinc. There was a two- to five-fold reduction in detected, filtered analytical results for arsenic, calcium, cobalt, magnesium, and potassium. Analytical results for samples collected at the retention basins and wetland below the SWMU 01-001(f) drainage represent residual, low-flow conditions prevalent during the long duration between storms and show total polychlorinated biphenyls (PCBs) collected at the terminus of the wetland are almost 30 times less concentrated than total PCBs collected in the upper retention basin, suspended sediment is reduced 2 times in the same samples, and lead is reduced almost 5 times. Analyte concentrations, including suspended sediment, generally show a poor correlation to instantaneous discharge. However, suspended sediment concentrations can be used as a predictor of many inorganic chemicals and radionuclides in unfiltered samples due to the strong linear relationship between the two. In contrast, plutonium-239/240 and total PCBs are not linearly correlated to suspended

sediment concentrations across the LA/P Watershed or at a single gage station. Continued monitoring is necessary to demonstrate attenuation of plutonium-239/240 and total PCB concentrations in stormwater.

The mitigations implemented in the Los Alamos and Pueblo Canyons Watershed are relatively new features that, in some cases, are expected to take at least one runoff season to begin to show representative performance. Some prospectively positive effects of the mitigations, including potential reductions of peak discharge, sediment deposition, and contaminant transport, were observed during this monitoring year and will be reevaluated during sampling that will occur during 2011. However, the nature and location of storms in 2010 did not result in a comprehensive contaminant data set for assessment of the effects of the mitigations on contaminant concentrations within a storm or between storms to determine a sense of long-term performance expectations for the mitigations. Ongoing monitoring in 2011 is expected to enhance the data set and will advance the conceptual model for these relationships and further enable performance assessment of the mitigations.

CONTENTS

1.0	INTRODUCTION	1
1.1	Project Goals	1
2.0	FLOW, PRECIPITATION, AND SAMPLING IN THE LA/P WATERSHED.....	2
2.1	Sampling at the Retention Basins in the Former LA-SMA-2 Drainage	4
2.2	Sampling at the Gage Stations in the LA/P Watershed.....	4
2.3	Samples Collected in the LA/P Watershed	7
2.4	Damage and Repairs.....	8
2.5	Deviations from Work Plan	9
2.5.1	Proposed Modifications to Approved Monitoring Plan	9
2.5.2	Sample Collection Deviations	11
2.5.3	Analytical Suite Deviations	11
3.0	WATERSHED HYDROLOGY	12
3.1	Drainage Areas and Impermeable Surfaces	13
3.2	Water and Sediment Transmission	13
3.3	Impact and Efficiency of Watershed Mitigations.....	16
4.0	ANALYTICAL RESULTS.....	17
4.1	Data Exceptions.....	18
4.2	Filtered and Unfiltered Results	19
4.3	Sediment Transport.....	19
4.4	Relationships between Discharge, Suspended Sediment, and Contaminant Concentrations.....	20
4.5	Dioxins and Furans.....	21
5.0	CONCLUSIONS.....	21
6.0	REFERENCES AND MAP DATA SOURCES	22
6.1	References	22
6.2	Map Data Sources	24

Figures

Figure 1.0-1	Los Alamos and Pueblo canyons showing monitoring locations and stormwater mitigation features.....	25
Figure 2.0-1	Los Alamos and Pueblo canyons drainage areas for each gage and associated rain gages	26
Figure 2.1-1	Watershed mitigations and sampling locations at the retention basins and wetland below the SWMU 01-001(f) drainage.....	27
Figure 3.1-1	Box and whisker plot of suspended sediment concentrations for each station (no suspended sediment samples were collected at E026 or E050.1).....	29
Figure 3.1-2	Cumulative drainage area and fraction of permeable/impermeable area for each station.....	29
Figure 3.2-1	Flow diagram of gage stations and watershed mitigations in Los Alamos/DP and Pueblo/Acid canyons.....	30

Figure 3.2-2	Hydrographs during each sampling event for each canyon from upstream to downstream reaches.....	31
Figure 3.2-3	Discharge and suspended sediment concentration for each station sampled throughout the storm event	42
Figure 3.2-4	Relationship between sediment yield and runoff volume with (top) and without (bottom) August 15 storm at E109.9.....	45
Figure 3.3-2	Box and whisker plot of suspended sediment concentrations (top) and peak discharge (bottom) upstream and downstream of the DP Canyon Watershed Mitigation (left) and Pueblo Canyon Watershed Mitigations (right)	47
Figure 4.4-1	Relationship of suspended sediment to discharge within the LA/P Watershed	48
Figure 4.4-2	Relationship of uranium-238 to suspended sediment within the LA/P Watershed	48
Figure 4.4-3	Relationship of instantaneous discharge to detected constituents in stormwater within the LA/P Watershed	49
Figure 4.4-4	Relationship of suspended sediment to other constituents in stormwater within the LA/P Watershed	53
Figure 4.4-5	Relationship of suspended sediment to plutonium-239/240 and total PCBs within the LA/P Watershed	57
Figure 4.4-6	Relationship of plutonium-239/240 and total PCBs to suspended sediment at E042.1 ..	58

Tables

Table 2.0-1	Station Configuration at LA/P Gages	59
Table 2.2-1	Maximum Discharge and Sampling in the LA/P Watershed	60
Table 2.3-1	Locations and Analytical Suites for Stormwater Samples	61
Table 2.3-2	Analytical Requirements for Stormwater Samples	61
Table 2.3-3	Summary of Samples Collected and Analyses Requested	62
Table 2.3-4	Sampling Sequence for Collection of Stormwater Samples at Upper Watershed Gages.....	85
Table 2.3-5	Sampling Sequence for Collection of Stormwater Samples at Lower Watershed Gages.....	85
Table 2.3-6	Sampling Sequence for Collection of Stormwater Samples at E109.9.....	87
Table 2.5-1	Factors Contributing to Analytical Suite Prioritization	88
Table 3.1-1	Drainage Areas and Impermeable Surface Percentages	90
Table 3.1-2	Correlation Matrix between Cumulative Drainage Area and Suspended Sediment Concentration Statistics	90
Table 3.2-1	Travel Time of Flood Bore, Peak Discharges, Increase or Decrease in Peak Discharge, and Percent Increase/Decrease in Peak Discharge from Upstream to Downstream Stations for All 2010 Storm Events in Acid Canyon	91
Table 3.2-2	Travel Time of Flood Bore, Peak Discharges, Increase or Decrease in Peak Discharge, and Percent Increase/Decrease in Peak Discharge from Upstream to Downstream Stations for All 2010 Storm Events in Pueblo Canyon	93
Table 3.2-3	Travel Time of Flood Bore, Peak Discharges, Increase or Decrease in Peak Discharge, and Percent Increase/Decrease in Peak Discharge from Upstream to Downstream Stations for All 2010 Storm Events in DP Canyon	95

Table 3.2-4	Travel Time of Flood Bore, Peak Discharges, Increase or Decrease in Peak Discharge, and Percent Increase/Decrease in Peak Discharge from Upstream to Downstream Stations for All 2010 Storm Events in Los Alamos Canyon.....	97
Table 3.2-5	Summary of Peak Discharge Increases/Decreases in Acid and Pueblo Canyons.....	99
Table 3.2-6	Summary of Peak Discharge Increases/Decreases in DP and Los Alamos Canyons	99
Table 3.2-7	Pearson's Correlation Coefficients between Discharge and Suspended Sediment for Each Station Sampled throughout the Storm Event	99
Table 3.2-8	Sediment Yield and Runoff Volume for Each Station Sampled throughout the Storm Event	100
Table 4.0-1	NM Aquatic Acute, NM Human Health Persistent, NM Livestock Watering, and NM Wildlife Habitat Screening Levels.....	101
Table 4.0-2	Summary of Maximum Detected Results above Screening Levels at Los Alamos and Pueblo Canyons in Stormwater	102
Table 4.2-1	Comparison of Filtered with Unfiltered Radionuclide Results.....	105
Table 4.2-2	Comparison of Filtered with Unfiltered Inorganic Chemical Results.....	106
Table 4.3-1	Calculated Concentrations of Suspended Sediment and Instantaneous Discharge Determined for Each Sample Collected During 2010 in the LA/P Watershed.....	107
Table 4.4-1	Concentrations of Detected Inorganic Chemicals Normalized to Suspended Sediment Concentrations (Aluminum through Iron).....	119
Table 4.4-2	Concentrations of Detected Inorganic Chemicals Normalized to Suspended Sediment Concentrations (Lead through Zinc)	121
Table 4.4-3	Concentrations of Radionuclides Normalized to Suspended Sediment Concentrations	123
Table 4.4-4	Concentrations of Total PCBs Normalized to Suspended Sediment Concentrations	126
Table 4.4-5	Analytical Results from the Retention Basins and Wetland below the SWMU 01-001(f) Drainage Collected July 26, 2010.....	128
Table 4.5-1	Dioxin/Furan Toxicity Equivalent Factors for the Dibenzodioxins and Dibenzofurans ...	133
Table 4.5-2	Sum of Dioxin/Furan Toxicity Equivalents Expressed as 2,3,7,8-TCDD Dioxin	134

Appendixes

Appendix A	Hydrographs, Hyetographs, and Sedigraphs for Samples Collected
Appendix B	Analytical Results and 5-Minute Discharge Results (on CD include with this document)
Appendix C	Acronyms and Abbreviations, Metric Conversion Table, and Data Qualifiers

1.0 INTRODUCTION

Los Alamos National Laboratory (LANL or the Laboratory) is a multidisciplinary research facility owned by the U.S. Department of Energy (DOE) and managed by Los Alamos National Security, LLC. The Laboratory is located in north-central New Mexico approximately 60 mi northeast of Albuquerque and 20 mi northwest of Santa Fe. The Laboratory site covers 40 mi² of the Pajarito Plateau, which consists of a series of fingerlike mesas separated by deep canyons containing perennial and intermittent streams running from west to east. Mesa tops range in elevation from approximately 7200 to 7800 ft above mean sea level.

This first annual monitoring report provides a summary of analytical monitoring, discharge measurements, and precipitation associated with stormwater collected from the Los Alamos and Pueblo (LA/P) Watershed from May 2010 through October 2010. This annual monitoring report is being prepared pursuant to the New Mexico Environment Department- (NMED-) issued approval with modification of January 11, 2010, (NMED 2010, 108444) for the "Monitoring Plan for Los Alamos and Pueblo Canyons Sediment Transport Mitigation Project" (LANL 2009, 107457). This monitoring plan was generated to support the NMED approved "Interim Measure Work Plan to Mitigate Contaminated Sediment Transport in Los Alamos and Pueblo Canyons" [IMWP] (LANL 2008, 101714) and the "Supplemental Interim Measures Work Plan to Mitigate Contaminated Sediment Transport in Los Alamos and Pueblo Canyons" [SIMWP] (LANL 2008, 105716).

Monitoring objectives are to collect data to allow the evaluation of the effect of watershed mitigations implemented in the LA/P Watershed. The discussion of flow and analytical results for suspended sediment and constituent concentrations is focused to evaluate overall watershed performance with specific emphasis on effects of the mitigations implemented per the "Interim Measures Work Plan to Mitigate Contaminated Sediment Transport in Los Alamos and Pueblo Canyons" (LANL 2008, 101714) and "Supplemental Interim Measures Work Plan to Mitigate Contaminated Sediment Transport in Los Alamos and Pueblo Canyons" (LANL 2008, 105716).

The NMED approval with modification dated January 11, 2010, also directed the Laboratory to monitor stormwater from a location directly below the spillway from the lower retention basin below the Solid Waste Management Unit (SWMU) 01-001(f) drainage.

The watershed addressed in the monitoring report is potentially contaminated with both hazardous and radioactive components. Corrective actions at the Laboratory are subject to a Compliance Order on Consent (the Consent Order). Information on radioactive materials and radionuclides, including the results of sampling and analysis of radioactive constituents, is voluntarily provided to the NMED in accordance with DOE policy.

Watershed mitigations being evaluated include DP Canyon grade-control structure and associated wetlands; Pueblo Canyon cross-vane structures, wing ditch, willow planting, wetlands, and grade-control structure; Los Alamos Canyon low-head weir; and the stormwater retention basins and associated willow planting below the SWMU 01-001(f) drainage in Los Alamos Canyon.

1.1 Project Goals

The mitigations implemented under the IMWP and SIMWP have been implemented with the overall goal of working in concert with each other to minimize the potentially erosive nature of stormwater runoff to enhance deposition of sediment and to reduce or eliminate access of contaminated sediments to flood

erosion. Figure 1.0-1 shows the locations of the mitigations and the gages. In the Pueblo Watershed, the central focus of the mitigations is to maintain a physically, hydrologically, and biologically functioning wetland that can work to reduce peak flows and trap suspended solids due to the presence of thick wetland vegetation. Stabilization and enhancement of the wetland was accomplished with installation of a grade-control structure that is designed to inhibit headcutting at the terminus of the wetland and to promote establishment of additional riparian or wetland vegetation beyond the current terminus of the wetland. Mitigations in upper portions of Pueblo Canyon above the wetland are designed primarily to reduce the flood peaks and enhance channel/floodplain interaction before floods reach the wetland. Gages and monitoring locations are situated within the watershed to monitor the overall hydrology and sediment transport along the length of the watershed, including stations that bound the wetland.

In DP and Los Alamos canyons, mitigations focused on stabilizing and potentially partially burying a wet meadow reach (DP-2) in DP Canyon that is a source of contaminants that are entrained in common floods that originate from a portion of the Los Alamos townsite. A grade-control structure was installed at the terminus of reach DP-2 with a height that may encourage natural channel aggradation, thus inhibiting access to contaminated channel banks during floods. Stabilization and aggradation in reach DP-2 should also encourage spreading of floodwaters, thus reducing peak discharge due to transmission loss within the reach. Lower flood peaks should reduce the erosion of downcanyon contaminants in floodplains. Mitigations in lower Los Alamos Canyon several kilometers below the DP confluence involved removal of accumulated sediment behind the low-head weir and enhancing residence time of floodwaters to enable settling of suspended solids that may have contamination.

Additional mitigations were implemented in Los Alamos Canyon under a separate administrative requirement (NMED 2009, 105858) to address polychlorinated biphenyl (PCB) contamination associated with SWMU 01-001(f). The mitigation actions at that location involved removal of contaminated sediment from a steep mesa slope and construction of retention basins at the bottom of the slope to promote settling of potentially contaminated sediments in runoff from the mesa slope.

This report presents data in the context of performance of these mitigations by evaluating the various metrics for performance, including flow (peak discharge and total discharge) and analytical results for sediment and constituent concentrations to evaluate overall watershed performance. The nature of precipitation events that generate floods is also evaluated as an integral part of the analysis.

2.0 FLOW, PRECIPITATION, AND SAMPLING IN THE LA/P WATERSHED

Measurements of discharge and surface-water sampling are conducted at 13 gages in LA/P canyons. Gages located at five concrete, trapezoidal, supercritical-flow flumes are designated Los Alamos above the Rio Grande (E109.9), Los Alamos below low-head weir (E050.1), Pueblo below grade-control structure (E060.1), DP below grade-control structure (E039.1), and Los Alamos above low-head weir (E042.1). Eight other gages complete the monitoring network in the LA/P Watershed are designated as Pueblo above Acid (E055), South Fork of Acid Canyon (E055.5), Acid above Pueblo (E056), Los Alamos below Ice Rink (E026), Los Alamos above DP Canyon (E030), DP above Technical Area 21 (E038), Pueblo above the wastewater treatment plant (E059), and DP above Los Alamos Canyon (E040). Figure 1.0-1 shows the locations of these gages and watershed mitigations within the Laboratory's property boundary.

Stage height is monitored at 5-minute intervals in the LA/P Watershed at gages identified above. Sutron 8210 and 9210 data loggers store each recorded stage-height measurement as it is made. Discharge is computed for each 5-minute stage measurement using rating curves for each individual gage. Shaft-encoder float sensors installed in stilling wells are used to measure water levels at E026, E030, E039.1,

E042.1, E050.1, E059, E060.1, and E109.9. Self-contained bubbler pressure sensors (Sutron Accubar) are used to measure water levels at E038, E055, E055.5, and E056 and provide backup sensing at E109.9, E050.1, and E060.1. An ultrasonic probe sensor (Siemens Miltronics "The Probe") is used to measure water levels at E040. During 2010, approximately 1,000,000 individual stage measurements were recorded at the 13 gage stations monitored within the LA/P Watershed.

A complete record of 5-min stage-height measurements made for the monitoring year from July 1, 2010, through October 31, 2010, exists at E038, E039.1, E040, E026, E030, E055, E056, and E060.1. As discussed below, five-min stage-height measurements are incomplete at E042.1, E050.1, E109.9, E055.5, and E059. Also as discussed below, one stormwater discharge occurred at E059 on August 5 and was not recorded.

- Five-min stage-height measurements are incomplete at E042.1 between October 13 at 06:15 a.m. and October 18 at 07:35 a.m. No other gage recorded stormwater discharge during the period when E042.1 was inoperative.
- Five-min stage-height measurements are incomplete at E109.9 between September 27 at 08:00 a.m. and October 4 at 08:50 a.m. No other gage recorded stormwater discharge during the period when E109.9 was inoperative.
- Five-min stage-height measurements are incomplete at E055.5 between September 27 at 10:10 a.m. and November 1. No other gage recorded stormwater discharge during the period when E055.5 was inoperative.
- The gage at E050.1 did not begin recording 5-min gage measurements until July 22. An ISCO sampler was operating at E050.1 and did not detect discharge above 10 cubic feet per second (cfs) during the period when stage-height measurements were not made. Stormwater discharge was not observed at gages upstream or downstream of E050.1 during the period when stage height recording at E050.1 was inoperative.
- The gage at E059 did not begin recording 5-min stage-height measurements until August 12. An ISCO sampler was operating at E059 during the period when stage-height measurements were not made. The sampler collected stormwater discharge on August 5; no other discharges exceeding 10 cfs were recognized by the ISCO sampler during the period when stage-height measurements were not made.

Stormwater programs at the Laboratory use precipitation data collected at the Laboratory's meteorological towers that are reported on the LANL Weather Machine. In addition, a seasonal, extended rain gage network is deployed during the months of April through November to coincide with stormwater monitoring periods. Using a geographic information system, stormwater monitoring stations are assigned to an individual rain gage using the method of Thiessen polygons. Rain gages, meteorological towers, and the drainage area for each discharge gage associated with the LA/P Watershed are presented in Figure 2.0-1.

Sampling is conducted using ISCO 3700 portable automated samplers. At E042.1, E050.1, E059, E060.1, and E109.9 two ISCO samplers are installed. At the start of the monitoring year, samplers at these gages were configured to initiate sampling routines using a liquid level actuator set at a height above the channel floor estimated to correspond to storm discharge of 5 or 10 cfs. During the year, these samplers were reconfigured to initiate sampling routines simultaneously when a preset stage height corresponding to discharge of 5 or 10 cfs was recorded at the data logger. Sampler intake lines are uniformly set above the bottom of the channel or gage and are placed perpendicularly to the direction of flow. Trip levels and sampler intake lines are placed as described in Table 2.0-1. Where two samplers are installed, one sampler is configured with a 24-bottle carousel to monitor primarily sediment, and the second sampler is

configured with a 12-bottle carousel to monitor inorganic and organic chemicals and radionuclides. A single sampler configured with a 12-bottle carousel and liquid level actuator is installed at the other locations in the LA/P Watershed to monitor suspended sediment, inorganic and organic chemicals, and radionuclides.

Sampling equipment at gages in LA/P Watershed and the extended rain gage network are shut down in the winter months and reactivated in the spring. ISCO samplers and data loggers do not provide alarms notifying operators of sample collection events. During the 2010 sampling season, requests for field personnel to inspect activated gages and sampling equipment at E042.1, E050.1, E060.1, and E109.9 were inspected at least weekly. Requests for field personnel to inspect gaging and sampling equipment at the other LA/P Watershed gages were issued at least biweekly.

2.1 Sampling at the Retention Basins in the Former LA-SMA-2 Drainage

Three grab samples were collected at the outlets of two constructed basins and wetlands below the SWMU 01-001(f) drainage on July 26. The basins were filled during precipitation on July 22, and remained full during subsequent smaller rains on July 23, 24, and 25. Grab samples were not collected when ponds were actively accepting and discharging stormwater. Instead, samples collected represent residual, low-flow conditions prevalent during the long duration between storms. Discharge measurements were not collected from these constructed features.

Grab sampling locations were identified as CO101040, southeast corner of the upper retention basin near the culvert intake; CO101039, northeast corner of the lower retention basin near the culvert intake; and CO101038, above the culvert at terminus of the wetland below the lower retention basin. Sampling locations and stormwater control features at the retention basins below the SWMU 01-001(f) drainage are identified in Figure 2.1-1.

2.2 Sampling at the Gage Stations in the LA/P Watershed

During the monitoring year, 38 storm events were sampled and analyzed for inorganic and organic chemicals and radionuclides from the 13 gage station in the LA/P Watershed. Maximum daily discharge at all gages where flow exceeded 5 cfs at E050.1, E060.1, and E109.9, or 10 cfs at the other gages is presented in Table 2.2-1.

Because actuators are placed in stream channels at heights approximating discharges of 5 or 10 cfs, samples were collected even though flows did not meet the 10 cfs sampling threshold from discharge at: E039.1 of 6 cfs on July 9; E030 of 7 cfs on July 22, 8 cfs on August 15, and 7 cfs on August 23; E042.1 of 6 cfs on July 31; and E055 of 9 cfs on August 15. Sampling was initiated at E109.9 on September 22 at flow of less than 1 cfs; many samples were collected before discharge exceeded 5 cfs. Sampling was initiated during early June in the LA/P Watershed, thus discharges recorded in May were not sampled.

E038: Samples were collected from five storm events at E038 during the year. A sampler malfunction at E038 on June 30 was not corrected until the subsequent inspection on July 8. As a result, the E038 sampler was inoperative during discharges of 13 cfs on July 2 and 38 cfs on July 3. The sampler at E038 collected stormwater on July 22 and samples were retrieved during the following inspection on July 30. As a result, the sampler was full and did not collect during discharge of 42 cfs on July 25. The sampler at E038 collected stormwater on July 30 and samples were retrieved during the following inspection on August 6. As a result, the sampler was full and did not collect during discharges of 29 cfs on August 4 and 186 cfs on August 5. A sampler malfunction at E038 on August 15 was not corrected until the subsequent inspection on August 27. As a result, the sampler was inoperative during discharges of 156 cfs on

August 15, 202 cfs on August 16, and 160 cfs on August 23. The samples at E038 collected on August 9, September 8, and September 22 were discarded because four samples had been collected during prior storm events and discharges of 63, 47, and 86 cfs, respectively, were less than the discharge of 112 cfs collected on July 22. These samples were not submitted for suspended sediment analyses. The sampler at E038 collected stormwater on October 2 from discharge that did not reach 10 cfs and samples were retrieved and discarded during the following inspection on October 13. Thus, the sampler was full and did not collect during the discharge of 25 cfs on October 5. The sampler at E038 collected stormwater on October 20 and samples were retrieved and submitted for suspended sediment analyses during the following inspection on October 26; therefore, the sampler was full and did not collect during the discharge of 25 cfs on October 21.

E039.1: Samples were collected from five storm events at E039.1 during the year. E039.1 sampling occurred on July 21; however, no discharge was recorded to occur during the day of sample collection and the water collected is of unknown origin. As a result, there is no hydrograph associated with samples collected at E039.1 on July 21. The sampler at E039.1 collected stormwater on July 21 and samples were retrieved during the following inspection on July 29. As a result, the sampler was full and did not collect during discharge of 16 cfs on July 25. The sampler at E039.1 collected stormwater on July 30 and samples were retrieved during the following inspection on August 11. As a result, the E039.1 sampler was full and did not collect during discharge of 276 cfs on August 5 and 16 cfs on August 9. The E039.1 sampler collected stormwater on August 15 and samples were retrieved during the following inspection on August 18. As a result, the sampler was full and did not collect during the discharge of 315 cfs on August 16. No water was collected during the August 23 discharge of 151 cfs at E039.1 because of a sampler malfunction. The sample collected on September 22 at E039.1 was discarded because four samples had been collected during prior storm events and flow of 107 cfs was less than flow of 197 cfs collected on August 15. These samples were not submitted for suspended sediment analyses. The sample collected on October 21 was submitted for suspended sediment analyses.

E040: Samples were collected from four storm events at E040 during the year. The sampler at E040 collected stormwater on July 30 and samples were retrieved during the following inspection on August 9. As a result, the E040 sampler was full and did not collect during discharge of 20 cfs on July 31 and 209 cfs on August 5. The flow of 10 cfs did not trigger the sampler on August 9. The sampler at E040 collected stormwater on August 15 and samples were retrieved during the following inspection on August 23. As a result, the E040 sampler was full and did not collect during discharge of 263 cfs on August 16. The sample collected on September 22 at E040 was discarded because four samples had been collected during previous storm events and flow of 2 cfs, collected because the actuator was set too low in the channel, was less than flow of 86 cfs recorded on August 15 and discharges were less than the 10 cfs trigger.

E026: The sampler at E026 did not collect a sample during the monitoring year. No flows at this gage exceeded 10 cfs.

E030: The sampler at E030 collected water four times during the monitoring year from discharges of less than 10 cfs because the actuator was set too low in the channel. The sampler at E030 collected stormwater on August 15 and samples were retrieved during the following inspection on August 23. As a result, the E030 sampler was full and did not collect during discharge of 30 cfs on August 16.

E042.1: Samples were collected from five storm events at E042.1 during the year. The sampler at E042.1 initiated stormwater collection on July 22, and samples were retrieved during the following inspection on July 27. As a result, the E042.1 sampler was full and did not collect during discharge of 11 cfs on July 25. Discharge of 6 cfs collected on July 31 was collected because the actuator was set too low in the channel. Discharge on August 16 of 99 cfs was larger than any of the previous four discharges where

samples were collected and, as a result, this fifth sample was collected. The samples collected on August 23 from flow of 19 cfs and on September 22 from flow of 18 cfs at E042.1 were discarded because five samples had been collected during previous storm events and flows were less than 99 cfs recorded on August 16.

E050.1: At E050.1 the samplers were not configured to collect stormwater until August 30, which caused three discharges exceeding 5 cfs to be missed. No other discharges exceeding 5 cfs occurred after August 30.

E109.9: Samples were collected from three storm events at E109.9 during the year. The sampler at E109.9 collected stormwater on August 15 and samples were retrieved during the following inspection on August 18. As a result, the E109.9 sampler was full and did not collect during discharge of 243 cfs on August 16. The gage was damaged on August 16 and was still inoperative on August 23. Discharge of 779 cfs on August 23 was estimated from a survey performed on the high-water mark observed during subsequent inspections.

E055.5: Samples were collected from four storm events at E055.5 during the year. The sampler at E055.5 collected stormwater on July 22 and samples were retrieved during the following inspection on July 28. As a result, the E055.5 sampler was full and did not collect during discharge of 31 cfs on July 25. The sampler at E055.5 collected stormwater on August 15 and samples were retrieved during the following inspection on August 20. As a result, the E055.5 sampler was full and did not collect during discharge of 69 cfs on August 16. Discharge of 12 cfs on September 22 did not trigger the sampler, thus a sample was not collected.

E056: Samples were collected from three storm events at E056 during the year. A sampler malfunction at E056 on July 14 was not corrected until the subsequent inspection on July 26. As a result, the E056 sampler was inoperative on July 22, July 24, and July 25 when flows with maximum discharge of 61 cfs, 11 cfs, and 55 cfs, respectively, occurred. The sampler at E056 collected stormwater on August 15 and samples were retrieved during the following inspection on September 1. As a result, the sampler was full and did not collect during discharges of 255 cfs on August 16, 38 cfs on August 17, and 94 cfs on August 23. Discharges of 13 cfs on October 20 and 21 cfs on October 21 did not trigger the sampler, thus samples were not collected.

E055: Samples were collected from three storm events at E055 during the year. The sampler at E055 collected stormwater on August 15 from a flow of 9 cfs and samples were retrieved during the following inspection on September 1. As a result, the E055 sampler was full and did not collect during discharge of 41 cfs on August 16 and 14 cfs on August 23.

E059: Samples were collected from one storm event at E059 during the year. The sampler at E059 collected stormwater on August 5 and samples were retrieved during the following inspection on August 16. As a result, the E059 sampler was full and did not collect during discharge of 49 cfs on August 15. Discharge was not recorded on August 5 during sample collection. Flow was estimated to reach 134 cfs; however, there is no hydrograph associated with samples collected at E059 on August 5. A sampler malfunction at E059 on August 16 was not corrected until the subsequent inspection on August 30. As a result, the E059 sampler was inoperative during discharges of 250 cfs on August 16 at 15:50 and 46 cfs on August 23.

E060.1: At E060.1 one flow exceeded 5 cfs during the field season; discharge of 132 cfs occurred on August 16 and was sampled.

2.3 Samples Collected in the LA/P Watershed

Sample suites vary according to monitoring groups and are based on key indicator constituents for a given portion of the watershed. Analyses were conducted from stormwater collected at gage locations as shown in Table 2.3-1. In cases where insufficient water was collected to perform all planned analyses, analyses were prioritized in the order presented in this table. Additional prioritization of factors is discussed in section 2.5. Up to 22 suspended sediment analyses at the lower watershed gages were collected from a single ISCO sampler containing a 24-bottle carousel. Suspended sediment analyses at all other gages were collected from the first and last sample in an ISCO sampler containing a 12-bottle carousel. Target analyte list (TAL) metals were analyzed in filtered and unfiltered samples at all locations. Radionuclides were analyzed in filtered and unfiltered samples at E109.9. All other analyses were conducted from unfiltered samples. Sample collection times were recorded for each individual sample bottle filled, which allowed more precise estimation of discharge and suspended sediment at the time of sample collection.

Analyses were conducted using the analytical methods shown in Table 2.3-2. Detection limits are given for comparison purposes, but are affected by sample-specific factors that are not known fully until after sample analysis is complete.

The full list of samples collected at each gage station, sample IDs assigned, and analyses requested are given in Table 2.3-3. Hydrographs showing changes in discharge at each gage from each storm event resulting in sample collection were prepared. These hydrographs are overlaid with precipitation measured at associated rain gages and sediment concentrations and are presented in Appendix A.

Discharges from stormwater in the ephemeral channels of the Pajarito Plateau are characterized by rapidly increasing flow and then a gradually declining recessional tail. In order to characterize the transport of indicator constituents during storm events, these indicator constituents can be analyzed from multiple samples collected during the period of flow. In order to capture the point of stormwater discharge where maximum transport of constituents occurs, sampling is initiated near the peak of discharge, which typically occurs approximately 10 minutes following the start of the flood. At the lower watershed gages, sampling for suspended sediment is initiated at the start of flow and continues for 30 minutes at a high frequency to characterize the rapidly changing conditions of the early flood. After 30 minutes, flood energy has typically dissipated and conditions in the water column change more slowly. As a result, stormwater conditions can be characterized with a decreased sampling frequency.

At E026, E030, E038, E039.1, E040, E055.5, E055, and E056, sampling was triggered at a single sampler containing a 12-bottle carousel by discharges approximating 10 cfs. A liquid level actuator placed in the stream channel at a height estimated to correspond to a 10 cfs discharge was used to trigger sampling. Automated samplers initiated filling sample bottles 10 minutes following each triggering discharge. Sample bottles were filled sequentially without a delay between bottles. ISCO programs employed at the Laboratory will fill 1-L sample bottles in 50 to 75 s depending on the distance of the sampler to the sample collection point. Sampling was generally complete 22 minutes following detection of a triggering discharge and 12 minutes following initiation of sampling. Table 2.3-4 shows the idealized sampling sequence for these gages.

At E042.1, E050.1, E059, and E060.1, sampling was triggered at two samplers at each gage by discharges approximating 5 cfs or 10 cfs. At the start of the monitoring year, samplers at these gages were configured to initiate sampling routines using a liquid level actuator set at a height above the channel floor estimated to correspond to storm discharge of 5 or 10 cfs. During the year, these samplers were reconfigured to initiate sampling routines simultaneously when a preset stage height corresponding to a discharge of 5 or 10 cfs was recorded at the data logger. One sampler was fitted with a 12-bottle

carousel and a second sampler was fitted with a 24-bottle carousel. Automated samplers initiated filling sample bottles in the 24-carousel sampler immediately following the triggering discharge. Automated samplers initiated filling sample bottles in the 12-carousel sampler 10 minutes following triggering discharge. In the sampler fitted with a 24-bottle carousel, a delay of 3 minutes was programmed to lapse between filling each of the first 11 bottles. Remaining bottles in the 24-carousel sampler were filled with a 20-minute delay between each bottle. In the sampler fitted with a 12-bottle carousel, after an initial 10-minute delay the first six sample bottles were filled with no delay between each sample bottle. ISCO programs employed at the Laboratory will fill 1-L sample bottles in 50 to 75 s depending on the distance of the sampler to the sample collection point. The six remaining bottles were filled in pairs with a delay of 45 minutes between each pair. All bottles in the 24-bottle carousel were filled within 290 minutes from initiation of sampling. All bottles in the 12-bottle carousel were filled within 152 minutes from initiation of sampling. Table 2.3-5 shows the idealized sampling sequence for these gages.

At E109.9, sampling was triggered at two samplers by discharges exceeding 5 cfs. At the start of the monitoring year, samplers at E109.9 were configured to initiate sampling routines using a liquid level actuator set at a height above the channel floor estimated to correspond to storm discharge of 5 or 10 cfs. During the year, these samplers were reconfigured to initiate sampling routines simultaneously when a preset stage height corresponding to 5 cfs was recorded at the data logger. Automated samplers initiated filling sample bottles in the 24-carousel sampler immediately following triggering discharge. Automated samplers initiated filling sample bottles in the 12-carousel sampler 10 minutes following triggering discharge. In the sampler fitted with a 24-bottle carousel, a delay of 2 minutes was programmed to lapse between filling each of the first 16 bottles. Remaining bottles in the 24-carousel sampler were filled with a 20-minute delay between each bottle. In the sampler fitted with a 12-bottle carousel, after an initial 10-minute delay, the first six sample bottles were filled with no delay between each sample bottle. ISCO programs employed at the Laboratory will fill 1-L sample bottles in 50 to 75 s depending on the distance of the sampler to the sample collection point. The six remaining bottles were filled in pairs with a delay of 45 minutes between each pair. All bottles in the 24-bottle carousel were filled in 190 minutes from initiation of sampling. All bottles in the 12-bottle carousel were filled within 152 minutes from initiation of sampling. Table 2.3-6 shows the idealized sampling protocol for this gage.

2.4 Damage and Repairs

Control structures in the Los Alamos and Pueblo canyons Watershed were damaged by storms occurring on August 15, 16, and 23, 2010. Damage assessments were prepared as part of the “Interim Assessment to Report Storm Damage to Sediment Control Structures and Monitoring Stations in Los Alamos and Pueblo Canyons” (LANL 2010, 111125). The DP Canyon grade-control structure was not damaged during storms in 2010, but additions to the structure were installed and completed on December 22, 2010.

Repairs were completed at the Pueblo Canyon grade-control structure on December 16, 2010. The 75-ft long x 3-ft wide x 5-ft deep trench that eroded on the upstream face of the structure was repaired by excavating a 5-ft wide trench down to a minimum of 1 ft below the existing bottom of the gabions, installing filter fabric at the bottom of the trench and along the face of the structure, and refilling and compacting the trench with clean fill. Erosion on the upstream southwest corner of the gabion structure was repaired by filling the scoured area with riprap. The 30-ft long x 4-ft wide x 5-ft deep eroded portion of stream bank directly downstream of the structure was repaired by regrading the downstream surfaces and installing riprap on the new surface.

Three Pueblo Canyon cross-vane structures were extensively damaged. Final recommendation will be presented in the May 2011 annual geomorphic conditions report based on full analysis of available data.

Repairs to the gage at E109.9 were completed on November 5, 2010. Damaged wire-enclosed riprap downstream of E109.9 was replaced with a gabion mattress and torn geotextile was replaced. Wire-enclosed riprap upstream of the flume was repaired by filling voids with rock, flattening bulges in the riprap, and inspecting and restoring wire lacing and connections as necessary. Large loose boulders upstream and downstream of the flume were removed.

The stilling well and flume at E109.9 were silted and the bubbler was damaged during storms on August 15–16. The flume and stilling well were cleared of approximately 1.5 ft of silt and coarse sand on August 18. The stilling well was again silted with approximately 3 in. of silt and sand during the storm on August 23, partially blocking the lowest intake. The stilling well remained partially silted and could not be completely cleared during inspections on August 31; September 8, 15, 23, and 28; October 6, 20, and 25; November 1, 8, 15, 22, and 29; and December 15, 2010 and January 5 and 11, 2011. Gage measurements were able to be recorded during this period. Attempts were made to completely clear the stilling well on August 24, November 22, December 3, and December 15. The stilling well was completely cleared on January 19, 2011. The bubbler was reassembled during October, but was disassembled again during repair of the riprap downstream of the flume in early November. The bubbler was reinstalled on November 12.

2.5 Deviations from Work Plan

2.5.1 Proposed Modifications to Approved Monitoring Plan

A number of modifications were made to the approved monitoring plan (LANL 2009, 107457; NMED 2010, 108444). These modifications were partly driven by limitations associated with the configuration and programming of the automated ISCO samplers. Another motivation for some of the modifications was to more cost-effectively meet the two primary monitoring objectives of (1) evaluating and comparing water quality above and below the primary structures in Los Alamos and Pueblo Canyons near the Laboratory boundary and in lower Los Alamos Canyon near the Rio Grande, and (2) comparing mass flux of sediments and associated contaminants above and below these structures and in lower Los Alamos Canyon. Secondary objectives were to evaluate upcanyon sources for contaminants transported in individual events and to evaluate the form of radionuclides that reach the Rio Grande (dissolved or colloidal vs associated with sediment particles).

These modifications were initially discussed in a meeting on April 22, 2010, between representatives of the NMED DOE Oversight Bureau (OB) and Los Alamos National Security, LLC. The modifications discussed in the meeting were presented to the NMED OB on May 12, 2010, and verbal approval to proceed with the modifications to the work plan was received by the Laboratory on June 3, 2010. These proposed modifications are summarized below.

- The Laboratory proposed to do no compositing of samples and instead perform all analyses on discrete samples collected at specific times. This modification was proposed to eliminate potential errors in interpretation associated with time-weighted averages, which are less useful than volume-weighted averages or discrete samples collected over short (e.g., 1-min) time periods. This modification would also make sample processing at the analytical laboratory simpler and more reliable.
- The Laboratory proposed to increase the analytical suite at gages E042 and E059 to be identical to the suite at the three downstream gages (E050, E060.1, and E109.9). This modification was proposed to provide enhanced identification of anticipated downstream reductions in concentrations of all contaminants. In the original plan, E042 and E059 had smaller suites that matched upstream gages. These five gages are referred to as the “lower watershed” gages in this report.

- The Laboratory proposed to collect many more samples for suspended sediment concentration (SSC) through the hydrograph at each lower watershed gage than specified in the original plan (up to 22 discrete vs 4 composite), devoting a second ISCO at each gage largely to SSC samples. This modification was proposed to provide a more accurate and cost-effective determination of total suspended sediment flux in each event. Based on prior work by the NMED OB, the Laboratory expected to be able to obtain good correlations between contaminant concentrations and SSC, allowing simultaneous determination of total contaminant flux in each event. Sample collection for SSC would begin once the trigger level was reached, with bottles being collected at 2-min or 3-min intervals during the first 30 min of each event, and bottles at 20-min intervals after that, for a total duration of up to 4 hr 50 min. The variable intervals in the first 30 min at different gages would be required to obtain the full desired analytical suite early in each event. The specific sampling sequence proposed for each gage is presented in Table 3 of the 2011 monitoring plan (LANL 2011, 201578).
- The Laboratory proposed to collect four samples at each of the five lower watershed gages in each event only for “key contaminants,” specifically PCBs, plutonium isotopes, and gamma spectroscopy radionuclides (cesium-137). Analyses of the other “full-suite” analytes would be obtained from single samples early in each event (around the peak of the hydrograph) when SSC and contaminant concentrations were expected to be highest. This modification was proposed to allow the Laboratory to obtain most of the planned analyses except SSC using a single 12-bottle carousel that can accommodate 1-L glass bottles for analysis of organic compounds. Supplemental analyses would be obtained on samples collected using the SSC ISCO. The sampling sequence would begin with filling of the six full-suite sample bottles with no gap between samples over a 5-min period (beginning 10 min after the trigger level is reached, as specified by NMED). The next two sample bottles (bottles 7 and 8) for PCBs and key radionuclides would be filled 45 min later. Similarly, bottles 9 and 10 would be collected 45 min later; and bottles 11 and 12, 45 min later.
- The Laboratory proposed to add analyses of metals and gross alpha to the analytical suite for the upper Pueblo Canyon and Acid Canyon gages (E055, E055.5, and E060) to help evaluate sources of key water quality constituents. These analyses were not in the original plan or requested by NMED.
- The Laboratory proposed to obtain single sets of analyses for individual analytes in each event at the gages in the upper Los Alamos and Pueblo Canyon watersheds, with the exception of SSC. The original plan specified up to four sets of analyses for each analyte through each hydrograph, but these additional analyses at upstream gages are not required to evaluate structure performance or contaminant sources. Sample collection would be at equivalent times on the hydrographs as for the lower watershed gages to allow direct comparison. The first and last sample bottles would be used for SSC analyses to bound SSC for the remaining analyses.
- The Laboratory proposed to obtain analyses of radionuclides from filtered samples at gage E109.9 to evaluate potential dissolved or colloidal constituents reaching the Rio Grande. Although the original plan also specified obtaining radionuclide analyses from filtered samples at E050 and E060 (now E060.1), the Laboratory proposed to omit these analyses because they are not necessary for evaluating potential impacts on the Rio Grande and would require additional sample bottles from the SSC carousel and compromise the quality of the sedigraph.
- The Laboratory proposed to add measurements of hardness for all samples with metals analysis to aid in water quality data interpretation.
- The Laboratory proposed to add radium-226, radium-228, and gross beta to the analytical suite at E050, E060.1, and E109.9 at the request of the Buckman Direct Diversion Board.

- The Laboratory proposed to annually review data and the sampling strategy and make recommendations for modifications to the plan, if appropriate. The original plan specified review after 2 yr of data collection, but the Laboratory expected some modifications might be appropriate after the first year of data collection.

The proposed modifications to the approved work plan described above were implemented during 2010.

2.5.2 Sample Collection Deviations

The Laboratory did not collect samples during the majority of storm events that met the criteria for required sampling. Deviations and the reason for each deviation are described in section 2.2.

2.5.3 Analytical Suite Deviations

The Laboratory did not analyze runoff from each storm event for all constituents in the analytical suites listed in Table 2.3-1. Instead, analyses were performed as described in Table 2.3-3. Deviations between the planned and performed analyses are due to (1) collection of incomplete sample volumes, (2) a requirement that organic analyses be conducted in samples collected in glass bottles, (3) a requirement that boron analyzed as part of the TAL metal suite be conducted in samples collected in polyethylene bottles, and (4) detection limit requirements for volumes, as specified in Table 2.3-2. Table 2.5-1 contains a more complete prioritization matrix, which was used to help guide submission of samples for analyses during 2010. Specific analytical suite deviations during 2010 are described below.

At E038 on June 24, 2010, 5 L of water was collected in polyethylene bottles and 4 L of water was collected in glass bottles. Remaining bottles were unfilled. All water collected in glass was submitted for organic analyses. The first and last liters of water collected in polyethylene were submitted for analyses of suspended sediment. The remaining 3 L collected in polyethylene was insufficient to perform all remaining analyses, so the lowest-priority analysis, gross alpha, was not conducted.

At E040 on August 15, 2010, 0.9 L of water was collected in four polyethylene bottles, and 0.4 L of water was collected in one glass bottle. Organic analyses could not be performed with the volume collected in glass to meet required detection limits, so organic analyses were not conducted. The first and last bottles of water collected in polyethylene were submitted for analyses of suspended sediment. The three bottles remaining contained 1 L of water and were used to perform analyses of TAL metals and gross alpha. Required detection limits for gamma spectroscopy, isotopic plutonium, isotopic uranium, americium-241, and strontium-90 could not be achieved with the volume of sample collected and, therefore, those analyses were not conducted.

At E040 on August 23, 2010, 1.5 L of water was collected in two polyethylene bottles, and 2.0 L of water was collected in three glass bottles. PCB analysis was performed from 1.5 L of water collected in two glass bottles. The first polyethylene bottle containing 1 L and last glass bottle containing 0.5 L of water were submitted for analyses of suspended sediment. The polyethylene bottle remaining was partially filled and was submitted for gross alpha analysis. Required detection limits for TAL metals, gamma spectroscopy, isotopic plutonium, isotopic uranium, americium-241, and strontium-90 could not be achieved with the volume of sample collected and, therefore, those analyses were not conducted.

At E042.1 on July 31, 2010, bottles 6 and 12 were unfilled. From the initial six bottles, 2.4 L of water was collected in three polyethylene bottles and 1.6 L of water was collected in two glass bottles. Repeat analyses were successful except for bottle 12. The lowest-priority analysis, gross alpha, was not conducted.

At E042.1 on August 15, 2010, polyethylene bottles in carousel positions 5, 6, and 10 were unfilled. From the initial six bottles, 0.6 L of water was collected in two polyethylene bottles and 1.1 L of water was collected in two glass bottles. Organic analyses were performed from water collected in glass bottles. Gamma spectroscopy, isotopic plutonium, isotopic uranium, americium-241, and strontium-90 were conducted from the volume collected in polyethylene. Lower-priority analyses of TAL metals and gross alpha were not conducted.

At E042.1 on August 16, a polyethylene bottle in carousel position 6 was unfilled. From the initial six bottles, 2.25 L of water was collected in three polyethylene bottles and 1.5 L of water was collected in two glass bottles. Organic analyses were performed from water collected in glass bottles. Gamma spectroscopy, isotopic plutonium, isotopic uranium, americium-241, strontium-90, and TAL metals were conducted from the volume collected in polyethylene. The lowest-priority analysis of gross alpha was not conducted.

At E109.9 on August 23, the 12-carousel ISCO sampler did not collect water; the sampler intake line clogged with silt and sand. The 24-carousel ISCO did collect 12.6 L of water in 19 polyethylene bottles. Organic analyses could not be performed from water collected in polyethylene.

At E109.9 on September 22, 2010, the 12-carousel ISCO sampler did not collect polyethylene bottles in carousel positions 5 and 6. The 24-carousel ISCO sampler collected 15 L of water in 20 polyethylene bottles. From the initial six bottles, 1.8 L of water was collected in two polyethylene bottles and 2 L of water was collected in two glass bottles. Organic analyses were performed from water collected in glass bottles. Filtered and unfiltered analyses of gamma spectroscopy, isotopic plutonium, isotopic uranium, americium-241, strontium-90, radium-226, radium-228 and TAL metals were conducted from the volume collected from both ISCO samplers in polyethylene bottles. The lowest-priority analyses of gross alpha and gross beta were not conducted.

At E059 on August 5, 2010, the 12-carousel ISCO sampler did not collect polyethylene bottles in carousel positions 5 and 6. The 24-carousel ISCO sampler collected 11 L of water in 13 polyethylene bottles. From the initial six bottles, 1.4 L of water was collected in two polyethylene bottles and 2 L of water was collected in two glass bottles. Organic analyses were performed from water collected in glass bottles. Analyses of gamma spectroscopy, isotopic plutonium, isotopic uranium, americium-241, and strontium-90 were conducted from the volume collected from both ISCO samplers in polyethylene bottles. The lower-priority analyses of TAL metals, hardness, and gross alpha were not conducted.

At E060.1 on August 16, 2010, the 12-carousel ISCO sampler did not collect polyethylene bottles in carousel position 6. The 24-carousel ISCO sampler collected 13.6 L of water in 20 polyethylene bottles. From the initial 6 bottles, 3 L of water was collected in three polyethylene bottles and 2 L of water was collected in two glass bottles. Organic analyses were performed from water collected in glass bottles. Analyses of gamma spectroscopy, isotopic plutonium, isotopic uranium, americium-241, strontium-90, and TAL metals were conducted from the volume collected from both ISCO samplers in polyethylene bottles. The lowest-priority analysis of gross alpha was not conducted.

3.0 WATERSHED HYDROLOGY

The topography, geology, geomorphology, and meteorology of LA/P Watershed are quite complex, including finger mesas, slot-like canyons, and large elevation gradients; alluvium, volcanic tuff, pumice, and basalt; ephemeral streams, constantly evolving stream networks (both laterally and vertically), and sediment-laden stream discharge; heavy winter snowfall that creates spring snowmelt, intense summer

monsoonal rainfall, and occasional late summer to fall tropical storm activity. Consequently, monitoring of the LA/P Watershed runoff is also complex and challenging.

3.1 Drainage Areas and Impermeable Surfaces

Drainage areas unique to each gage station (Figure 2.0-1) were developed using the ArcHydro Data Model in ArcGIS. Model inputs were developed using an elevation grid created from 4-ft light detecting and ranging (LIDAR) images, a digital elevation model from 2000, surface-water drainage culverts from Los Alamos National Laboratory and Los Alamos County, and manual site-specific controls based on field assessments. Each drainage area defines the area that drains to the particular gage station from either the next upstream gage station or the headwaters of the watershed as determined by the model inputs.

The impermeable surface area was derived from the urban-sparse-bare rock land cover type within the taxonomic-level classification system developed in the Land Cover Map for the Eastern Jemez Region (McKown et al. 2003, 087150). The specific grid data set selected to provide the land cover type was the quarter-hectare smoothed taxonomic level. Within each gage station drainage area, the urban-sparse-bare rock land cover type was spatially queried for total acreage based upon the number of 50 ft x 50 ft grid cells that fell within the drainage boundary. This total area was then divided by the total area of the entire drainage area to derive the percent impermeable surface area. The following assumptions were made in the determination of the percent impermeable surface area: (1) the only available land cover data was from 2002–2003, therefore newer impermeable surfaces may not be captured; and (2) urban-sparse-bare rock grid cells that may have overlapped two drainage areas were spatially queried based upon where the center of the cell resided rather than the exact amount of each cell that fell within each drainage area.

A significant factor in the frequency of discharge at each gage is the ratio of permeable to impermeable surface area discharging to the gage or within the canyon drainage (Table 3.1-1). The gage at E109.9 measures discharge from a total drainage area encompassing 37,800 acres, but E055.5 drains 52.7 acres. Yet, E055.5, with 81% impermeable surface area, recorded discharge greater than 5 cfs eight times and E109.9, with 9% impermeable surface area, recorded discharge greater than 5 cfs four times during this same time period. Discharge was recorded every day any flow occurred at: E038 with 88% impermeable surface area; E039.1 with 57% total impermeable surface area; and E056 with 72% total impermeable surface area.

It is insightful to examine suspended sediment concentration statistics (Figure 3.1-1) for each station with respect to the cumulative drainage area (Figure 3.1-2) because the correlation between the two is quite high (Table 3.1-2). In general, these positive correlations signify that the larger the drainage area, the greater the concentration of suspended sediments in the runoff, as one would expect. However, the impermeable surface area is more highly correlated to suspended sediment than the permeable or total drainage area, suggesting that the amount of sediment in the runoff is strongly related to the impermeable surface area contributing to a station. Converting permeable surfaces to impermeable surfaces can increase the peak and shorten the duration of a hydrograph (Weng 2001, 111760; Huang et al. 2008, 111755), thereby creating a conduit for sediment to reach the stream and increasing suspended sediments measured at a gage.

3.2 Water and Sediment Transmission

Figure 3.2-1 is a flow diagram of the LA/P canyons, displaying each gage station and the location of watershed mitigations. For the storm events that were sampled, Figure 3.2-2 displays the hydrographs for each canyon from upstream to downstream; thus, it is useful to consider the progression of the gage

stations downstream while examining the hydrographs. Tables 3.2-1 through 3.2-4 provide a summary of the flood bore transmission downstream for each canyon, including travel time of flood bore from the upstream to the downstream station, peak discharges of the flood bore at the station, and the percent reduction in peak discharge between the stations for every storm event in 2010. The flood bore is defined as the leading edge of the storm hydrograph as it transmits downcanyon and peak discharge is the maximum flow rate measured during a flood. In Acid and Pueblo canyons, transmission was computed between E055 and E056 to E060.1 because E059 was not fully operable until August 15. Focus was placed on peak discharge because it is related to stream power, and in ephemeral streams in semiarid climates, the greater the stream power, the greater the erosive force, hence the greater the sediment transport ((Bagnold 1977, 111753; Graf 1983, 111754; Lane et al. 1994, 111757). Also note that the peak discharges in Tables 3.2-1 through 3.2-4 are conceptually different than those in Table 2.2-1 due to temporal resolution; that is, Table 2.2-1 shows daily peak discharges (midnight to midnight) and Tables 3.2-1 through 3.2-4 show peak discharges for a particular storm event.

For all of the canyons, the flood bore moves from upstream to downstream, increasing or decreasing in power by means of alluvial groundwater and tributary contributions and/or channel and hillslope infiltration. The only exception in 2010 was in Acid and Pueblo canyons during the large storm events on August 15 when the intensity of the precipitation prevented the flood bore from reaching the downstream station before the runoff from the downstream station's own watershed. Because of the extremely localized precipitation in Los Alamos and the surrounding canyons and mountains, travel times and peak discharge increases/decreases vary substantially (Tables 3.2-1 through 3.2-4). Also, there is little to no relationship between peak discharge magnitudes, travel times between stations, or peak discharge increases/decreases. However, a summary of the peak discharge increases and decreases (Tables 3.2-5 and 3.2-6) between stations provides insight into the stream network.

In the upper watershed (E055.5 to E056) of Acid Canyon, the peak discharge increases in 18 of 26 events (74% average increase), indicating that this channel section tends to gain rather than lose volume. In the upper watershed of Pueblo Canyon (E055 to E059), there are a similar number of large increases in peak discharge (four of eight events, 77% average increase) as there are large decreases (four of eight events, 100% average decrease), indicating that the location of the precipitation has a considerable impact on the flow in the headwaters. Downstream, the large decreases far outweigh the increases until the final stretch of the watershed, E060.1 to E109.9. In this stretch, peak discharge increases in seven of eight events (100% average increase), indicating that this channel section tends to gain rather than lose volume. Additional runoff contributions to E109.9 can come from Guaje Canyon (E099), E050.1, or hillside watersheds along the channel. Guaje Canyon is monitored for flow, though the wide, open channel makes it difficult to develop a reliable rating curve. However, increases in stage height were measured at E099 on August 15, 16, 23, and September 22 (the four events when the peak discharge increased from E060.1 to E109.9). (See Appendix A.) Discharge was measured at E060.1 on August 16 (132 cfs and at E050.1 on August 15 and 16 (31 and 79 cfs, respectively), which may have contributed to discharge at E109.9. Also note that between E055, E056, and E059 to E060.1, which have flow paths that traverse the Pueblo Canyon Watershed mitigations, the peak discharge decreases for 40 of 41 events, the only increase (E055 to E060.1, 69% increase) occurring during the very large August 16 storm when the grade-control structure failed. This indicates that the mitigations are potentially performing well.

In DP Canyon, the upper channel (E038 to E039.1) traverses the DP Canyon Watershed mitigations. The fact that the peak discharge decreases in 26 of 33 events (72% average decrease) indicates that the mitigations are potentially performing well. From E039.1 to E040, there are many more decreases in peak discharge than increases (31 of 31 events, 72% average decrease), indicating further reduction in the erosive force. In Los Alamos Canyon, the peak discharge increases in the upper watershed (E026 to E030) for all 10 events (76% average increase), most likely due to additional runoff from the drainage area associated with E030 and the difference in percent of impermeable area draining to the two stations

(30% at E030 in contrast to 2% at E026). As one progresses down LA Canyon, the confluence of E030 and E040 is located just downstream of the gage stations, with E042.1 at the bottom of the canyon just above the LA Canyon low-head weir. From E030 to E042.1, the peak discharge increases in 12 of 13 events (65% average increase); however, from E040 to E042.1, the peak discharge decreases in 15 of 18 events (70% average decrease). Also, the peak discharges are generally much higher at E040 than at E030. This pattern is assumed to be due to the larger percent of total, or nested, impermeable area draining to E040 (50%) in contrast to E030 (7%).

The LA Canyon low-head weir is located between E042.1 and E050.1, through which the peak discharge decreases for the entire 10 storm events (77% average decrease). For six storm events, the flow is reduced completely (100% average decrease). The erosive force may be reduced; thus the watershed mitigation is potentially performing well. In the final stretch of the Los Alamos Canyon Watershed E050.1 to E109.9, the peak discharge increases for two storm events (79% average increase), and decreases for four storm events (84% average decrease). As discussed previously, stage height measured in Guaje Canyon increased during the two storm events (August 15 and 16) when peak discharge increased from E050.1 to E109.9; thus runoff from Guaje Canyon may have contributed to discharge measured at E109.9. (See Appendix A.) Discharge was measured at E060.1 on August 16 (132 cfs) and at E050.1 on August 15 and 16 (31 and 79 cfs, respectively), which may have contributed to discharge at E109.9.

Figure 3.2-3 shows the hydrograph and sedigraph for each station that was sampled throughout a storm event. Table 3.2-7 shows the Pearson's correlation coefficients between the discharge and suspended sediment for these stations and storm events. Concurrent times as well as various time lags are displayed. Pearson's correlation coefficients are computed as follows:

$$corr_{Q_t, SSC_t} = \frac{\sum_{t=0}^n (Q_t - \bar{Q})(SSC_t - \overline{SSC})}{\sqrt{\sum_{t=0}^n (Q_t - \bar{Q})^2 \sum_{t=0}^n (SSC_t - \overline{SSC})^2}} \quad \text{Equation 3.2-1}$$

where Q_t is the discharge at time t , SSC_t is the suspended sediment concentration at time t , n is the number of measurements to be correlated ($t = 1, 2, \dots, n$), and

$$\bar{Q} = \frac{\sum_{t=0}^n Q_t}{n} \quad \text{Equation 3.2-2}$$

$$\overline{SSC} = \frac{\sum_{t=0}^n SSC_t}{n} \quad \text{Equation 3.2-3}$$

The peak SSC can occur after the peak discharge, thus lags between 0 and 30 min are presented with the discharge lagging behind the SSC in order to align the peaks (after 30 min, the correlations were reduced for all of the stations and all of the storm events). For example, when computing the Pearson's correlation coefficient between Q_t and SSC_{t+5} , the SSC time series begins 5 min after the discharge time series.

On August 15 at E109.9, initially high suspended sediment concentrations were produced from flows of 20 cfs and were possibly related to loading of sediment in the channel by bank collapse and burrowing. First storms of the year might also be expected to produce higher suspended sediment concentrations. Stations E042.1 and E060.1 have high positive correlations at varying time lags (0 to 30 minutes), but E109.9 is less so. Figure 3.2-4 displays the linear relationship between sediment yield and runoff volume for the stations where suspended sediment was measured throughout the storm event; Table 3.2-8 contains the values displayed in Figure 3.2-4. Although suspended sediment and instantaneous discharge are not always highly correlated as a result of localized precipitation, sediment availability, or antecedent conditions, the linear relationship between sediment yield and runoff volume for a watershed is well established (Onodera et al. 1993, 111759; Nichols 2006, 111758; Mingguo et al. 2007, 111756).

The runoff volume for each storm was computed as follows

$$V = \sum_{i=0}^n Q(t_i)(t_{i+1} - t_i) \quad , \quad \text{Equation 3.2-4}$$

where n = the number of instantaneous discharge measurements taken throughout the storm event,

t = the time, i , at which an instantaneous discharge measurement is taken, and

$Q(t_i)$ = the discharge (ft³/s) at time t_i (multiplied by 60 to convert from ft³/s to ft³/min).

The mass of sediment for each storm event was computed by

$$M = \sum_{j=0}^n Q(t_j)(t_{j+1} - t_j) SSC(t_j) \quad , \quad \text{Equation 3.2-5}$$

where n = the number of suspended sediment samples taken throughout the storm event,

t_j = the time, j , at which an suspended sediment sample is taken,

$Q(t_j)$ = the discharge (ft³/s) at time t_j interpolated from the instantaneous discharge measurements taken at time t_i (multiplied by 60 to convert from ft³/s to ft³/min), and

$SSC(t_j)$ = the suspended sediment concentration (mg/L) at time t_j (multiplied by 28.3×10^{-6} to convert from mg/L to kg/ft³).

In Appendix A, hydrographs, precipitation, and suspended sediment are displayed for each date and station that samples were collected. The precipitation shown is associated with the precipitation-station-based Thiessen polygons that overlay the individual gage's watershed area, thus are theoretically contributing to the discharge measured at the station. In developing the Thiessen polygons, the entire contributing watershed area to Los Alamos National Laboratory was used as the boundary. While this can cause some error, it is deemed the best method to determine the area associated with a particular precipitation gage. As expected, the discharge lags the precipitation, and when there are several pulses in the hyetograph, there are consequential peaks in the hydrograph. Suspended sediment is much less predictable with no definitive trend between concentration magnitude, peak discharge, or time to peak.

3.3 Impact and Efficiency of Watershed Mitigations

Grade-control structures are constructed to reduce erosive flood energy and to cause upstream aggradation to fill existing stream channels, bury existing floodplain deposits, and support wetland health. As a consequence of the aggradation they promote and the wetlands they support, grade-control structures should reduce sediment transported during flood events. Cross-vane structures are constructed to decrease flood peaks to reduce the erosive force of the rising floodwaters before floods entering downstream wetlands. Cross-vane structures may also enhance deposition of sediment. Wing ditches divert floodwater from the main channel into adjacent floodplains to decrease surface water flow velocities. Willow planting is done to aid in surface stabilization, flow reduction, and sediment accumulation.

DP Canyon during 2010: Sampling conducted in DP Canyon on July 9 and July 30 was performed above (E038) and below (E039.1) the watershed mitigations. Analyses performed from samples collected during these storms allow direct evaluation of the DP Canyon Watershed mitigations. Sampling was conducted from similar portions of each storm. A 45-minute delay occurred between initiation of sampling and the maximum discharge at E038 and E039.1 on July 9. On July 30, a 29-minute delay occurred between initiation of sampling at E038 and E039.1, and a 35-minute delay occurred between maximum discharges from the two gages. Samples collected for suspended sediment analyses initiate and conclude sample

collection at E038 and E039.1. Between these two stations for these two storms, the average relative percent difference (RPD) is 34% decreasing (three of the four samples) and 29% increasing (one of the four samples).

Decreasing stormwater velocity allows for infiltration to be increased. Increasing infiltration reduces the distance that a storm surge travels in the stream channel and decreases the distance that inorganic and organic chemicals and radionuclides entrained in the water column travel. Increasing infiltration reduces peak discharge (see Figure 3.3-1), but also decreases the total volume of stormwater volume passing the gage station. Throughout 2010, the peak discharge decreased in 26 of 32 storm events between E038 and E039.1, with an average decrease of 72% (Table 3.2-6). A reduction in runoff volume and suspended sediment concentrations was observed related to watershed mitigations between E038 and E039.1 on July 9 and July 30. On July 9, total runoff volume was reduced from 1.1 acre-feet at E038 to 0.3 acre-feet at E039.1. Not counting runoff unique to the E039.1 drainage area, 0.8-acre feet of stormwater was absorbed between the two gage stations. On July 30, total runoff volume was reduced from 2.7 acre-feet at E038 to 2.3 acre-feet at E039.1. Again, not counting runoff unique to the E039.1 drainage area, 0.4 acre-feet infiltrated between the two gage stations.

In addition to examining coinciding sampling events, watershed mitigation performance can be assessed by examining overall statistics for 2010. Figure 3-3.2 displays box and whisker plots for E038 and E039.1 for both suspended sediment concentrations and peak discharge. These plots show that the DP Canyon Watershed mitigations may be reducing the suspended sediment concentrations and peak discharge (i.e., erosive force), thus are potentially performing well.

Pueblo Canyon during 2010: No sampling was performed in Pueblo Canyon above (E059) and below (E060.1) the watershed mitigations for the same storm. Therefore, overall statistics for 2010 must be used to assess performance. Figure 3.3-2 displays box and whisker plots for E059 and E060.1 for both suspended sediment concentrations and peak discharge. As can be seen in these plots, the Pueblo Canyon Watershed mitigations may be reducing the suspended sediment concentrations and peak discharge (i.e., erosive force), thus are potentially performing well.

4.0 ANALYTICAL RESULTS

Appendix B contains all analytical results obtained from stormwater runoff samples collected in Los Alamos and Pueblo canyons during 2010.

As explained in the work plan for implementing the control structures addressed by this monitoring report, the structures were installed as part of an interim measure under section VII.B of the Consent Order (LANL 2008, 101714) to mitigate transport of contaminated sediments in the Los Alamos and Pueblo canyons Watershed. The analytical results from monitoring are presented and evaluated within this context. The control structures were not installed with the objective of reducing concentrations of waterborne contaminants to specific levels, and the analytical results are not compared with water quality standards or other criteria for that purpose or to evaluate compliance with regulatory requirements. For this report, monitoring results are compared with water quality standards for the purpose of narrowing the list of specific constituents for conceptual model discussions in this report and to provide a basis for potential future revisions to the analytical suites. The New Mexico Water Quality Control Commission (NMWQCC) Standards for Interstate and Intrastate Surface Waters (New Mexico Administrative Code 20.6.4) establish surface water standards for New Mexico. The NMWQCC classifies all surface water within the Laboratory boundary with segment-specific designated uses. The LA/P stream segments are classified as ephemeral or intermittent, with designated uses of limited aquatic life, livestock watering, wildlife habitat, and secondary contact. Some of the standards are for total concentrations, which are compared with data from

unfiltered surface water samples. Other standards are for dissolved concentrations, which are compared with data from filtered samples. Table 4.0-1 presents the NMWQCC standards that were used as numeric values for comparison with monitoring results for the purposes stated above. Table 4.0-2 presents the comparison of detected analytical results with these comparison values.

When chemicals and radionuclides have comparison values for multiple designated uses, the smallest value is selected for comparison with analytical results. Analytical constituents consistently detected above these values include gross alpha and total PCBs. Other radionuclides consistently detected, but without comparison values, include plutonium-239/240, cesium-137, uranium-234, uranium-235/236, uranium-238, and strontium-90.

4.1 Data Exceptions

Several of the suspended sediment concentrations measured from stormwater samples collected at E042.1 on August 16 are not representative of field conditions. During this particular event, the maximum discharge corresponds to the smallest sediment concentrations, and sediment concentrations fluctuate in ways unlike those observed in samples collected from other sampling events. The suspended sediment associated with these samples collected at E042.1 on August 16 cannot be used for evaluation of watershed mitigation performance. The remainder of the samples collected at E042.1 are representative, however, and can be used to evaluate performance.

Sampling at E039.1 occurred on July 21. However, no discharge and no precipitation were recorded to occur during the day of sample collection. Water collected is of unknown origin. There is no hydrograph associated with samples collected at E039.1 on July 21. Analytical results are not representative of stormwater, thus cannot be used for evaluation of watershed mitigation performance. Interviews with field personnel, reinspection of sampling and datalogging equipment, and re-review of field inspection notes could not resolve the 24 h, 30 min discrepancy between sample collection and discharge measurements.

Sampling at E059 occurred on August 5 before the gage was fully prepared to collect stage-height measurements. Therefore, discharge from this day is estimated and there is no measured hydrograph associated with this storm.

Sampling at E109.9 occurred on August 23 at a time when stage-height measurements from the encoder were invalid because of silting and the damaged bubbler from the August 16 storm. As a result, peak discharge was estimated from the high water mark left by the storm. There is not a usable hydrograph associated with this storm.

During 2010, field crews were authorized to perform inspections weekly for gages and samplers at E042.1, E059, E050.1, E060.1, and E109.9, and every 2 wk at other Los Alamos and Pueblo Canyon locations. This inspection frequency was unable to satisfy stakeholder concerns for timeliness of repairs to ensure proper stage measurement and sample collection functionality. During 2011, field crews have been authorized to perform inspections of gages and sampling equipment at Los Alamos and Pueblo Canyon locations weekly. Inspections are also authorized to occur at sampling and stage measurement equipment on the day following rain that results in discharge at E050.1, E060.1, or E109.9 or rain that exceeds 0.25 in. in 30-min intensity at any associated rain gage. Additionally, flumes at E039.1, E042.1, E050.1, E060.1, and E109.9 are inspected for silting after each rain event and cleaned on the first workday after silting occurs. If inspectors are unable to effect repairs of damaged equipment at the time of inspection, additional resources are brought to the repair as soon as those resources can be made available.

Several samples collected at E109.9 on August 15, 2010, intended for dissolved radiochemical analyses, were not filtered. Samples planned for filtration that were unfiltered are WTLAP-10-18402, analyzed for radium-226 and radium-228; WTLAP-10-18461, analyzed for strontium-90; and WTLAP-10-18442, analyzed for gamma spectroscopy, isotopic uranium, isotopic plutonium, and americium-241. Unfiltered results returned for these samples were reclassified as field duplicate records of the unfiltered sample records.

4.2 Filtered and Unfiltered Results

Filtered and unfiltered results were obtained from all inorganic chemical analyses and from radionuclide analyses at E109.9. Comparisons of filtered and unfiltered radionuclide results are presented in Table 4.2-1. Filtered and unfiltered pairs were obtained once for each nuclide. Comparisons of filtered and unfiltered inorganic chemical results are presented in Table 4.2-2. Filtered and unfiltered pairs were obtained 33 times for each inorganic chemical. Organic chemicals were not analyzed from filtered samples.

For the TAL metals, less than one-half of unfiltered results are detected for mercury, selenium, and thallium. Silver, cadmium, and chromium are largely reduced to below detection limits in the filtered result. Because of the high frequency of nondetected results, these TAL metals are excluded from subsequent unfiltered/filtered comparisons.

The RPD of each detected pair helps to show the influence of filtration on analytical results. A five-fold reduction from the unfiltered to filtered analytical result corresponds to a 133% RPD. A two-fold reduction from the unfiltered to filtered analytical result corresponds to a 66% RPD. Aluminum, barium, beryllium, copper, iron, manganese, nickel, lead, uranium, vanadium, and zinc express an average RPD greater than 133% in detected, filtered analytical results. Arsenic, calcium, cobalt, magnesium, and potassium expressed average RPDs greater than 66%, but less than or equal to 133% in detected, filtered analytical results. The average of detected boron, sodium, and antimony filtered results expressed RPDs less than 66%.

4.3 Sediment Transport

Discharge was calculated from stage height using a rating curve, which is the relationship between discharge in cubic feet per second and height of the water in feet, developed for each individual gage. Stage height was measured at 5-minute intervals, logged continuously during each sampled storm event. Suspended sediment was measured up to 22 times at E042.1, E059, and E060.1 during the first 290 minutes of each storm. Suspended sediment was measured up to 18 times at E109.9 during the first 190 minutes of each storm. At other gages, suspended sediment was measured immediately before and following sampling for inorganic and organic chemicals and radionuclides.

Suspended sediment and instantaneous discharge estimates are calculated for each analytical result using a linear relationship between the two corresponding analytically-determined suspended sediment concentrations or the two corresponding discharge measurements, as follows

$$y = mx + b \quad , \quad \text{Equation 4.3-1}$$

where y = the calculated concentration of suspended sediment or discharge at the time of sample collection,

m = the slope of the line,

x = the time differential in minutes between suspended sediment sample collection or discharge measurements, and

b = the concentration of analytically-determined sediment before sample analyses or corresponding discharge measurements.

The slope m is determined by dividing the difference in sediment concentrations between samples collected before and following analytical sample collection by the difference in minutes between the sample collection times of the samples collected immediately before and following analytical sample collection.

Using this equation, concentrations of suspended sediment and instantaneous discharge are calculated for each sample collected. The calculated suspended sediment concentrations and instantaneous discharges are presented in Table 4.3-1.

4.4 Relationships between Discharge, Suspended Sediment, and Contaminant Concentrations

The quality of relationships between calculated suspended sediment concentrations, calculated instantaneous discharge, and analytical results obtained provide insight into performance of watershed mitigation installed in the LA/P Watershed and the usefulness of future monitoring strategies.

Analyte concentrations, including suspended sediment, generally show a poor correlation to instantaneous discharge. The relationship of calculated, instantaneous discharge to suspended sediment at all LA/P gages during 2010 is displayed in Figure 4.4-1. Across the watershed, instantaneous discharge is poorly correlated to suspended sediment concentrations. Instead, instantaneous sediment transport is more accurately related to the particle sizes of sediment being transported in the water column; transport velocity of suspended load as affected by stream grade, channel obstructions, and other factors; settling velocity of particles; and channel bed shear stress due to grain resistance as impacted by recent soil disturbances, wetland condition, channel erosion and channel composition among other factors (Scott 2006, 111789). These conditions can vary between gages in the same channel and between storms at the same gage.

Suspended sediment concentrations can be used as a predictor of many inorganic chemicals and radionuclides in unfiltered samples. Uranium-238 expresses a strong linear relationship to sediment concentration in the LA/P Watershed as displayed in Figure 4.4-2.

Sixteen frequently detected inorganic chemicals and radionuclides were selected to show the relationship between instantaneous discharge and corresponding analyte concentration (Figure 4.4-3). These 16 chemicals and radionuclides were evaluated to show the relationship between suspended sediment concentrations and corresponding analyte concentration (Figure 4.4-4). All correlations between instantaneous discharge and analyte concentrations are negative. The correlations between suspended sediment concentrations and unfiltered detected results are considerably stronger. Inorganic results obtained from E109.9 on August 15 and September 22 can be identified as outliers but are retained in both sets of figures for comparison. Analyses of isotopic uranium from these sampling events at E109.9 do not exhibit similar deviation from the correlation, suggesting that sample preparation and analytical processes have a significant impact on these very high suspended sediment content samples.

In contrast, plutonium-239/240 and total PCBs across the LA/P Watershed are not linearly correlated to suspended sediment concentrations as shown in Figure 4.4-5. The lack of correlation results from a spatial distribution of this radionuclide and class of organic chemicals across the LA/P Watershed. PCBs and plutonium-239/240 are widely distributed in sediment deposits in the Los Alamos and Pueblo Watershed, and their spatial distribution indicates that they have multiple sources, including both Laboratory and non-Laboratory sources. Acid Canyon, DP Canyon, and the drainage below SWMU 01-001(f) in Los Alamos Canyon have all undergone cleanup to remove PCB sources, and yet remain a

source of detectable PCBs in stormwater (LANL 2008, 101714). Acid Canyon and DP Canyon both received radioactive liquid discharges containing plutonium. Atmospheric deposition of plutonium and PCBs are also a significant contributor to inventory of these constituents in Laboratory stormwater (Gallaher and Efurd 2002, 082602).

However, even at a single gaging station, the relationships between plutonium-239/240 and total PCBs to suspended sediment concentrations are not consistent. The relationships of these constituents measured at E042.1 during storm events sampled this year are shown in Figure 4.4-6. At this single station, equations describing the relationship between suspended sediment and plutonium-239/240 or total PCBs have very poor correlation. This lack of a single equation indicates that plutonium-239/240 and total PCBs are not homogeneously distributed through sediments reaching E042.1 during storm events. Because of the paucity of samples collected, correlations cannot be determined for plutonium-239/240 and total PCBs in Los Alamos and Pueblo Canyons. Continued monitoring is necessary to demonstrate attenuation of plutonium-239/240 and total PCB concentrations in stormwater.

Because suspended sediment concentrations vary widely, it is useful to normalize inorganic chemical and radionuclide concentrations to sediment concentrations in which a correlation exists between suspended sediment and an analyte across the LA/P Watershed. After normalization, inorganic chemicals are converted to milligrams per kilogram units of measure and can be compared with canyon sediment background values (LANL 1998, 059730). Normalizing results to SSCs can be misleading for analytes having no preferential attachment to sediment. Concentrations of strontium-90, boron, sodium, and calcium are least affected by filtration so are most biased by normalization. Uncertainty of normalized results is also larger than the non-normalized analytical result uncertainty because it includes the very large total measurement error of the calculated suspended sediment result. Table 4.4-1 presents the results of this normalization and comparison of inorganic chemicals from aluminum through iron, Table 4.4-2 presents normalized results for lead through zinc. Table 4.4-3 presents normalized results for radionuclides, and Table 4.4-4 presents normalized results for PCBs.

Analytical results for samples collected at the retention basins and wetland below the SWMU 01-001(f) drainage represent residual, low-flow conditions prevalent during the long duration between storms and are presented in Table 4.4-5. Total PCBs collected at the terminus of the wetland are almost 30 times less concentrated than total PCBs collected in the upper retention basin. Suspended sediment is reduced two times in the same samples. Lead is reduced almost five times. Concentrations of total and isotopic uranium, hardness, and gross-alpha and gross-beta radioactivity increased as water passed through the retention basins to the wetland.

4.5 Dioxins and Furans

Results for polychlorinated dibenzodioxin and dibenzofuran congeners were converted to concentrations equivalent in toxicity (toxic equivalents [TEQs]) to 2,3,7,8-tetrachlorodibenzodioxin (2,3,7,8-TCDD). The TEQs were calculated using the toxicity equivalence factors (TEFs) presented in Table 4.5-1. The detected concentration of each congener is multiplied by its TEF and these products are summed for each detected congener to obtain the TEQ for a sample. The TEQs for each sample analyzed for dioxins and furans are presented in Table 4.5-2.

5.0 CONCLUSIONS

The mitigations implemented in the Los Alamos and Pueblo canyons Watershed are relatively new features that in some cases are expected to take at least one runoff season to begin to show

representative performance. Some positive effects of the mitigations, including reductions of peak discharge, sediment deposition, and contaminant transport, were observed during this monitoring year and will be reevaluated during sampling that will occur during 2011. However, the nature and location of storms in 2010 did not result in a comprehensive contaminant data set for assessment of the effects of the mitigations on contaminant concentrations within a storm or between storms to determine a sense of long-term performance expectations for the mitigations.

Long-term assessment of overall watershed and mitigations performance will be greatly enabled through establishment of key relations between flow, suspended solids concentrations, and contaminant concentrations. The 2010 data set provided some insights into these critical relationships. For example, the 2010 data set indicates that inorganic and organic chemicals and radionuclides show generally poor correlations to suspended sediment concentrations for legacy constituents measured across the watershed, and also poor correlations at individual gages. Stronger correlations are observed between suspended sediment concentrations and naturally occurring constituents in sediment. Although instantaneous maximum discharge and suspended sediment concentrations are not well correlated, total runoff volume and total sediment yield for each storm are strongly correlated.

Ongoing monitoring in 2011 is expected to enhance the data set and will advance the conceptual model for these relationships and further enable performance assessment of the mitigations.

6.0 REFERENCES AND MAP DATA SOURCES

6.1 References

The following list includes all documents cited in this report. Parenthetical information following each reference provides the author(s), publication date, and ER ID. This information is also included in text citations. ER IDs are assigned by the Environmental Programs Directorate's Records Processing Facility (RPF) and are used to locate the document at the RPF and, where applicable, in the master reference set.

Copies of the master reference set are maintained at the NMED Hazardous Waste Bureau and the Directorate. The set was developed to ensure that the administrative authority has all material needed to review this document, and it is updated with every document submitted to the administrative authority. Documents previously submitted to the administrative authority are not included.

Bagnold, R.A., April 1977. "Bed Load Transport by Natural Rivers," Water Resources Research, Vol. 13, No. 2, pp. 303–312. (Bagnold 1977, 111753)

Gallaher, B., and D.E. Efurd, August 2002. "Plutonium and Uranium from Los Alamos National Laboratory in Sediments of the Northern Rio Grande Valley," Los Alamos National Laboratory report LA-13974-PR, Los Alamos, New Mexico. (Gallaher and Efurd 2002, 082602)

Graf, W.L., September 1983. "Downstream Changes in Stream Power in the Henry Mountains, Utah," Annals of the Association of American Geographers, Vol. 73, No. 3, pp. 373–387. (Graf 1983, 111754)

Huang, H., S. Cheng, J. Wen, and J. Lee, June 30, 2008. "Effect of Growing Watershed Imperviousness on Hydrograph Parameters and Peak Discharge," Hydrological Processes, Vol. 22, No. 13, pp. 2075–2085. (Huang et al. 2008, 111755)

Lane, L.J., M.H. Nichols, M. Hernandez, C. Manetsch, and W.R. Osterkamp, December 12–16, 1994. "Variability in Discharge, Stream Power, and Particle-Size Distributions in Ephemeral-Stream

- Channel Systems,” in *Variability in Stream Erosion and Sediment Transport*, Proceedings of the Canberra Symposium, December 12–16, 1994, International Association of Hydrological Sciences publication no. 224, pp. 335–342. (Lane et al. 1994, 111757)
- LANL (Los Alamos National Laboratory), September 22, 1998. “Inorganic and Radionuclide Background Data for Soils, Canyon Sediments, and Bandelier Tuff at Los Alamos National Laboratory,” Los Alamos National Laboratory document LA-UR-98-4847, Los Alamos, New Mexico. (LANL 1998, 059730)
- LANL (Los Alamos National Laboratory), February 2008. “Interim Measure Work Plan to Mitigate Contaminated Sediment Transport in Los Alamos and Pueblo Canyons,” Los Alamos National Laboratory document LA-UR-08-1071, Los Alamos, New Mexico. (LANL 2008, 101714)
- LANL (Los Alamos National Laboratory), October 2008. “Supplemental Interim Measures Work Plan to Mitigate Contaminated Sediment Transport in Los Alamos and Pueblo Canyons,” Los Alamos National Laboratory document LA-UR-08-6588, Los Alamos, New Mexico. (LANL 2008, 105716)
- LANL (Los Alamos National Laboratory), October 2009. “Monitoring Plan for Los Alamos and Pueblo Canyons Sediment Transport Mitigation Project,” Los Alamos National Laboratory document LA-UR-09-6563, Los Alamos, New Mexico. (LANL 2009, 107457)
- LANL (Los Alamos National Laboratory), October 2010. “Interim Assessment to Report Storm Damage to Sediment Control Structures and Monitoring Stations in Los Alamos and Pueblo Canyons,” Los Alamos National Laboratory document LA-UR-10-7281, Los Alamos, New Mexico. (LANL 2010, 111125)
- LANL (Los Alamos National Laboratory), March 2011. “2011 Monitoring Plan for Los Alamos and Pueblo Canyons Sediment Transport Mitigation Project,” Los Alamos National Laboratory document LA-UR-11-0943, Los Alamos, New Mexico. (LANL 2011, 201578)
- McKown, B., S.W. Koch, R.G. Balice, and P. Neville, June 2003. “Land Cover Map for the Eastern Jemez Region,” Los Alamos National Laboratory report LA-14029, Los Alamos, New Mexico. (McKown et al. 2003, 087150)
- Mingguo, Z., C. Qiangguo, and C. Hao, September 2007. “Effect of Vegetation on Runoff-Sediment Yield Relationship at Different Spatial Scales in Hilly Areas of the Loess Plateau, North China,” *Acta Ecologica Sinica*, Vol. 27, No. 9, pp. 3572–3581. (Mingguo et al. 2007, 111756)
- Nichols, M.H., January 2006. “Measured Sediment Yield Rates from Semiarid Rangeland Watersheds,” *Rangeland Ecology and Management*, Vol. 59, No. 1, pp. 55–62. (Nichols 2006, 111758)
- NMED (New Mexico Environment Department), May 5, 2009. “Approval with Modifications, Los Alamos Site Monitoring Area 2 (LA-SMA-2) Interim Measure and Monitoring Plan to Mitigate Contaminated Sediment Transport in Los Alamos Canyon,” New Mexico Environment Department letter to D. Gregory (DOE-LASO) and D. McInroy (LANL) from J.P. Bearzi (NMED-HWB), Santa Fe, New Mexico. (NMED 2009, 105858)
- NMED (New Mexico Environment Department), January 11, 2010. “Approval with Modifications, Los Alamos and Pueblo Canyons Sediment Transport Monitoring Plan,” New Mexico Environment Department letter to G.J. Rael (DOE-LASO) and M.J. Graham (LANL) from J.P. Bearzi (NMED-HWB), Santa Fe, New Mexico. (NMED 2010, 108444)

- Onodera, S., J. Wakui, H. Morishita, and E. Matsumoto, July 1993. "Seasonal Variation of Sediment Yield on a Gentle Slope in Semi-Arid Region, Tanzania," in *Sediment Problems: Strategies for Monitoring, Prediction and Control*, Proceedings of the Yokohama Symposium, July 1993, International Association of Hydrological Sciences publication no. 217, pp. 29–37. (Onodera et al. 1993, 111759)
- Scott, H.S., September 2006. "Predicting Sediment Transport Dynamics in Ephemeral Channels: A Review of Literature," U.S. Army Corps of Engineers Report No. ERDC/CHL CHETN-V11-6. (Scott 2006, 111789)
- Weng, Q., December 2001. "Modeling Urban Growth Effects on Surface Runoff with the Integration of Remote Sensing and GIS," *Environmental Management*, Vol. 28, No. 6, pp. 737–748. (Weng 2001, 111760)

6.2 Map Data Sources

Paved Road Arcs; Los Alamos National Laboratory, KSL Site Support Services, Planning, Locating and Mapping Section; 06 January 2004; as published 29 November 2010.

Structures; Los Alamos National Laboratory, KSL Site Support Services, Planning, Locating and Mapping Section; 06 January 2004; as published 29 November 2010.

Summer/Winter rain gage locations and networks; Los Alamos National Laboratory, Environmental Programs; Unpublished 2010 project data, Project 10-0027.

Gage stations; Los Alamos National Laboratory, Environmental Programs; Unpublished 2011 project data, Project 11-0002; locations based on WQDB data pull from January 5, 2011.

Gage drainage areas; Los Alamos National Laboratory, Environmental Programs; Unpublished 2011 project data, Project 11-0002; areas developed using the ArcHydro data model.

25

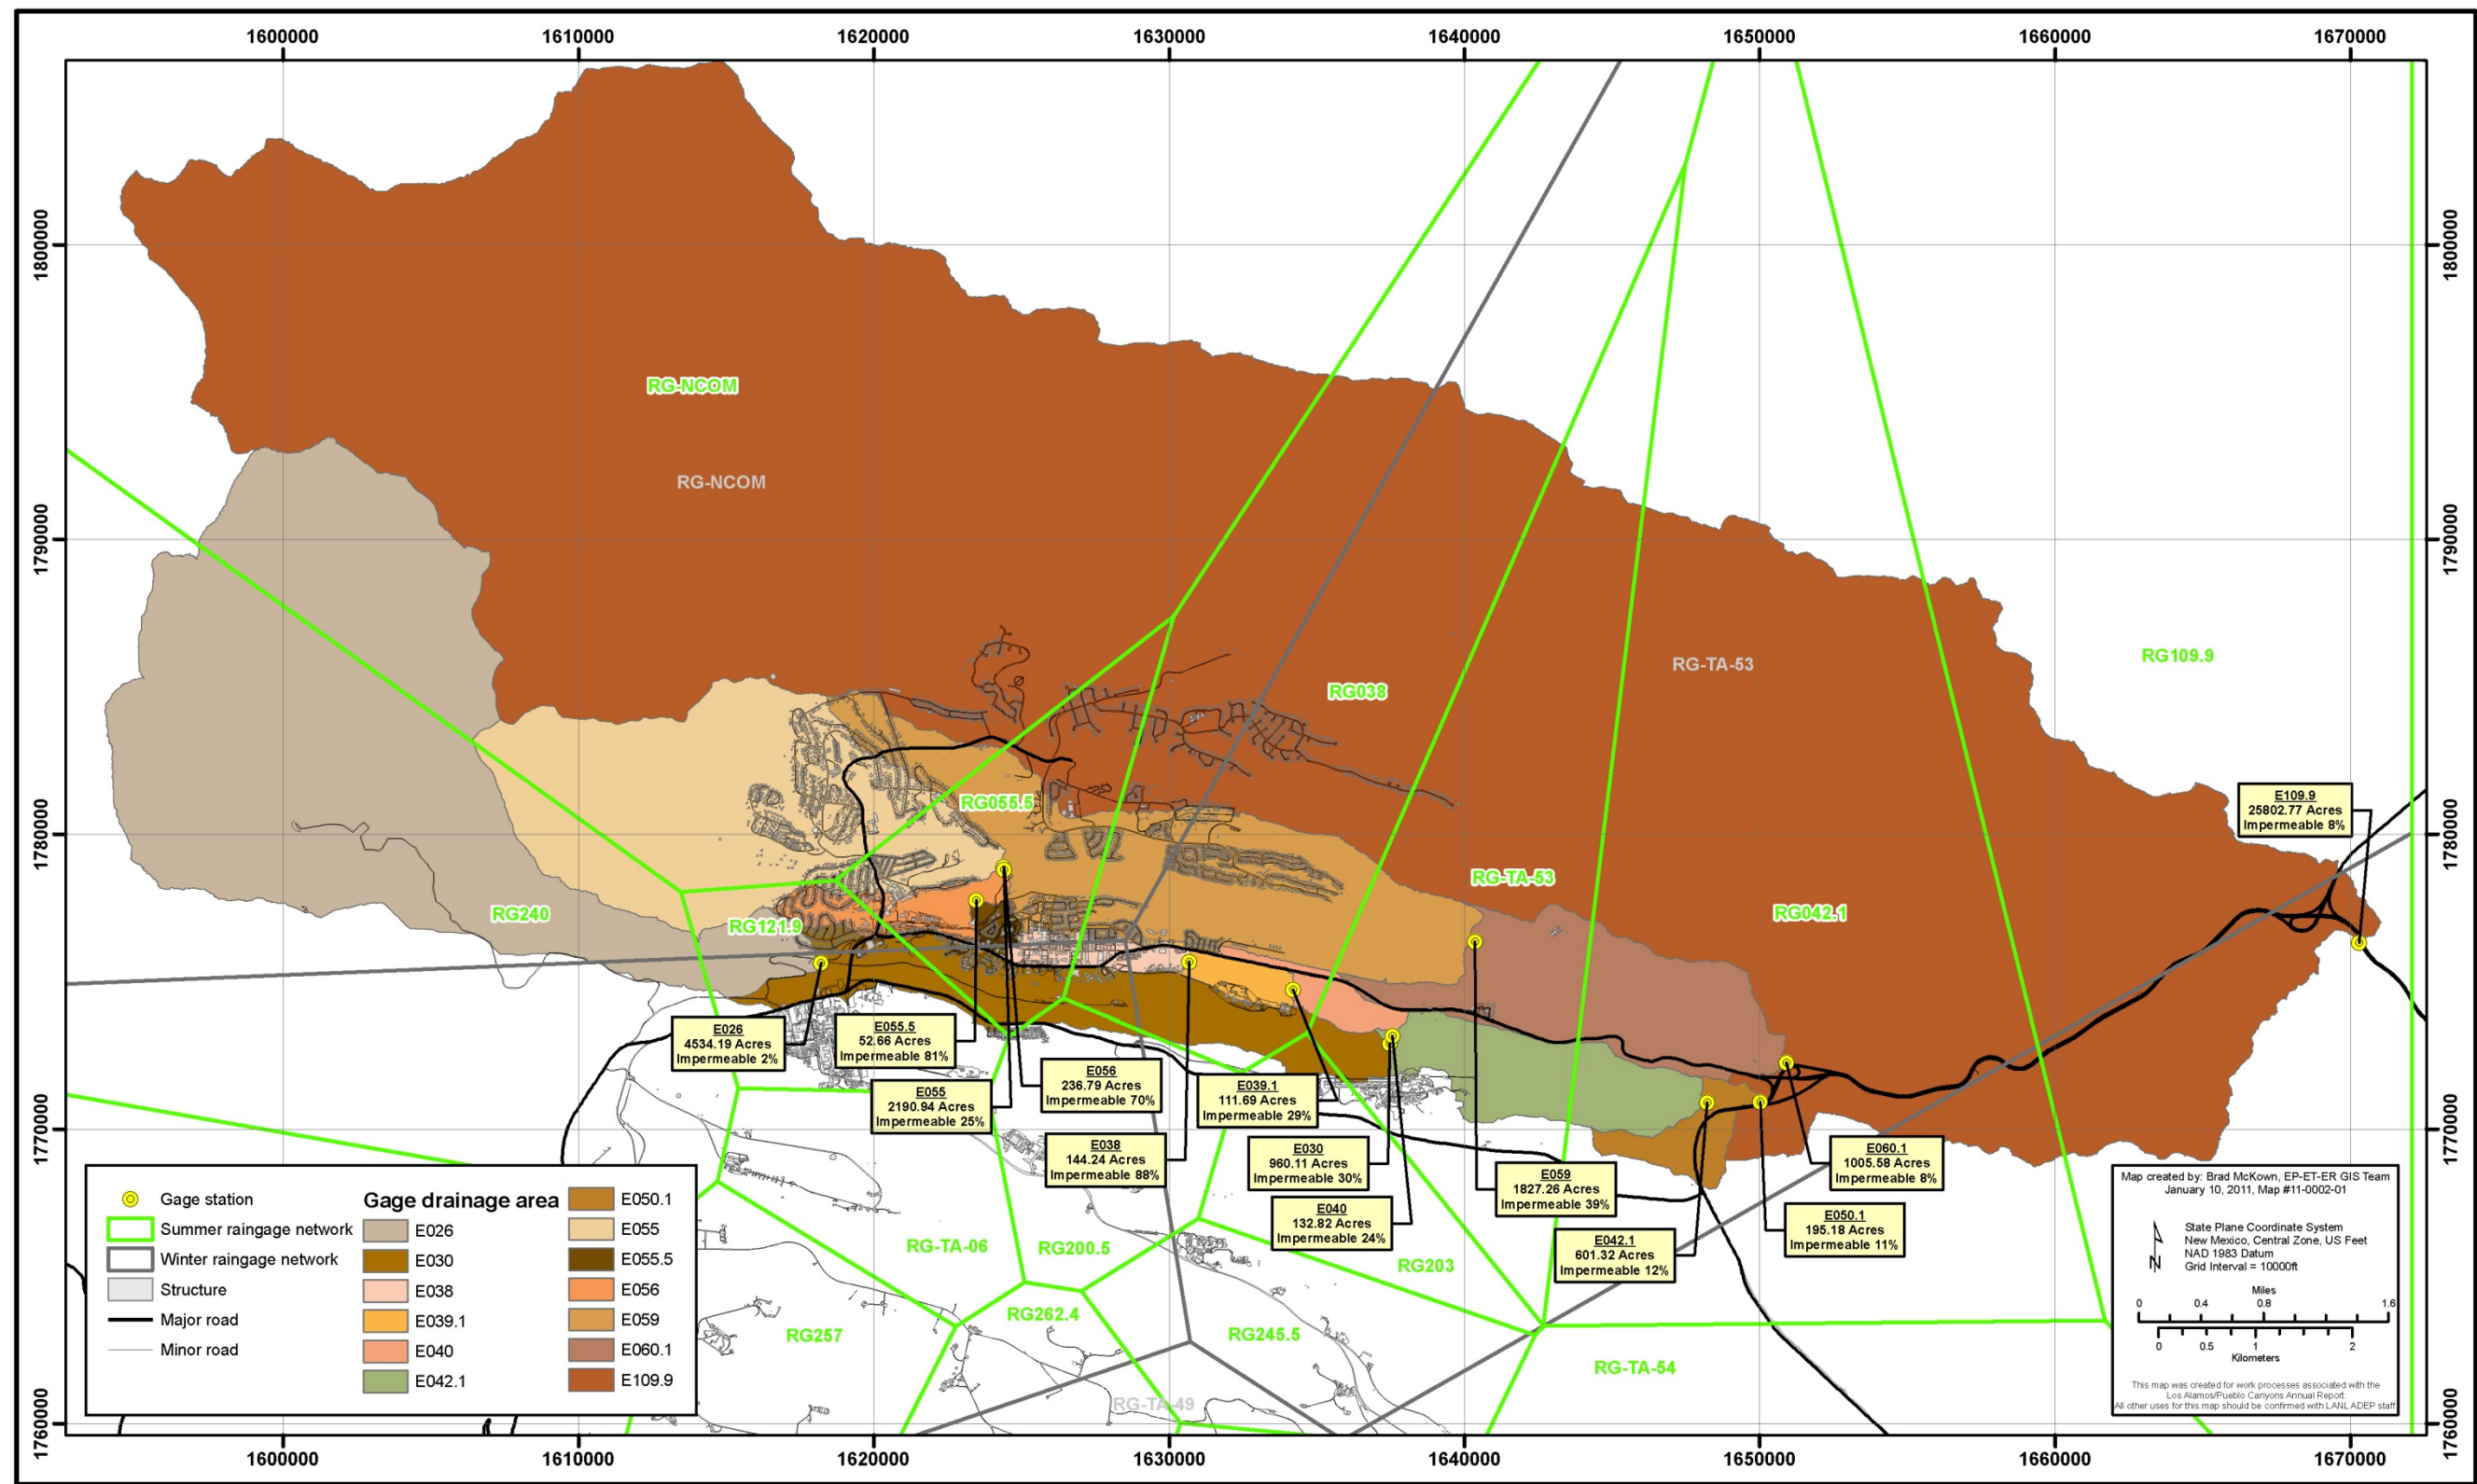


Figure 2.0-1 Los Alamos and Pueblo canyons drainage areas for each gage and associated rain gages

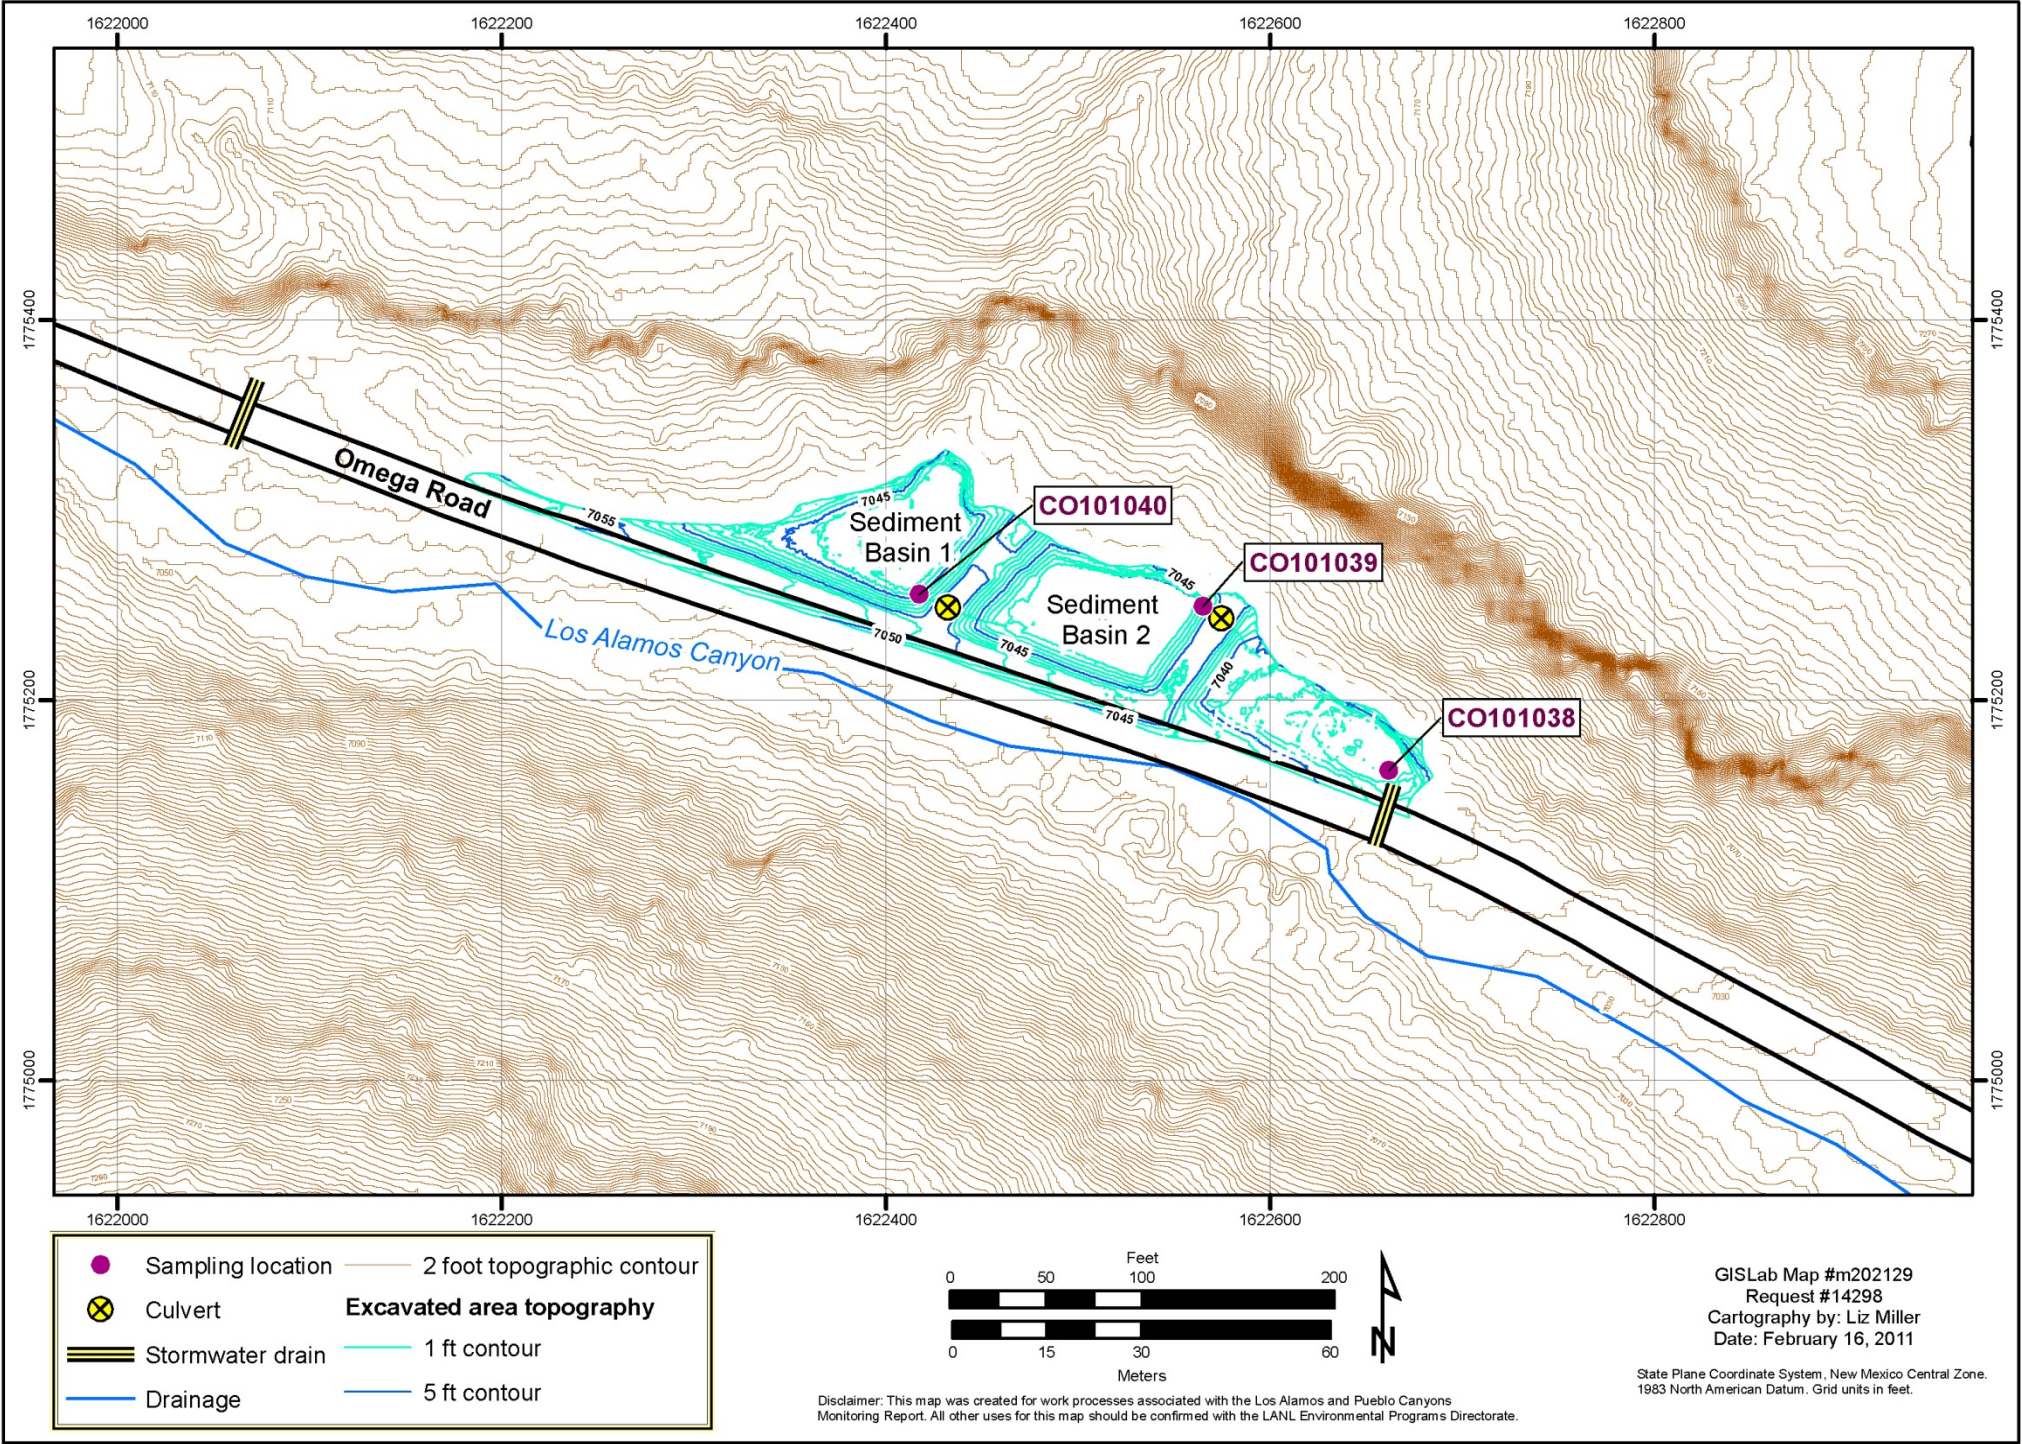


Figure 2.1-1 Watershed mitigations and sampling locations at the retention basins and wetland below the SWMU 01-001(f) drainage

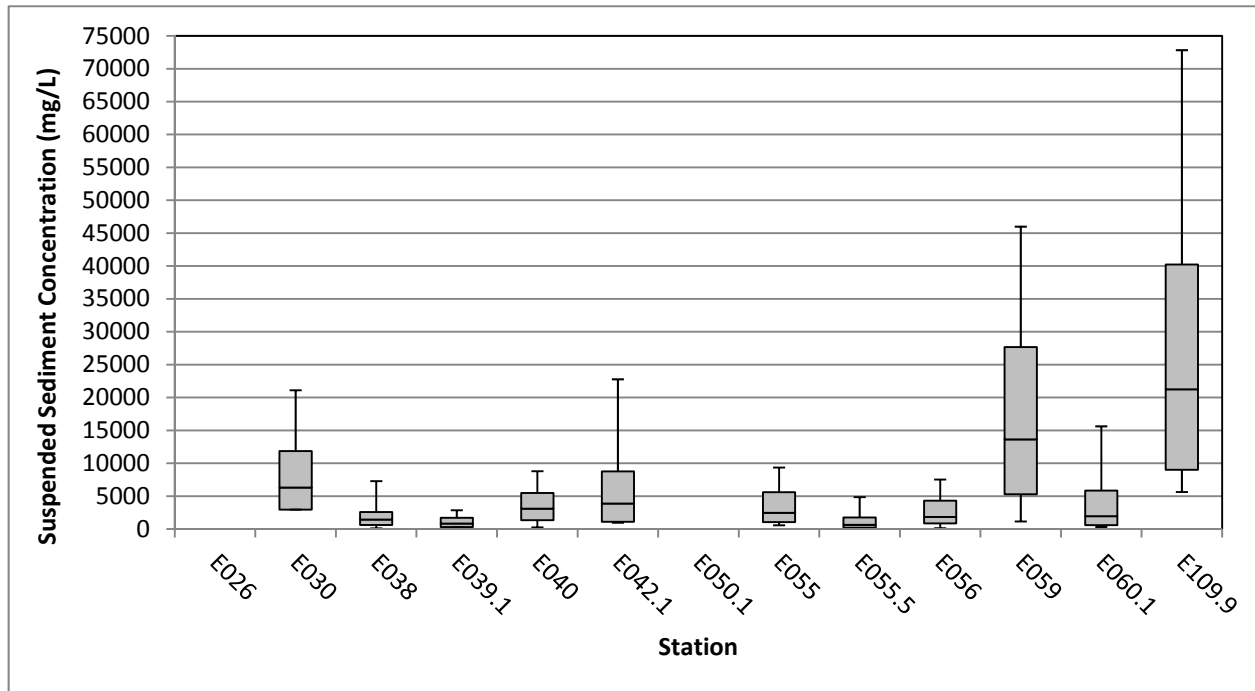


Figure 3.1-1 Box and whisker plot of suspended sediment concentrations for each station (no suspended sediment samples were collected at E026 or E050.1)

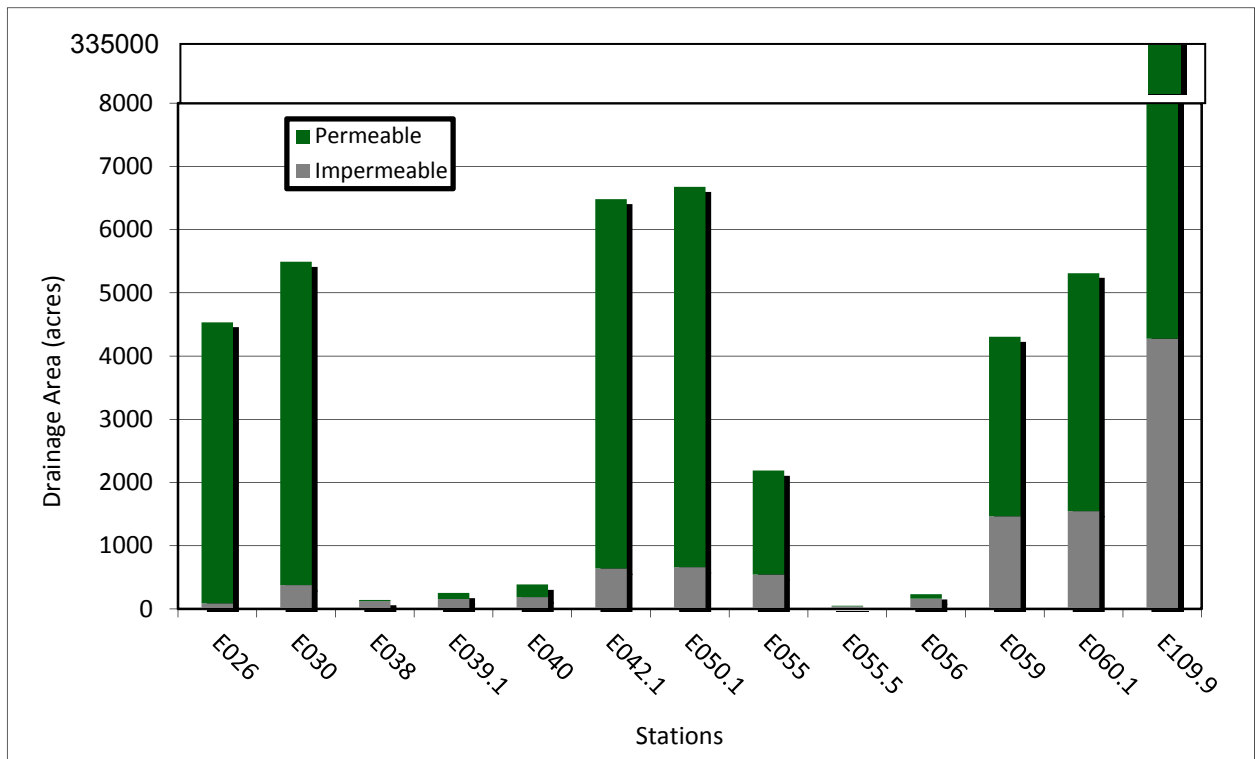


Figure 3.1-2 Cumulative drainage area and fraction of permeable/impermeable area for each station

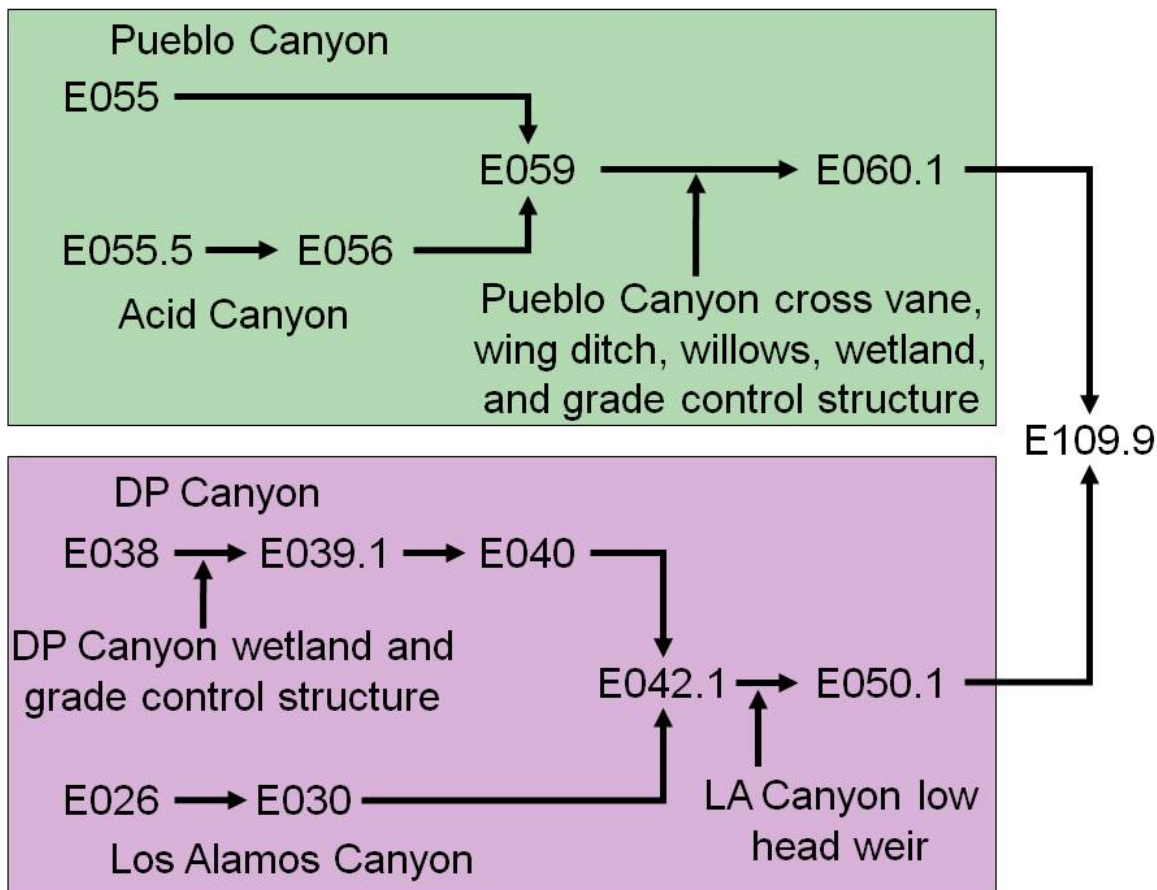


Figure 3.2-1 Flow diagram of gage stations and watershed mitigations in Los Alamos/DP and Pueblo/Acid canyons

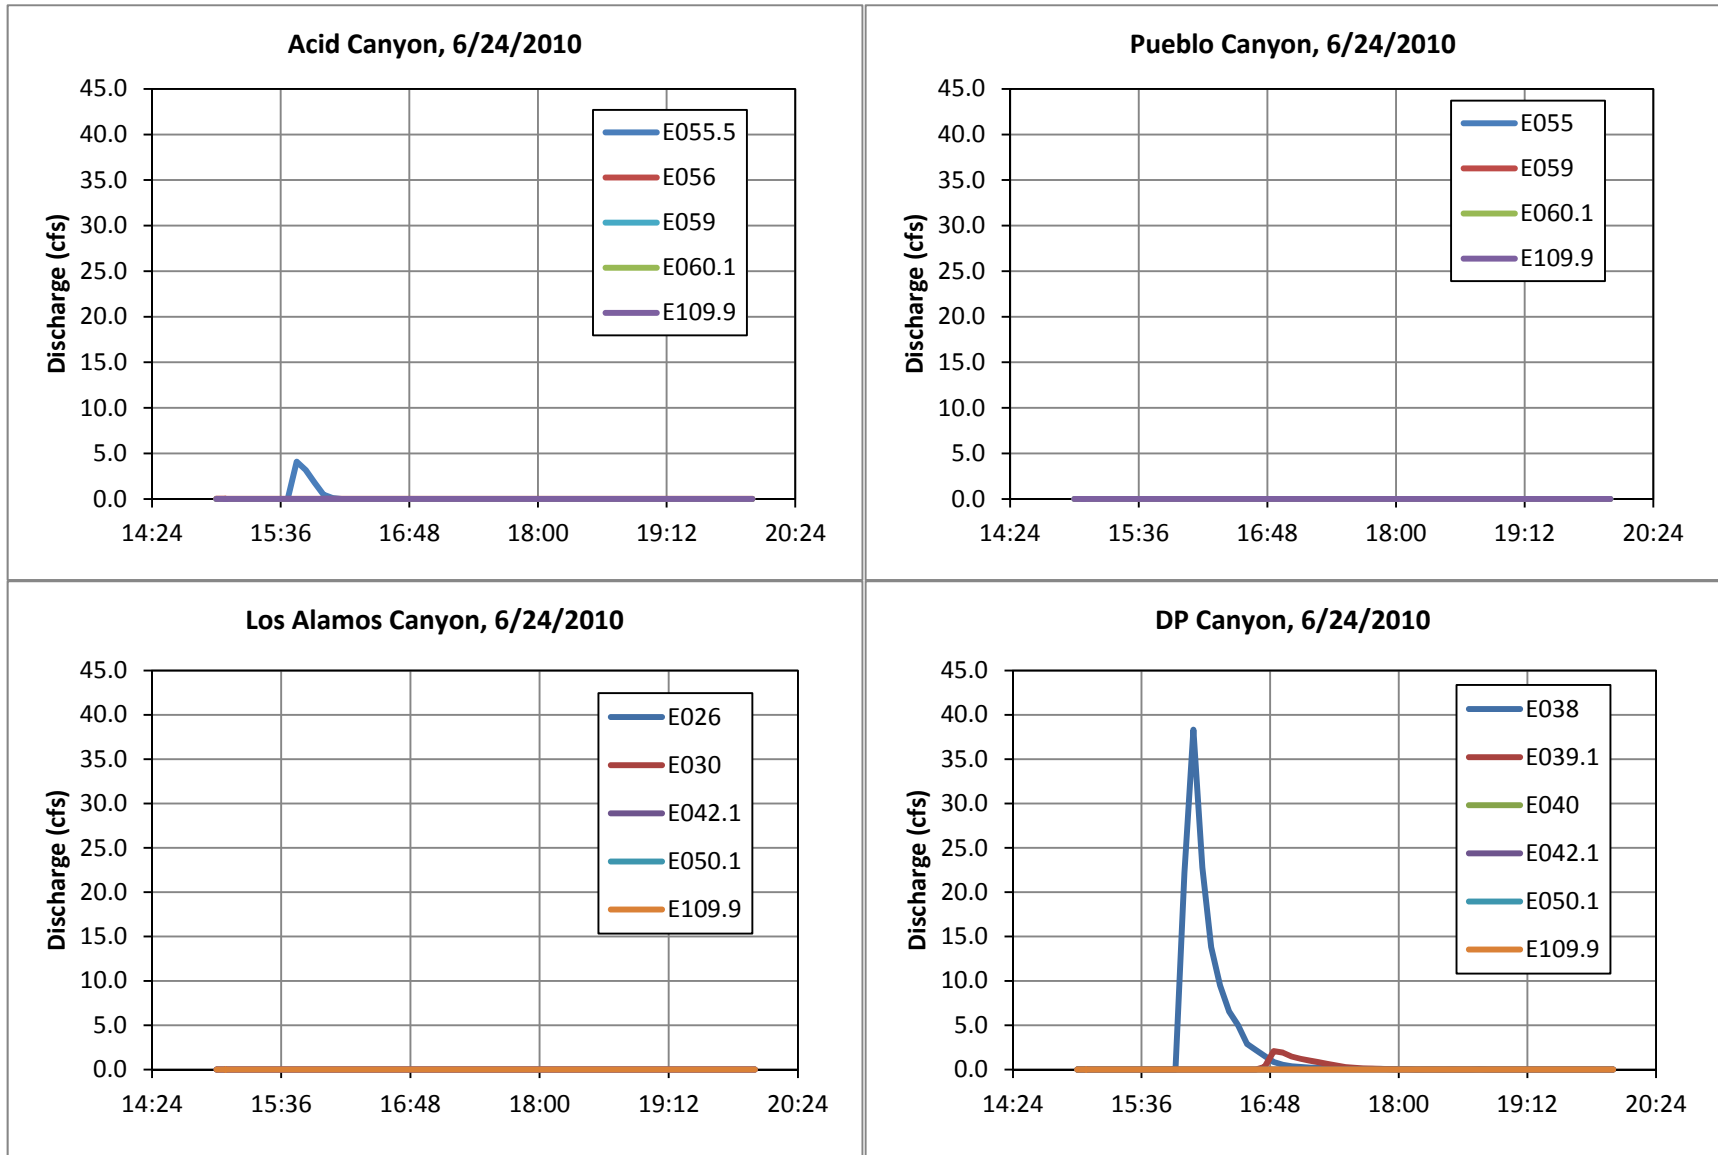


Figure 3.2-2 Hydrographs during each sampling event for each canyon from upstream to downstream reaches

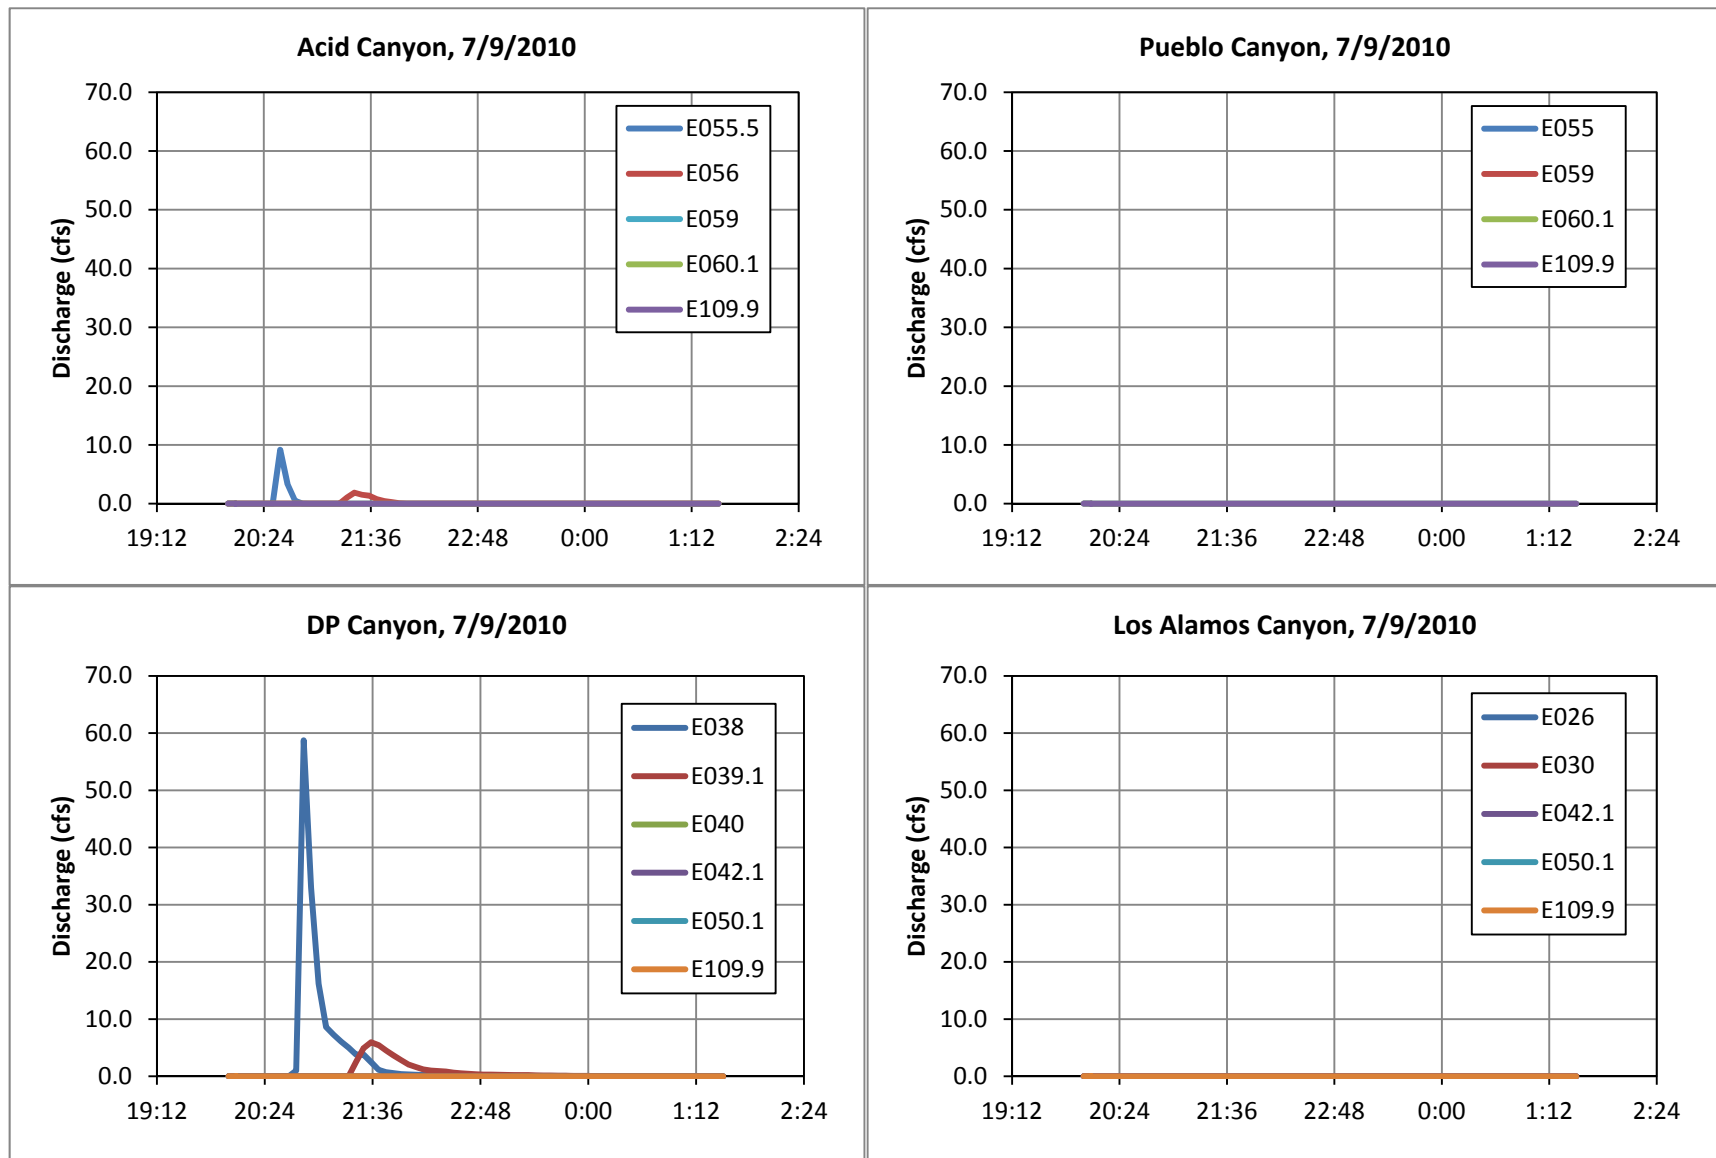


Figure 3.2-2 (continued) Hydrographs during each sampling event for each canyon from upstream to downstream reaches

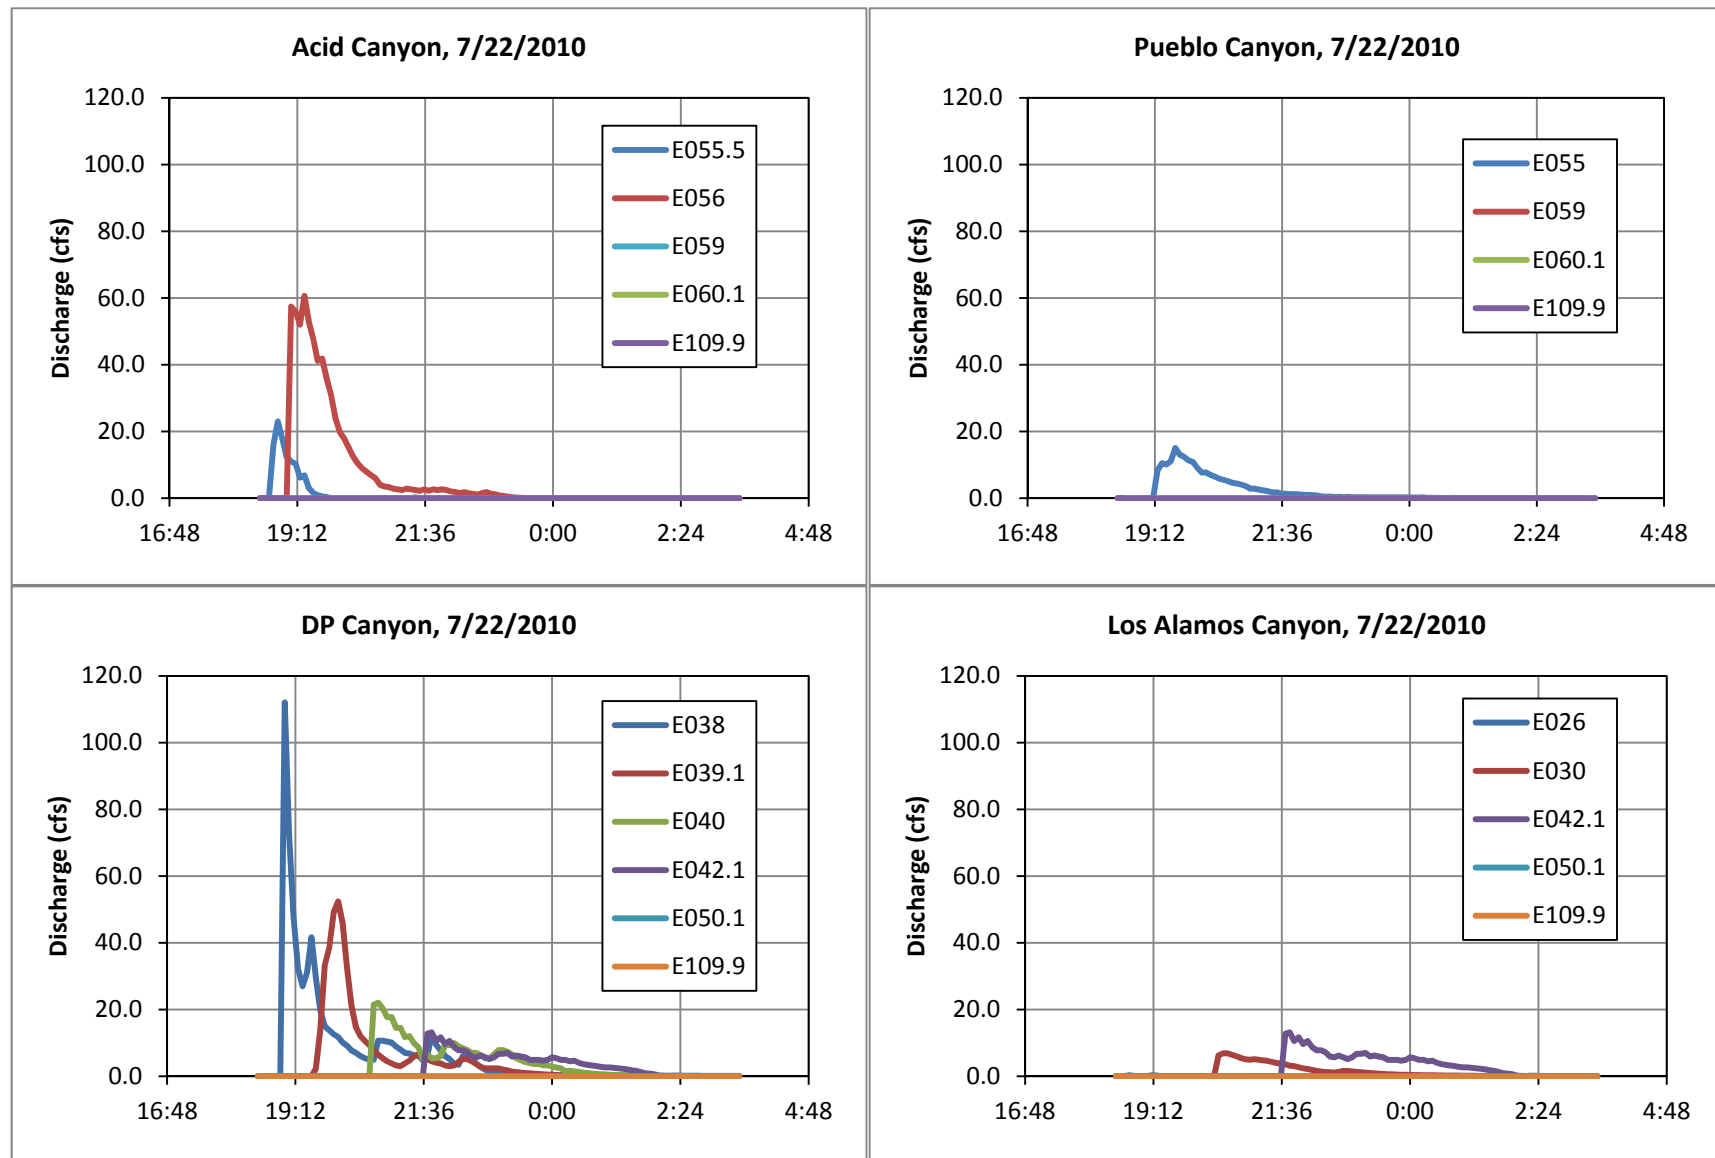


Figure 3.2-2 (continued) Hydrographs during each sampling event for each canyon from upstream to downstream reaches

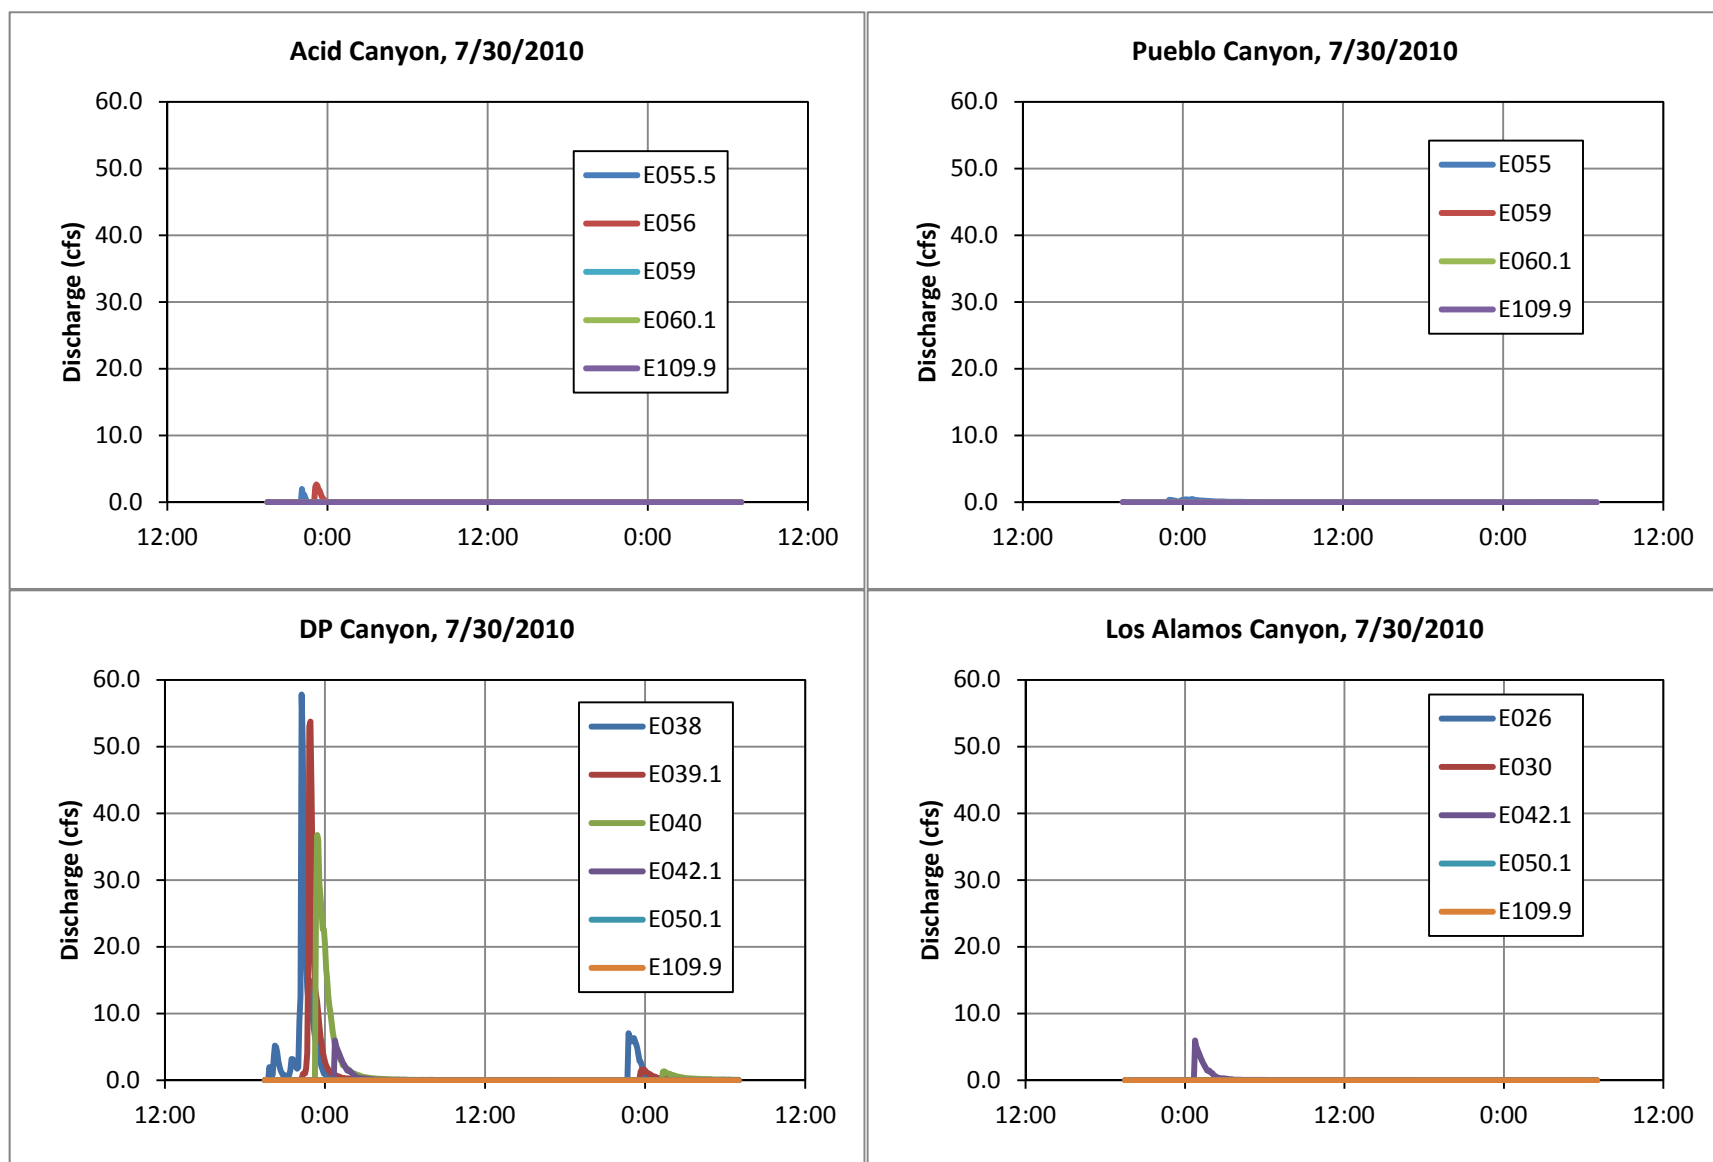


Figure 3.2-2 (continued) Hydrographs during each sampling event for each canyon from upstream to downstream reaches

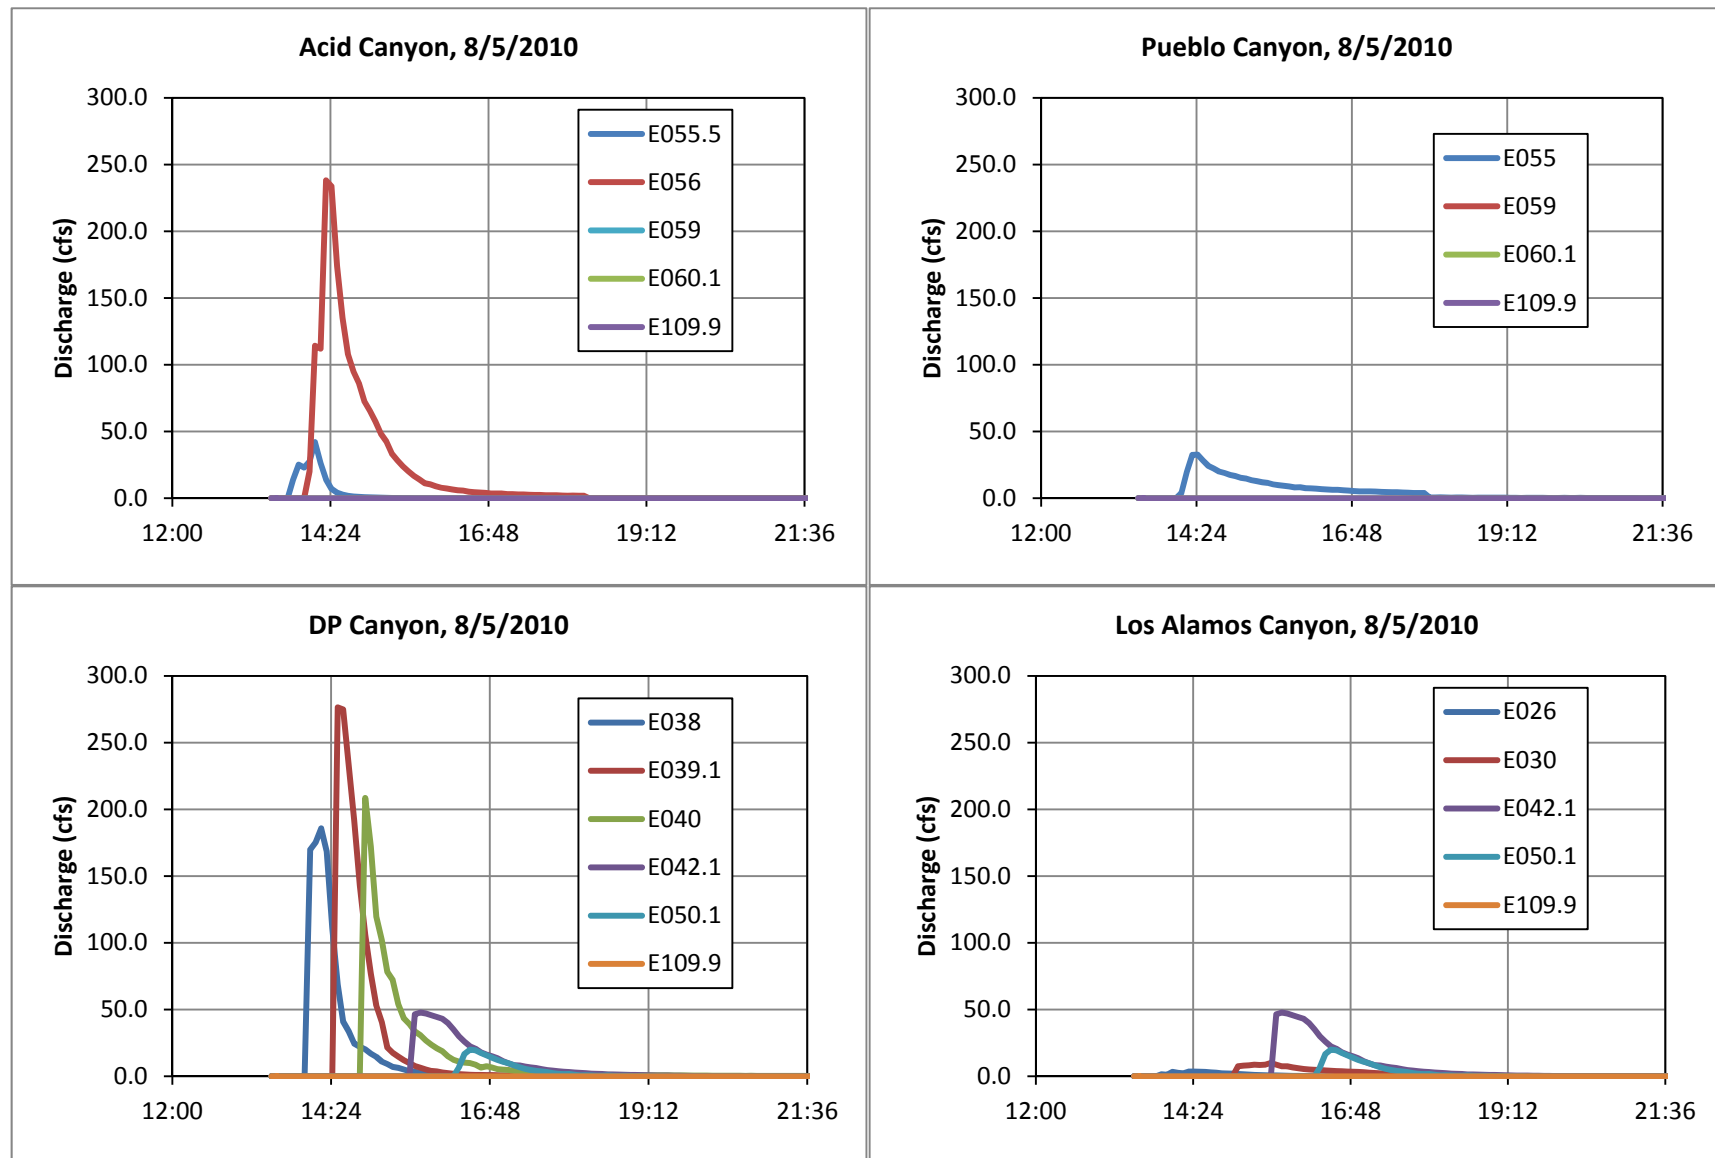


Figure 3.2-2 (continued) Hydrographs during each sampling event for each canyon from upstream to downstream reaches

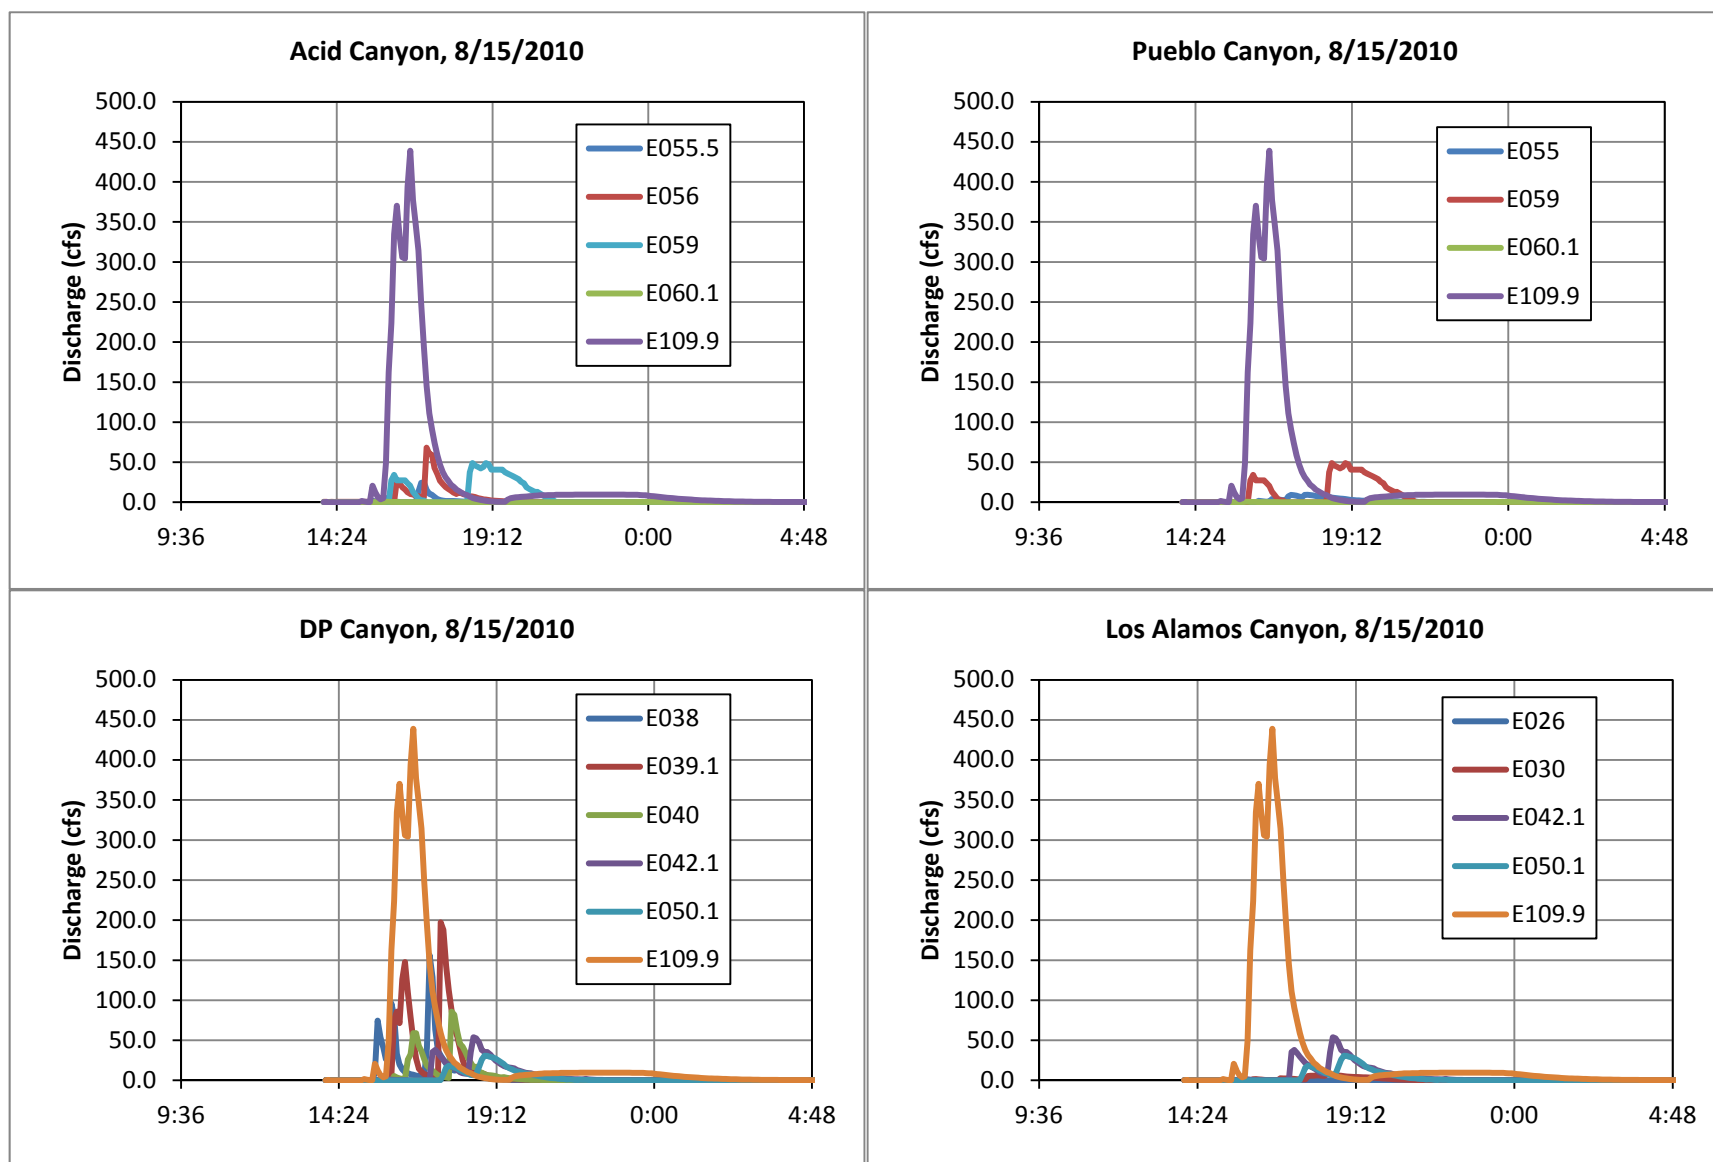


Figure 3.2-2 (continued) Hydrographs during each sampling event for each canyon from upstream to downstream reaches


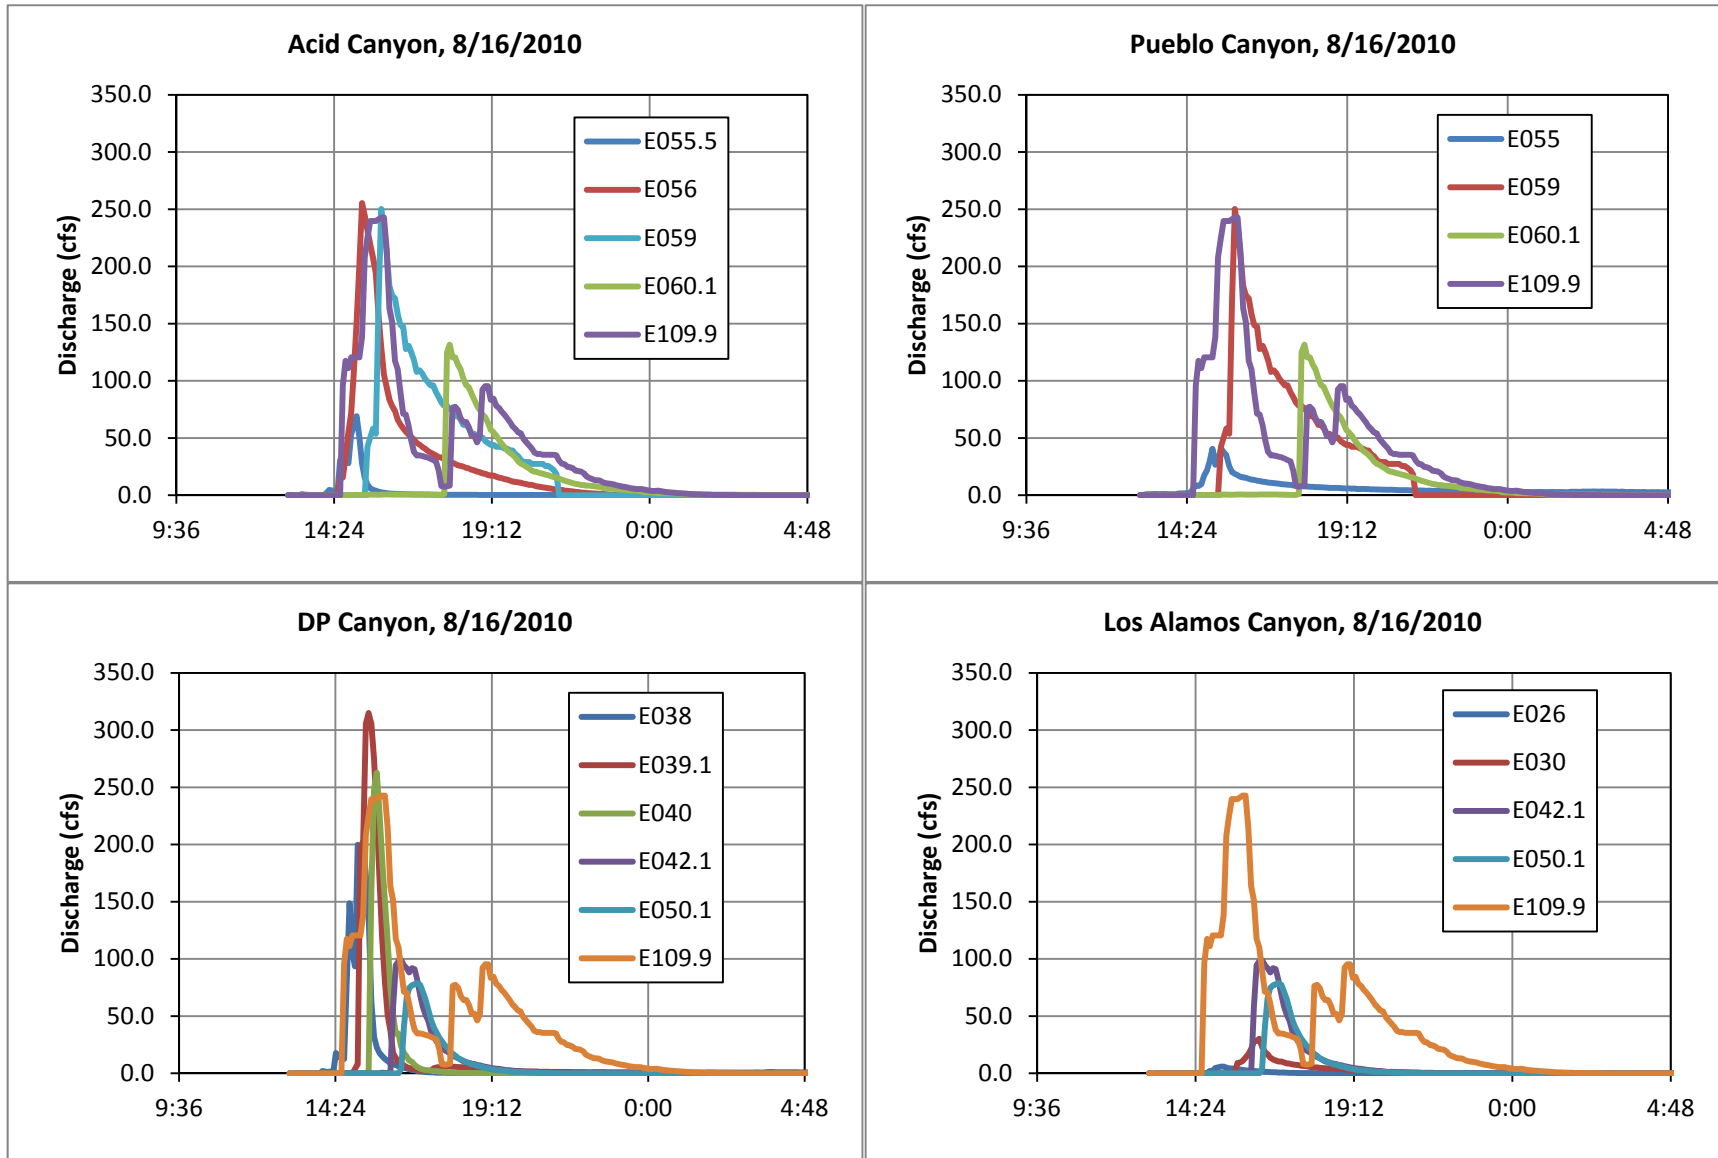


Figure 3.2-2 (continued) Hydrographs during each sampling event for each canyon from upstream to downstream reaches

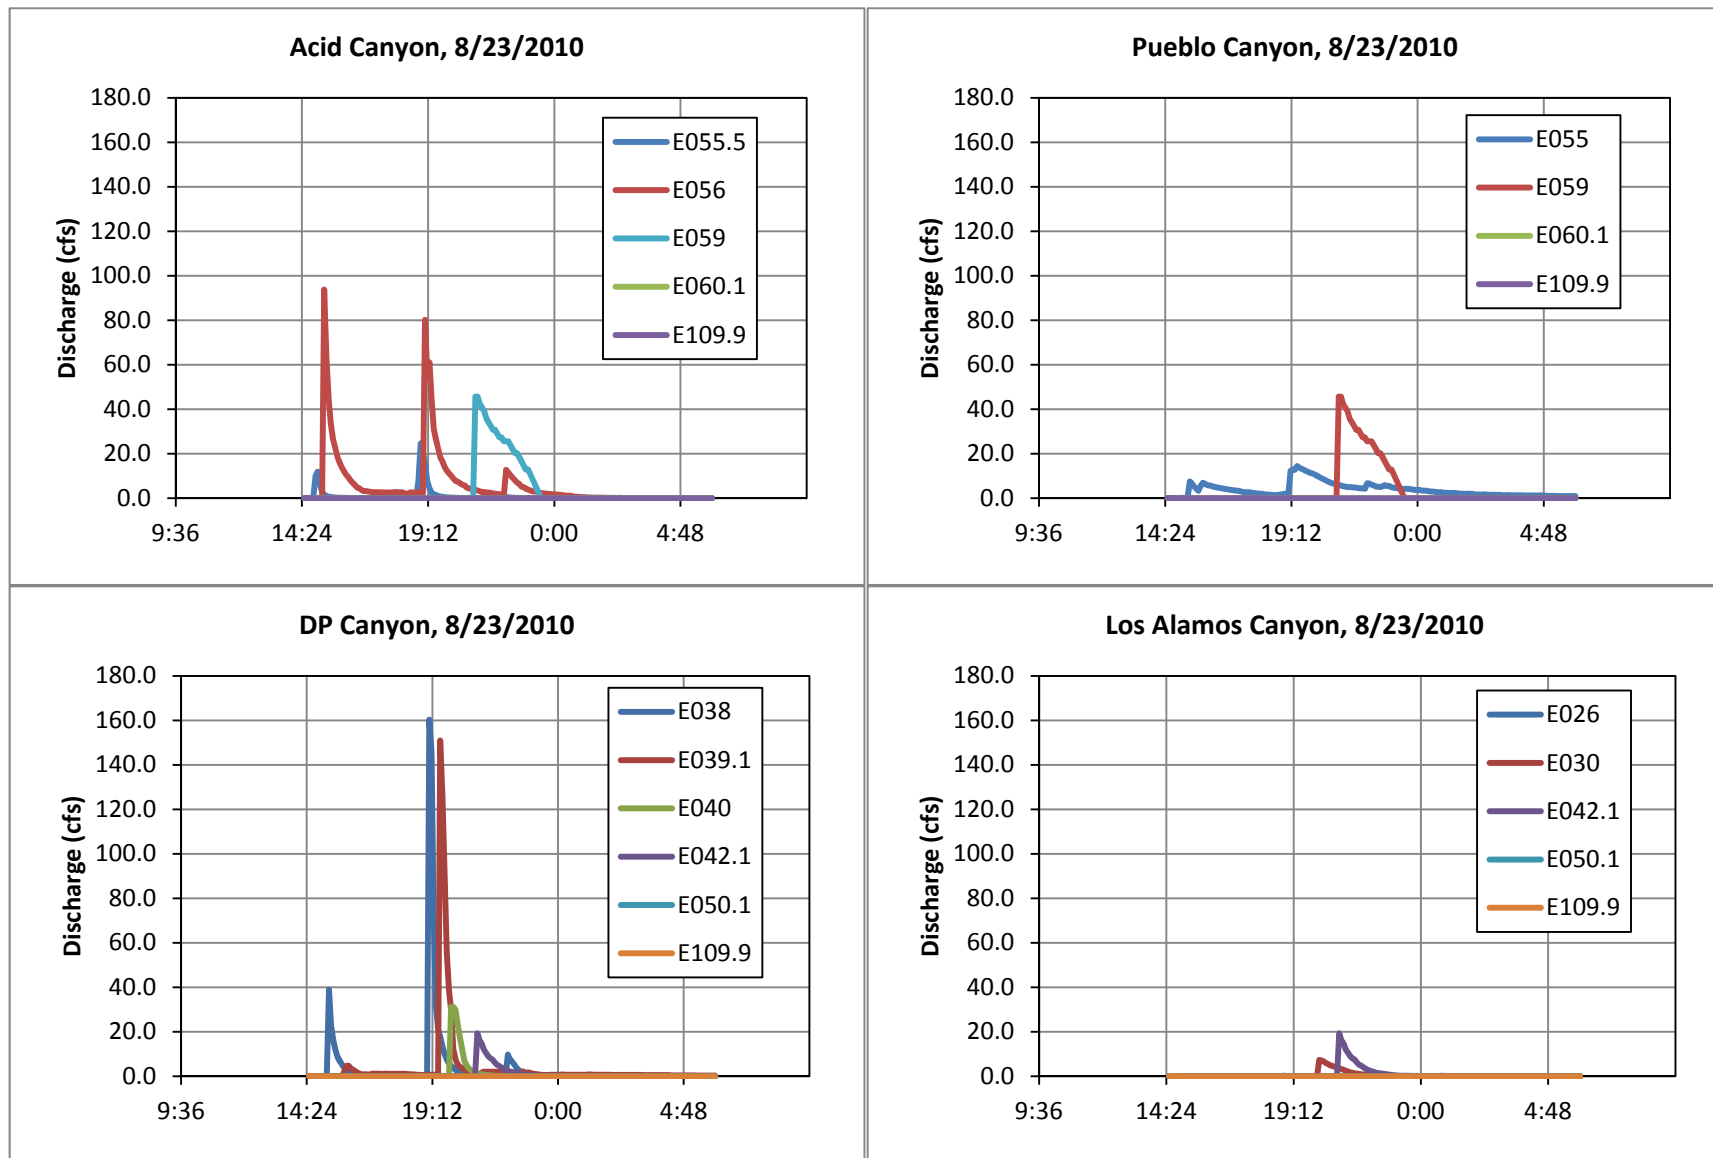

Note: E109.9 was not functioning on August 23.

Figure 3.2-2 (continued) Hydrographs during each sampling event for each canyon from upstream to downstream reaches

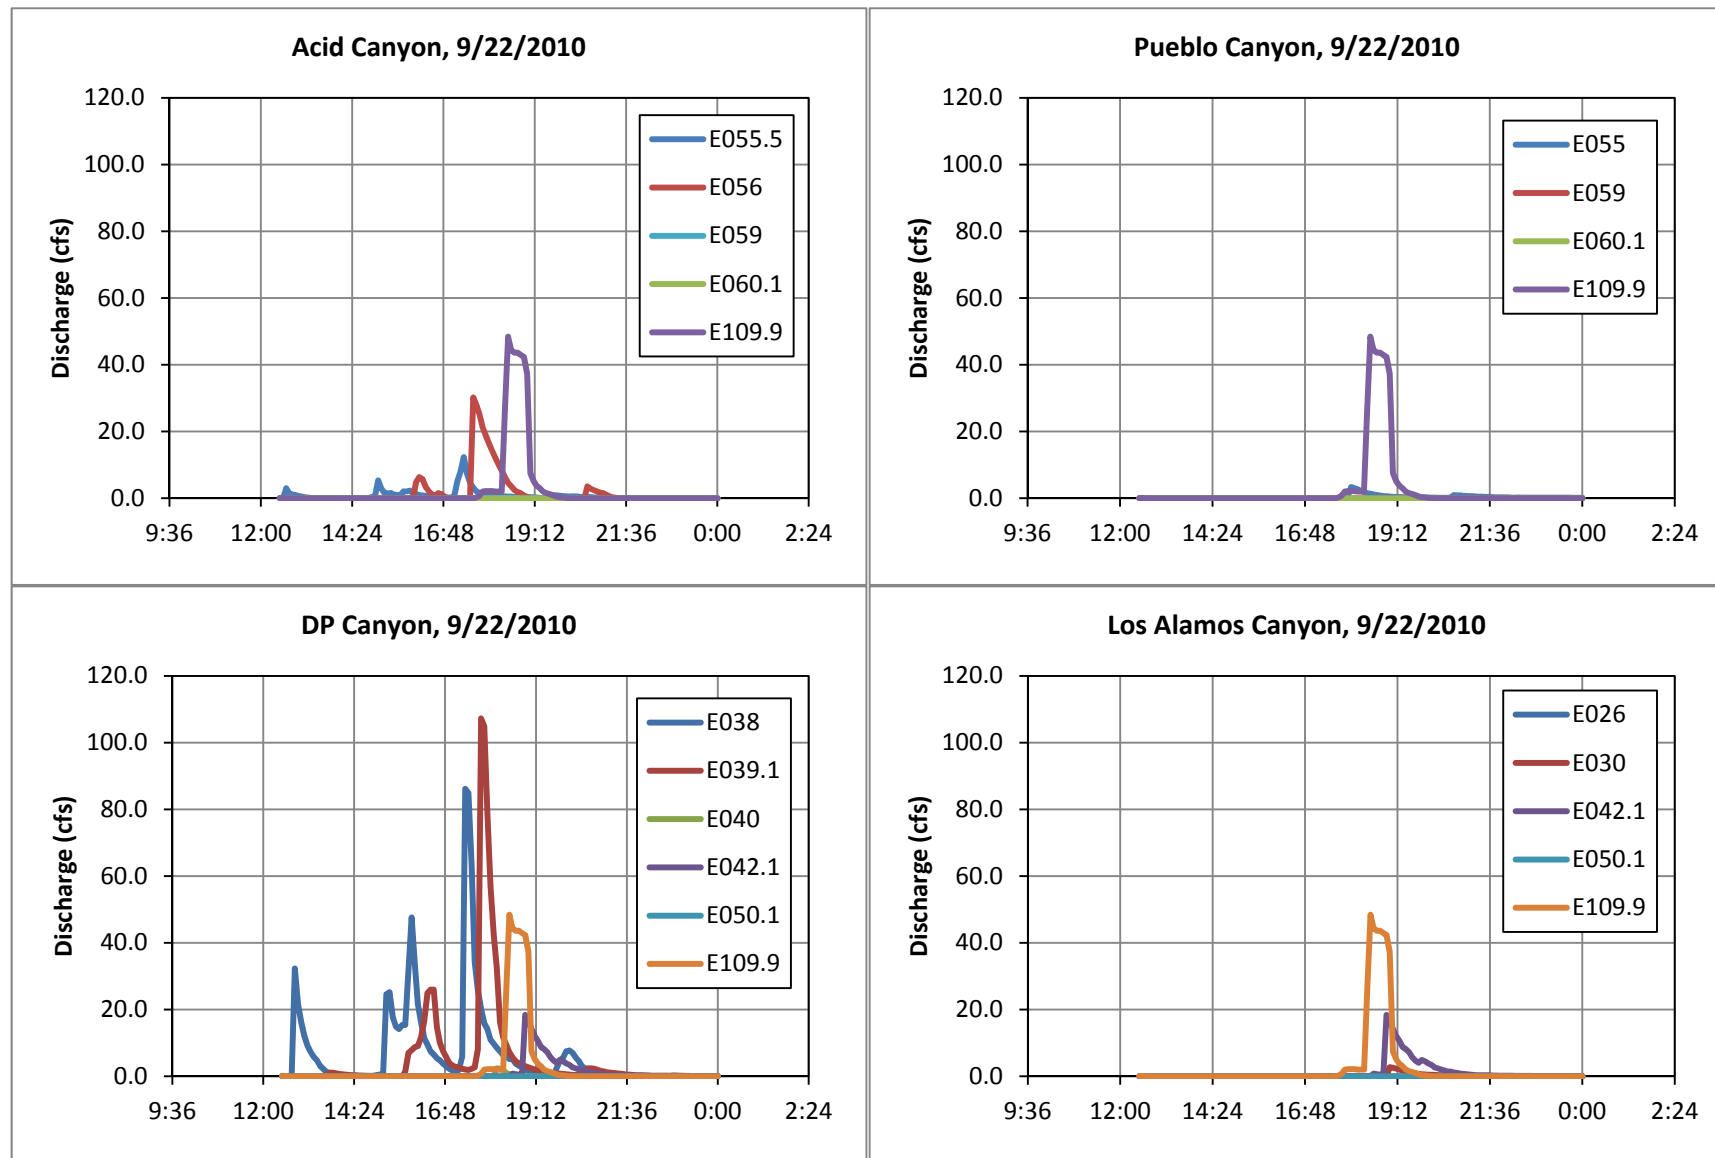


Figure 3.2-2 (continued) Hydrographs during each sampling event for each canyon from upstream to downstream reaches

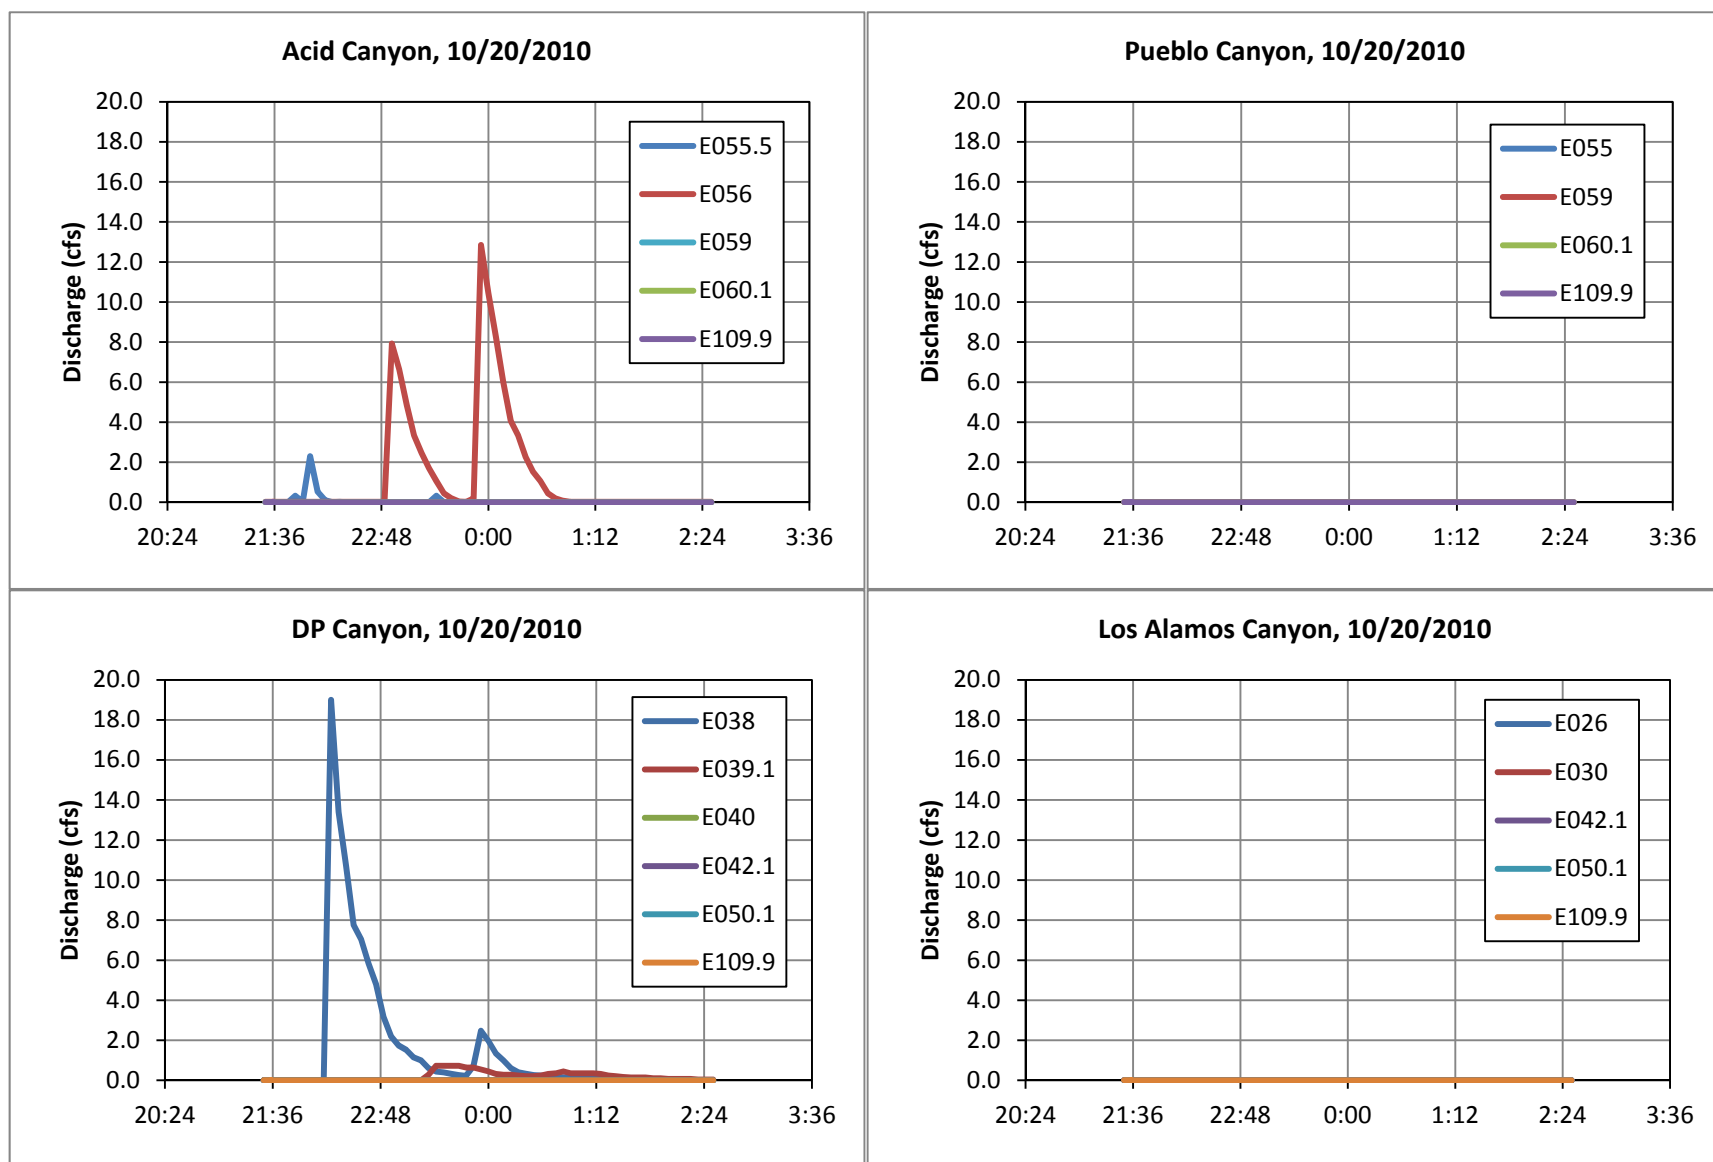


Figure 3.2-2 (continued) Hydrographs during each sampling event for each canyon from upstream to downstream reaches

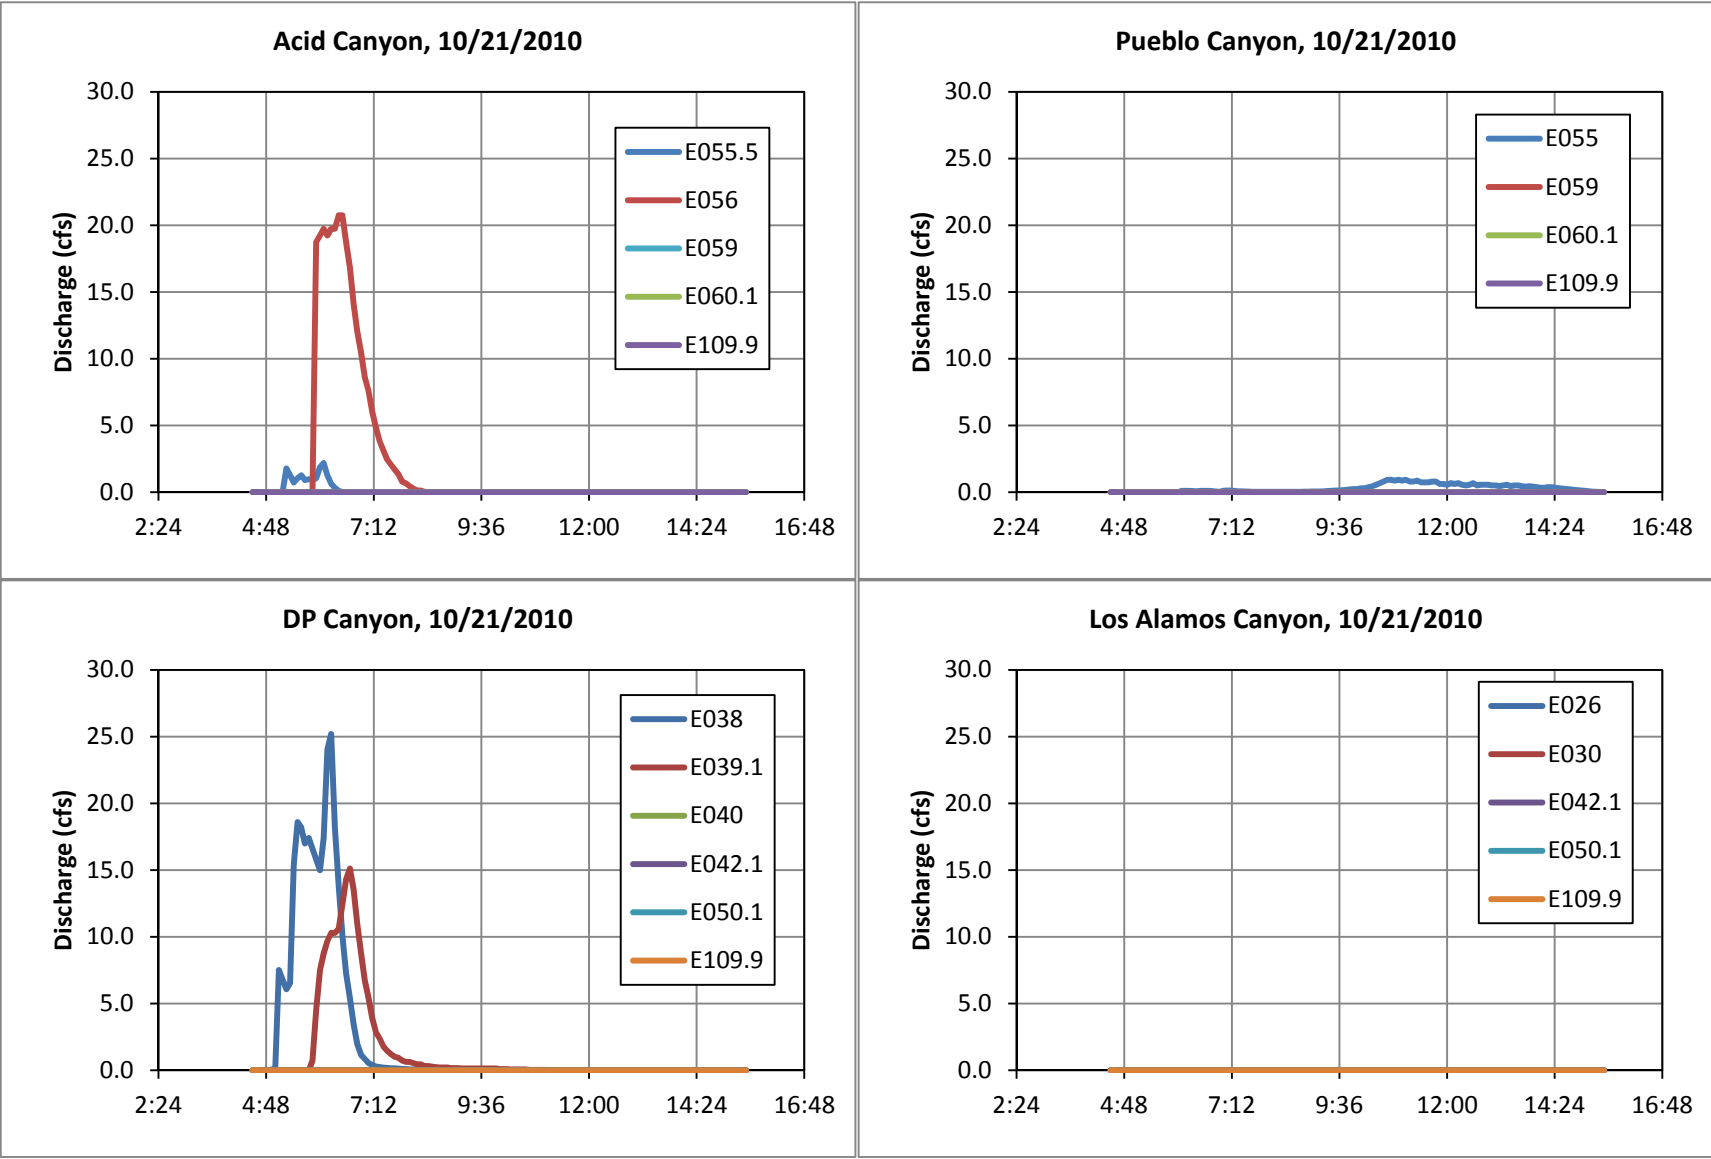


Figure 3.2-2 (continued) Hydrographs during each sampling event for each canyon from upstream to downstream reaches

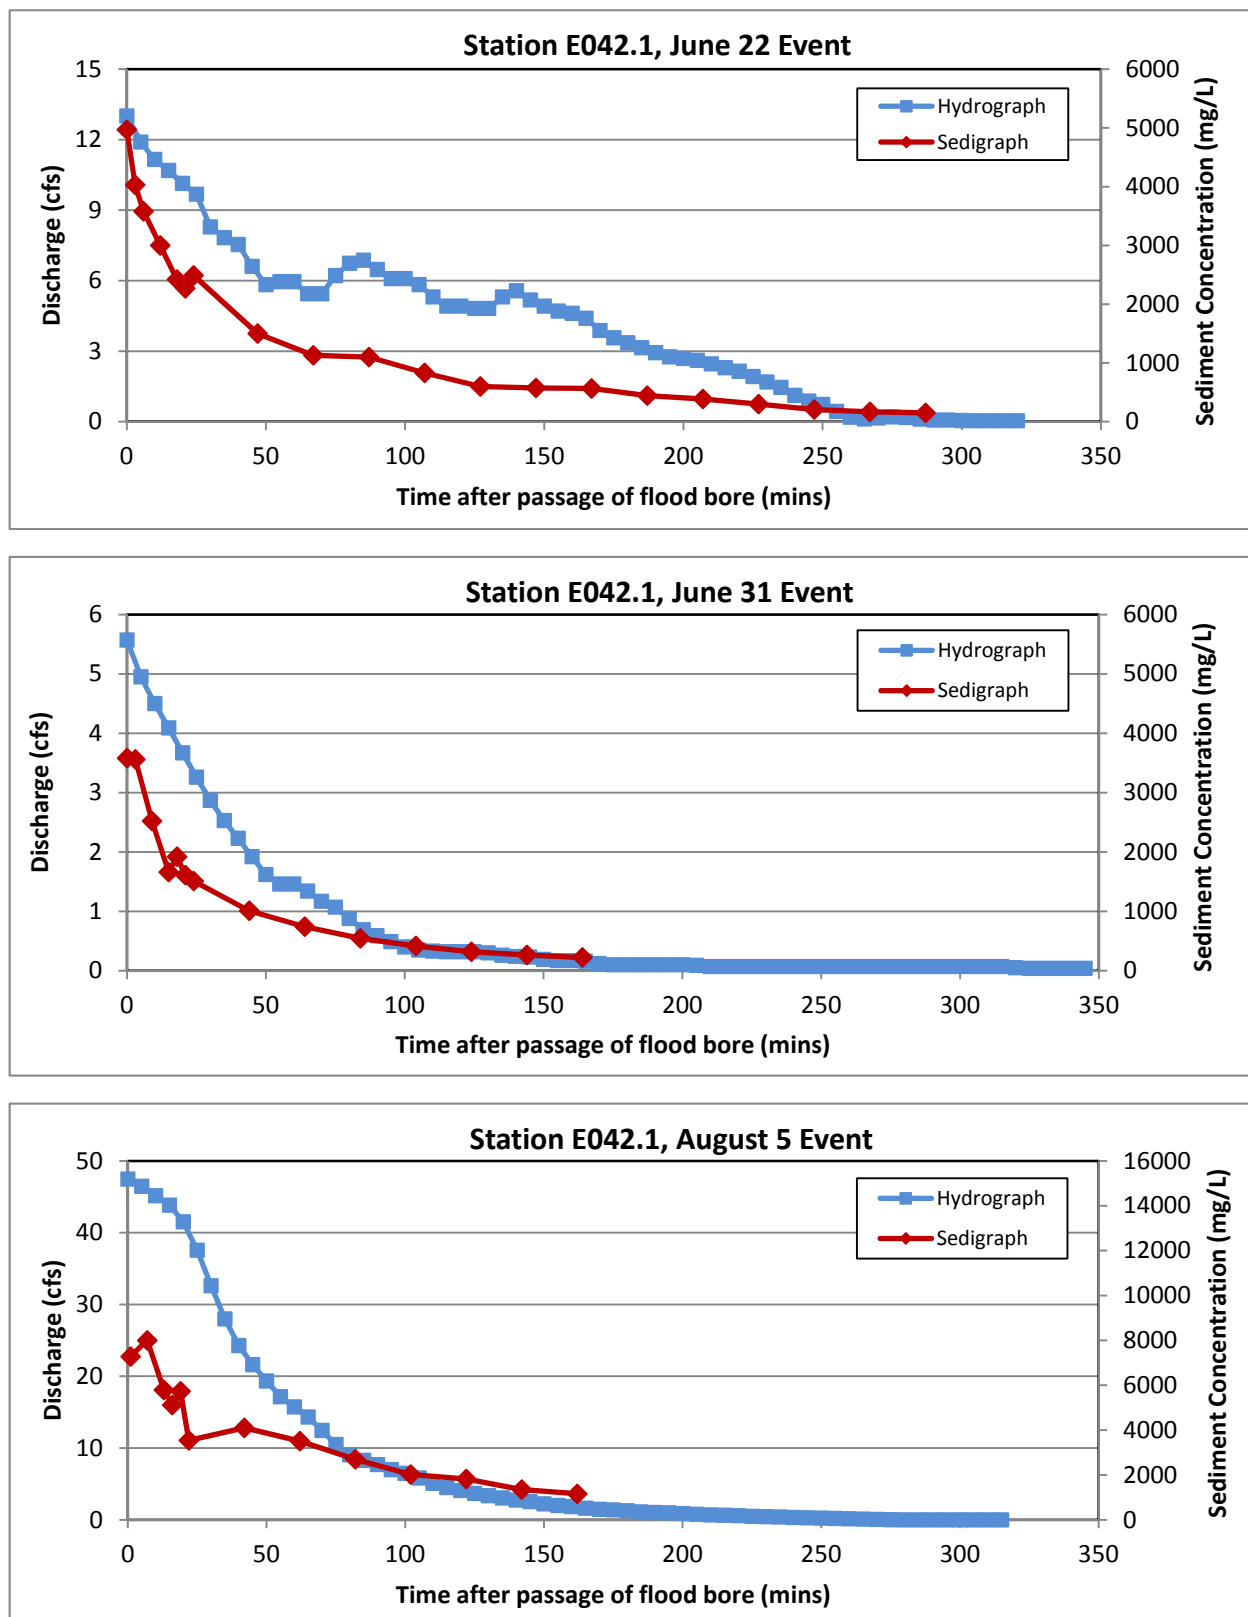


Figure 3.2-3 Discharge and suspended sediment concentration for each station sampled throughout the storm event

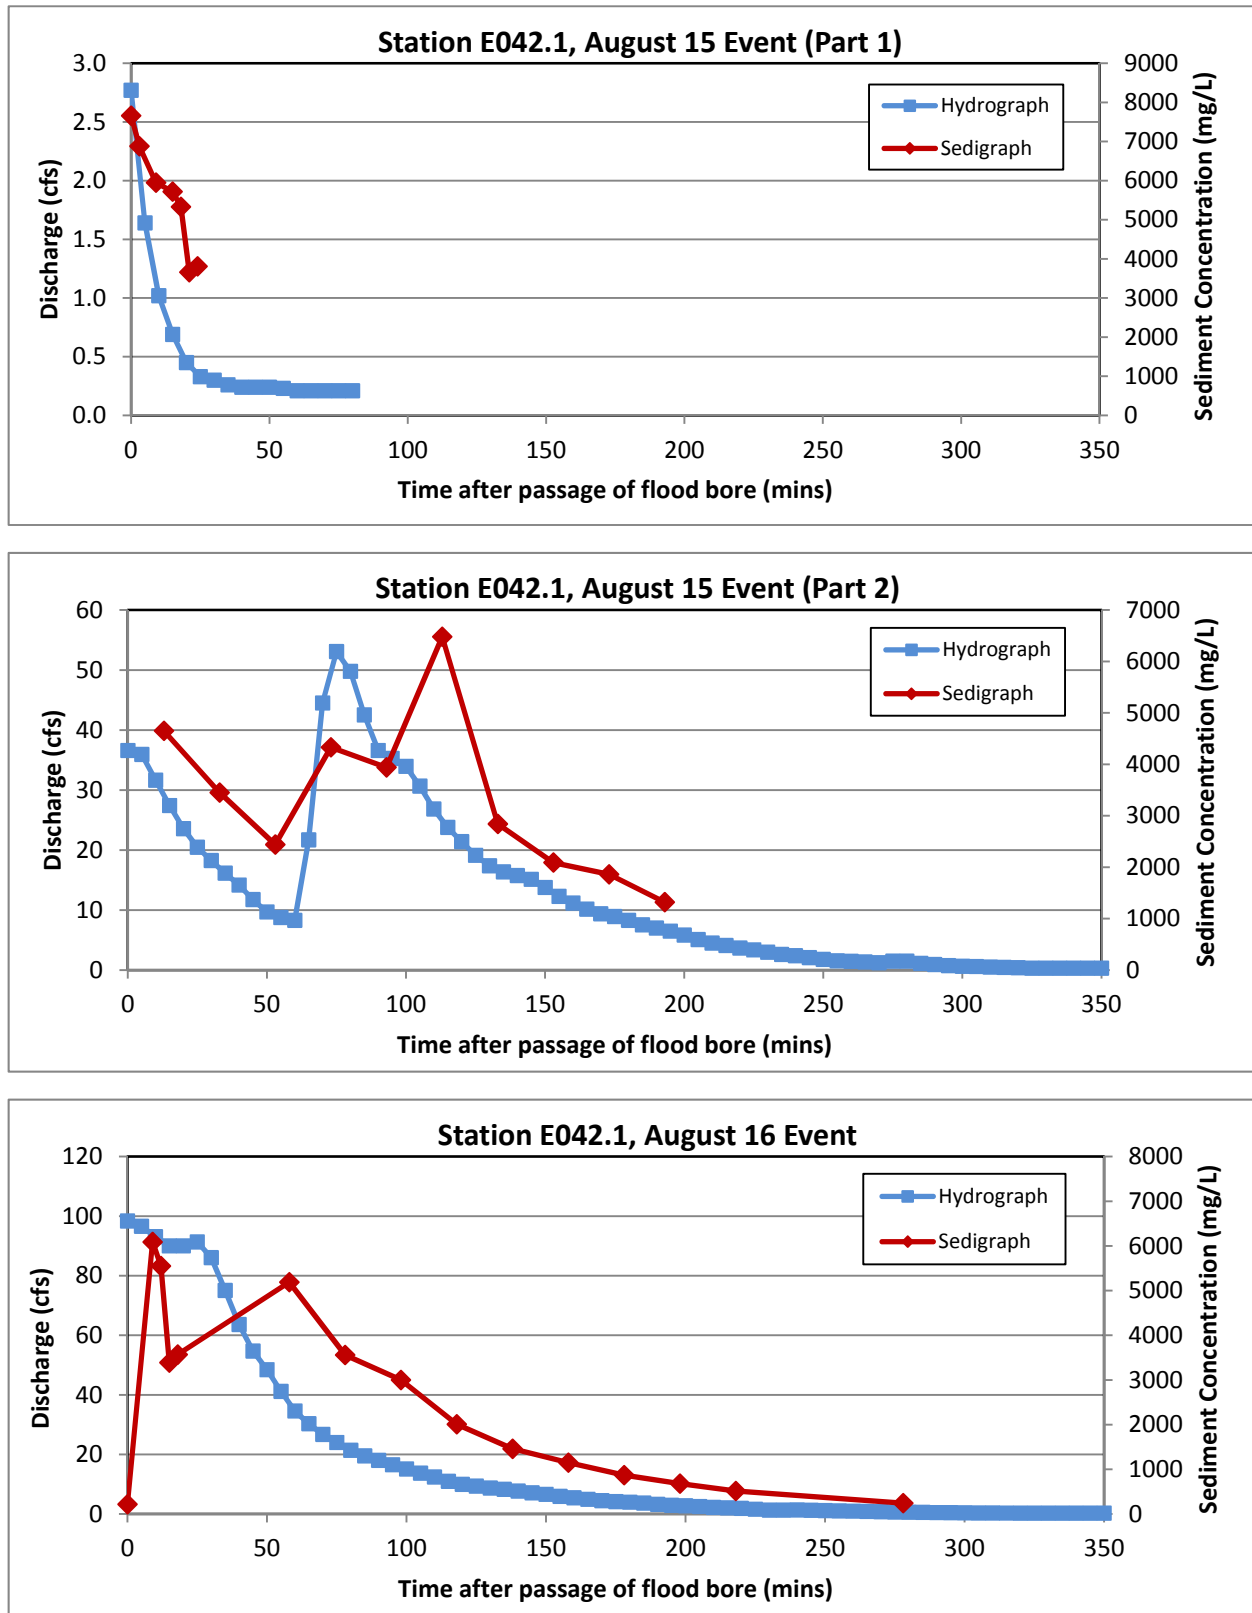


Figure 3.2-3 (continued) Discharge and suspended sediment concentration for each station sampled throughout the storm event

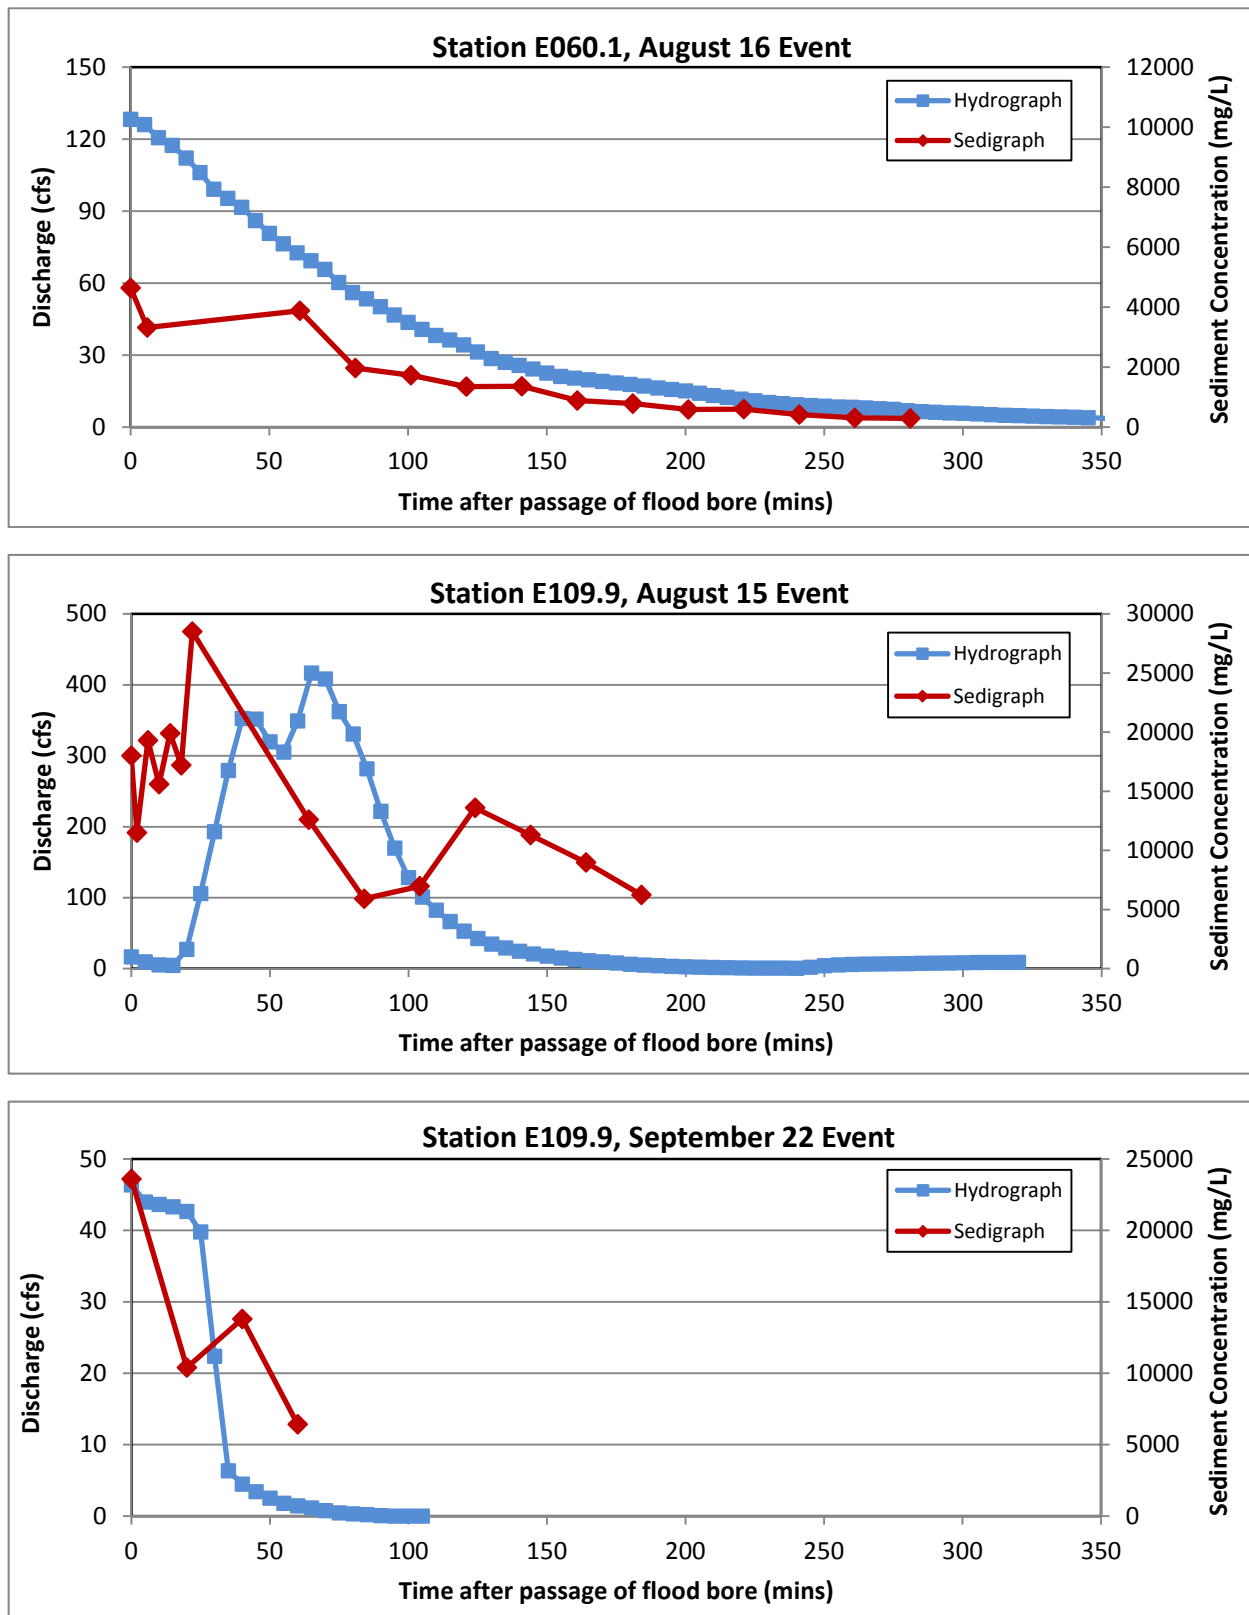


Figure 3.2-3 (continued) Discharge and suspended sediment concentration for each station sampled throughout the storm event

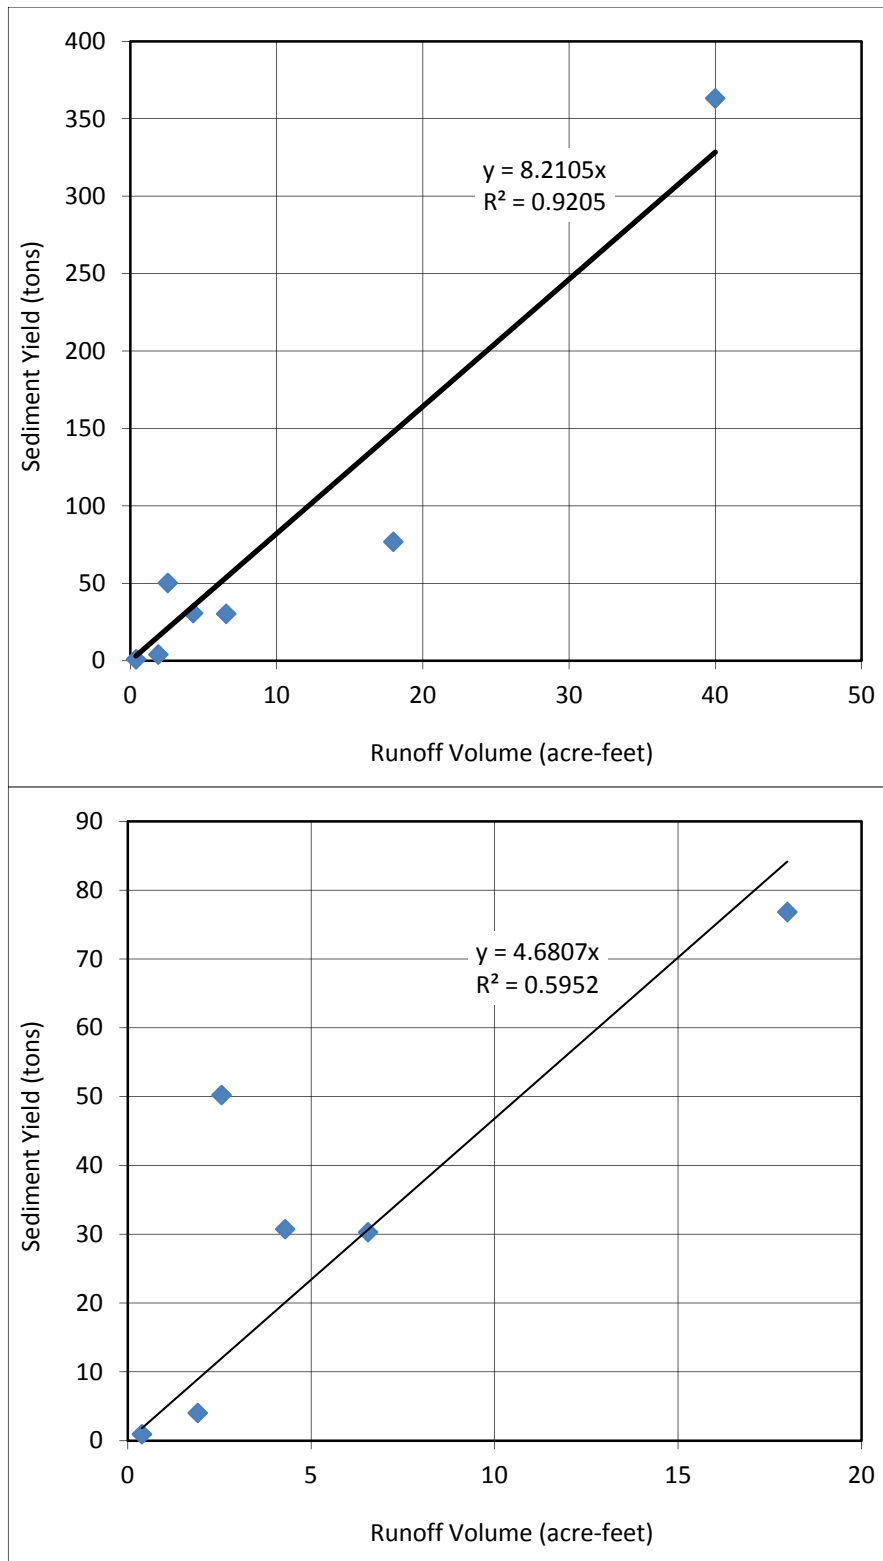


Figure 3.2-4 Relationship between sediment yield and runoff volume with (top) and without (bottom) August 15 storm at E109.9

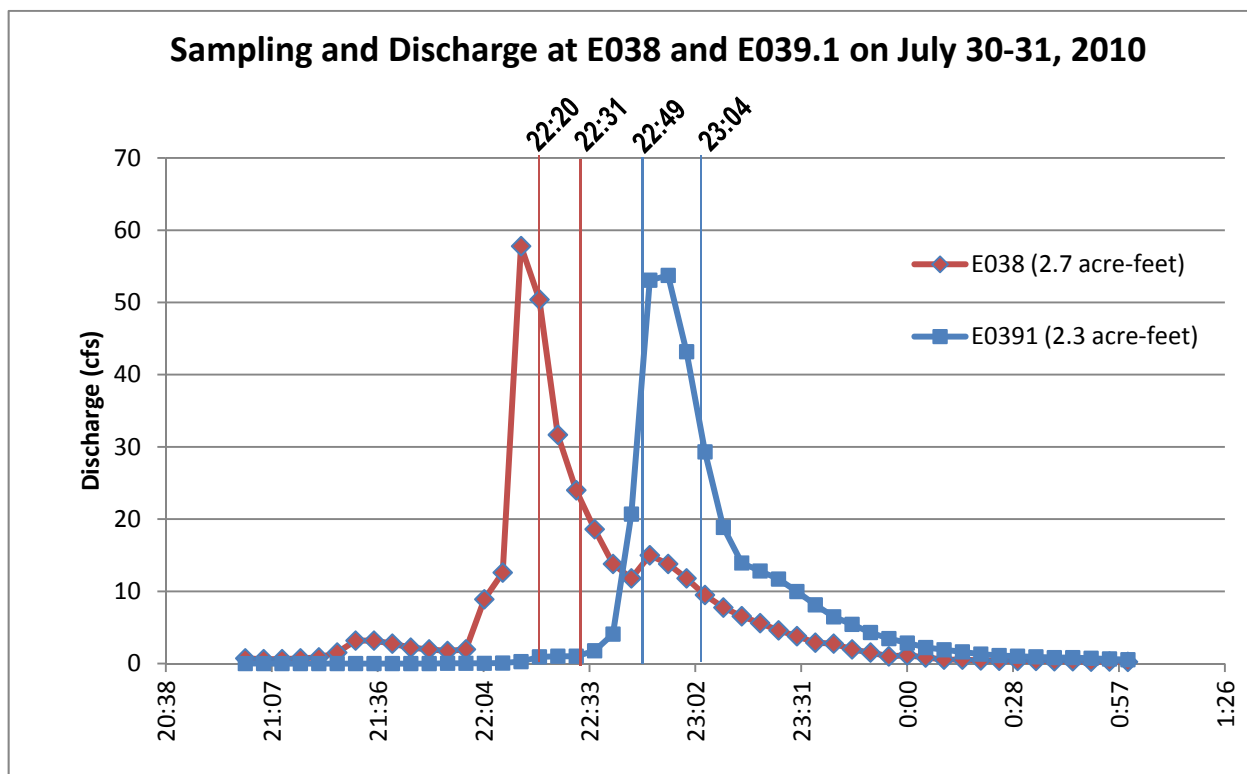
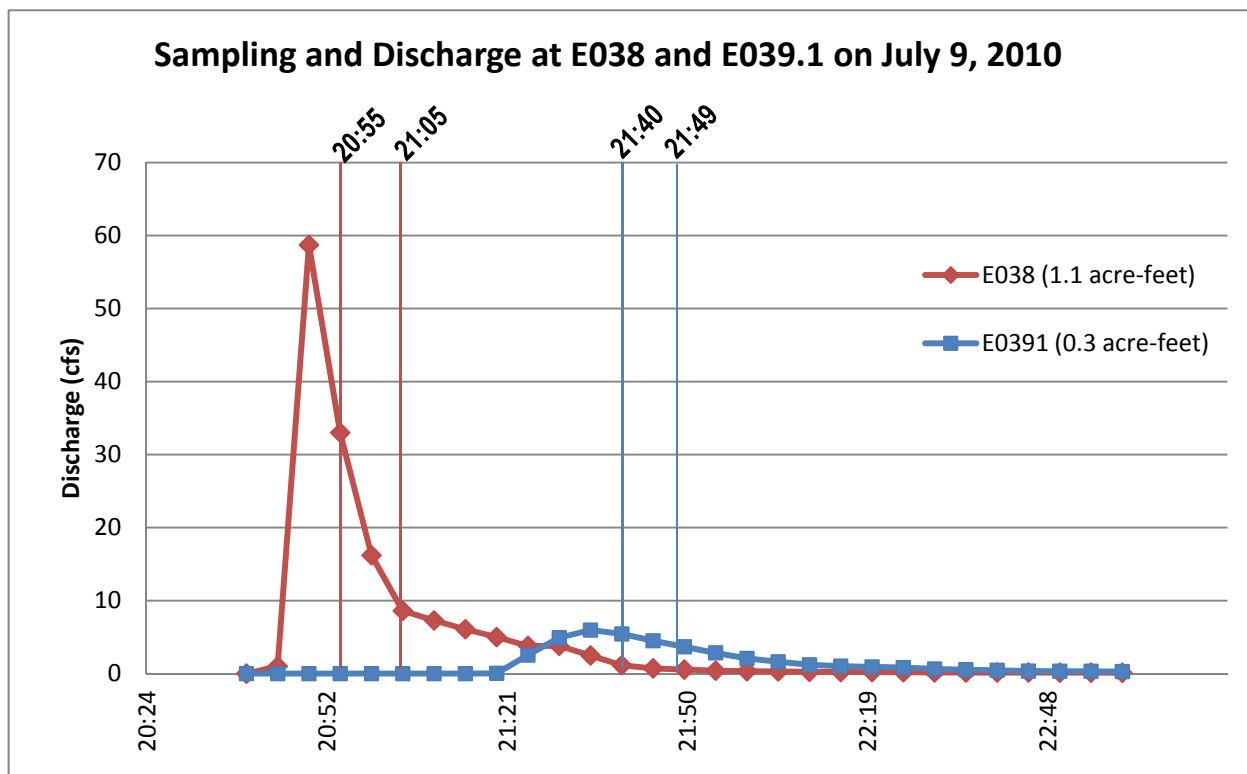


Figure 3.3-1 Discharge at E038 and E039.1 in DP Canyon on July 9 and July 30-31

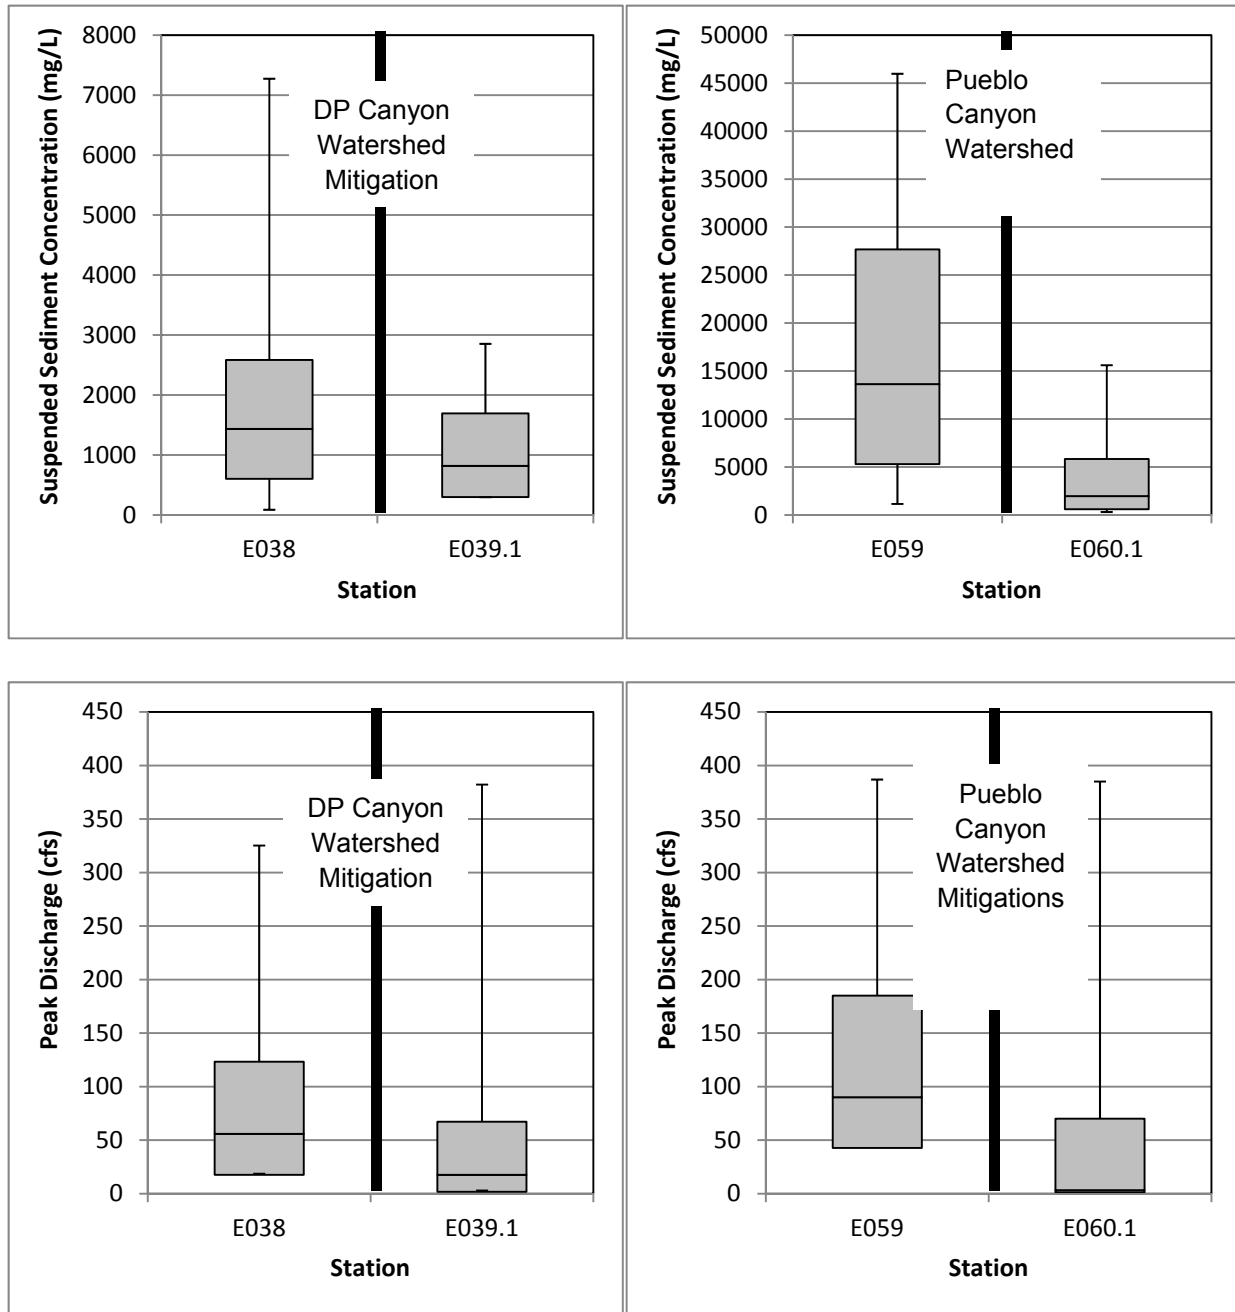


Figure 3.3-2 Box and whisker plot of suspended sediment concentrations (top) and peak discharge (bottom) upstream and downstream of the DP Canyon Watershed Mitigation (left) and Pueblo Canyon Watershed Mitigations (right)

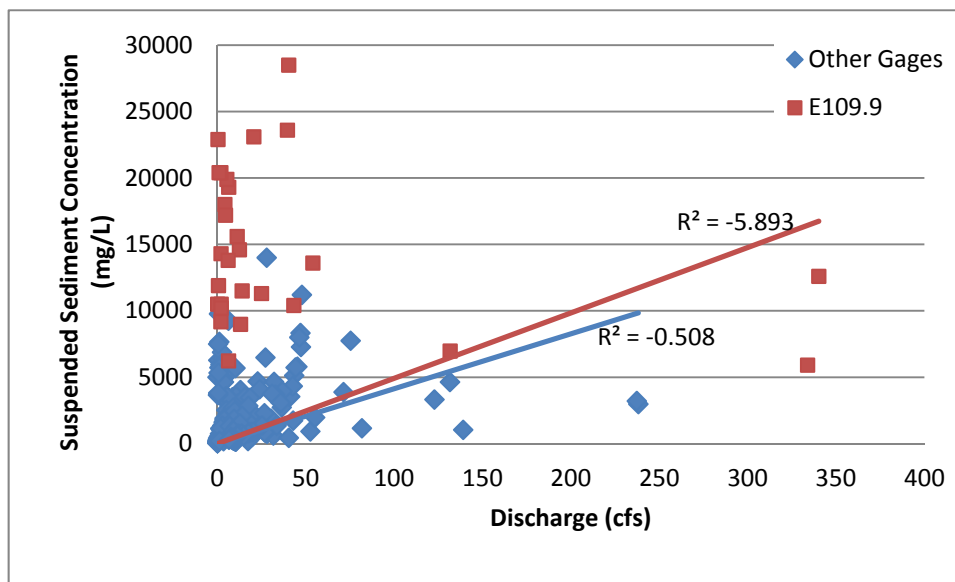


Figure 4.4-1 Relationship of suspended sediment to discharge within the LA/P Watershed

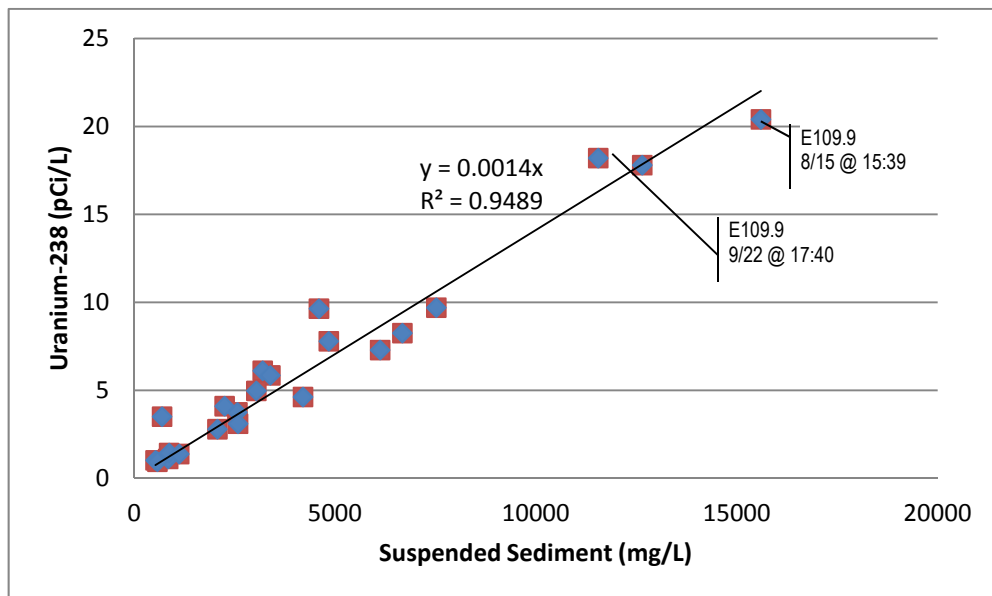


Figure 4.4-2 Relationship of uranium-238 to suspended sediment within the LA/P Watershed

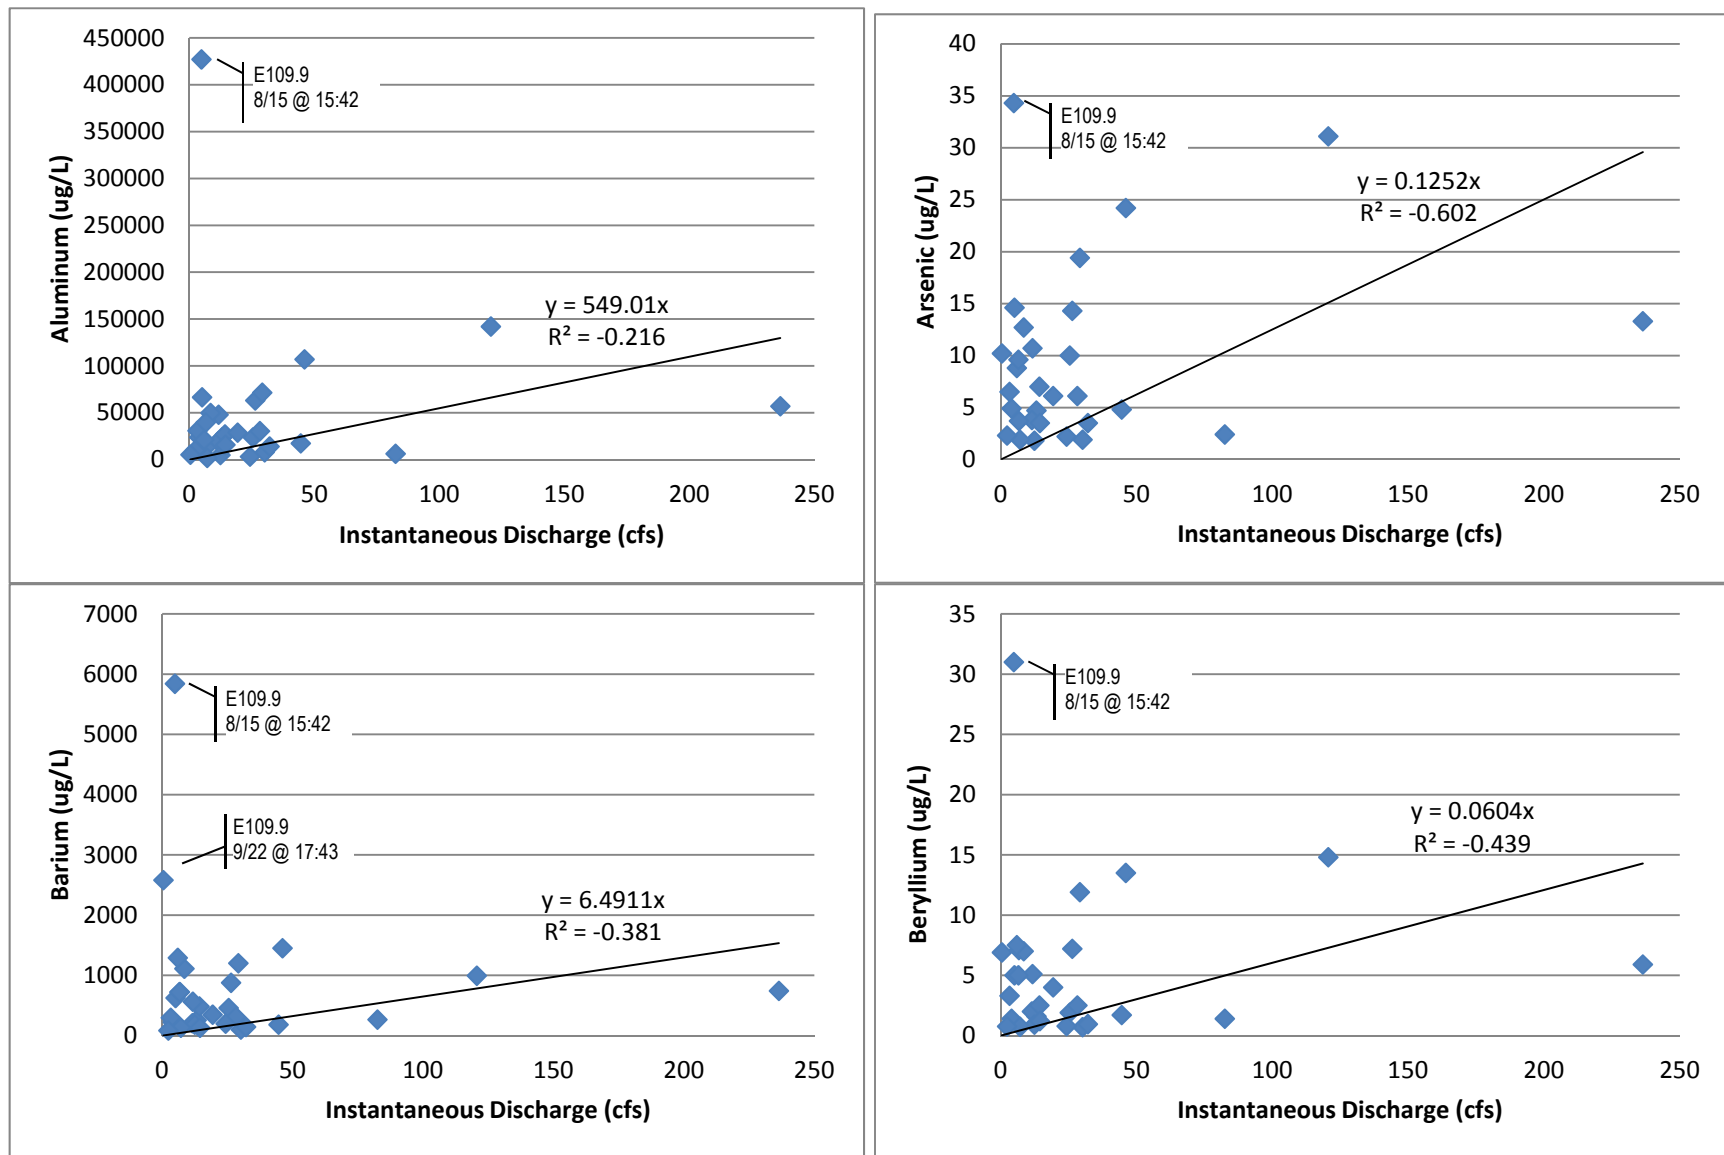


Figure 4.4-3 Relationship of instantaneous discharge to detected constituents in stormwater within the LA/P Watershed

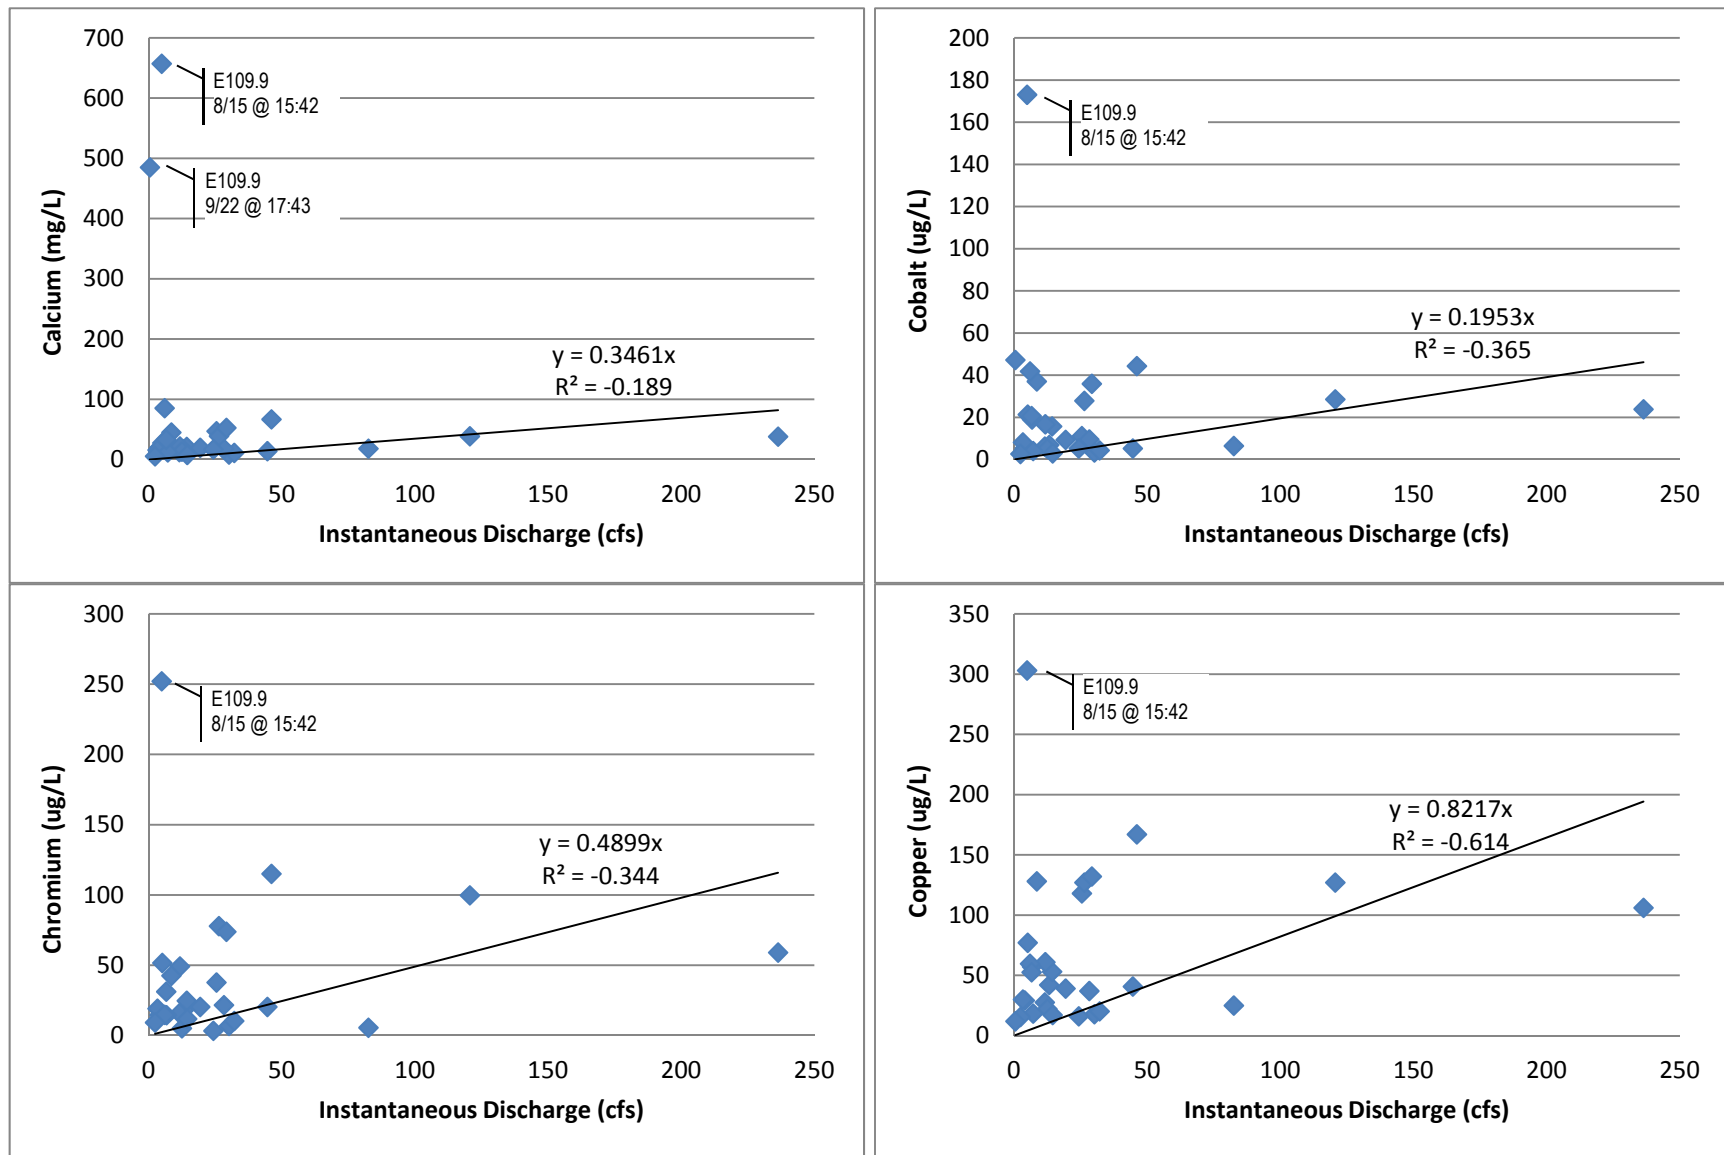


Figure 4.4-3 (continued) Relationship of instantaneous discharge to detected constituents in stormwater within the LA/P Watershed

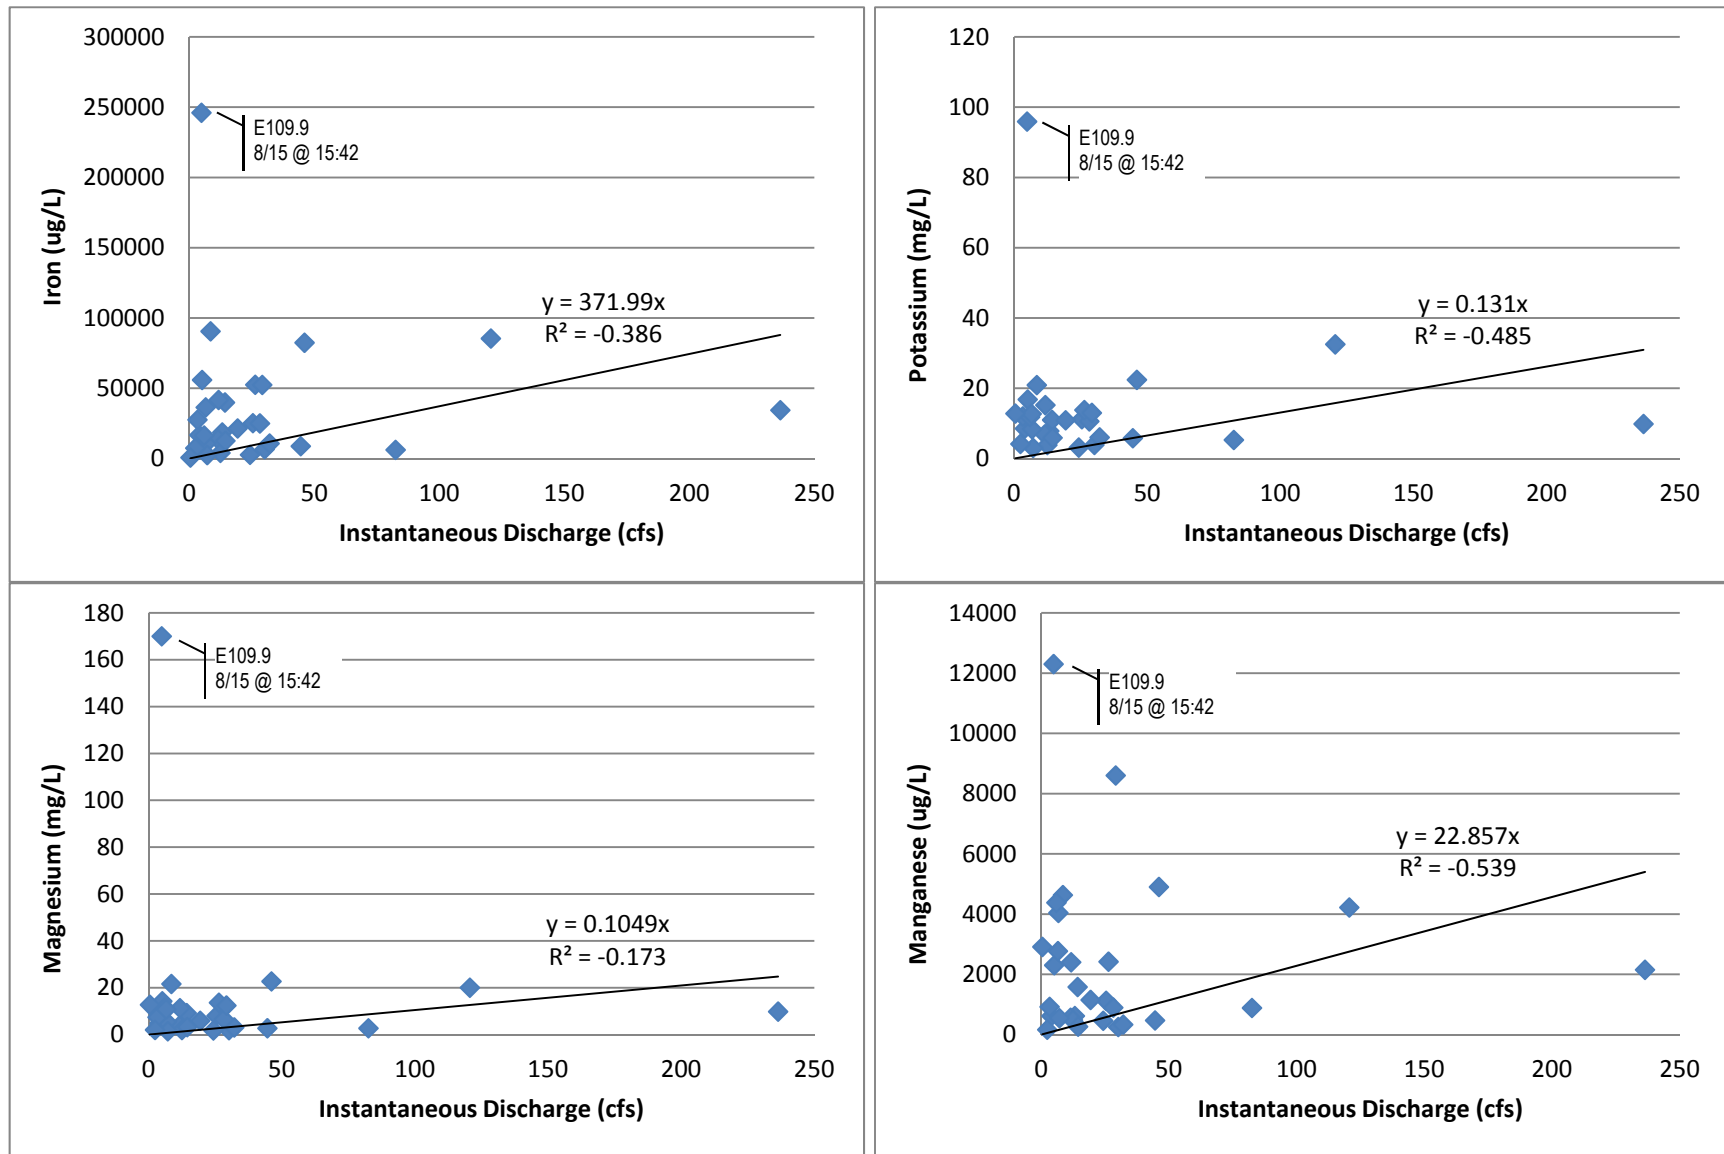


Figure 4.4-3 (continued) Relationship of instantaneous discharge to detected constituents in stormwater within the LA/P Watershed

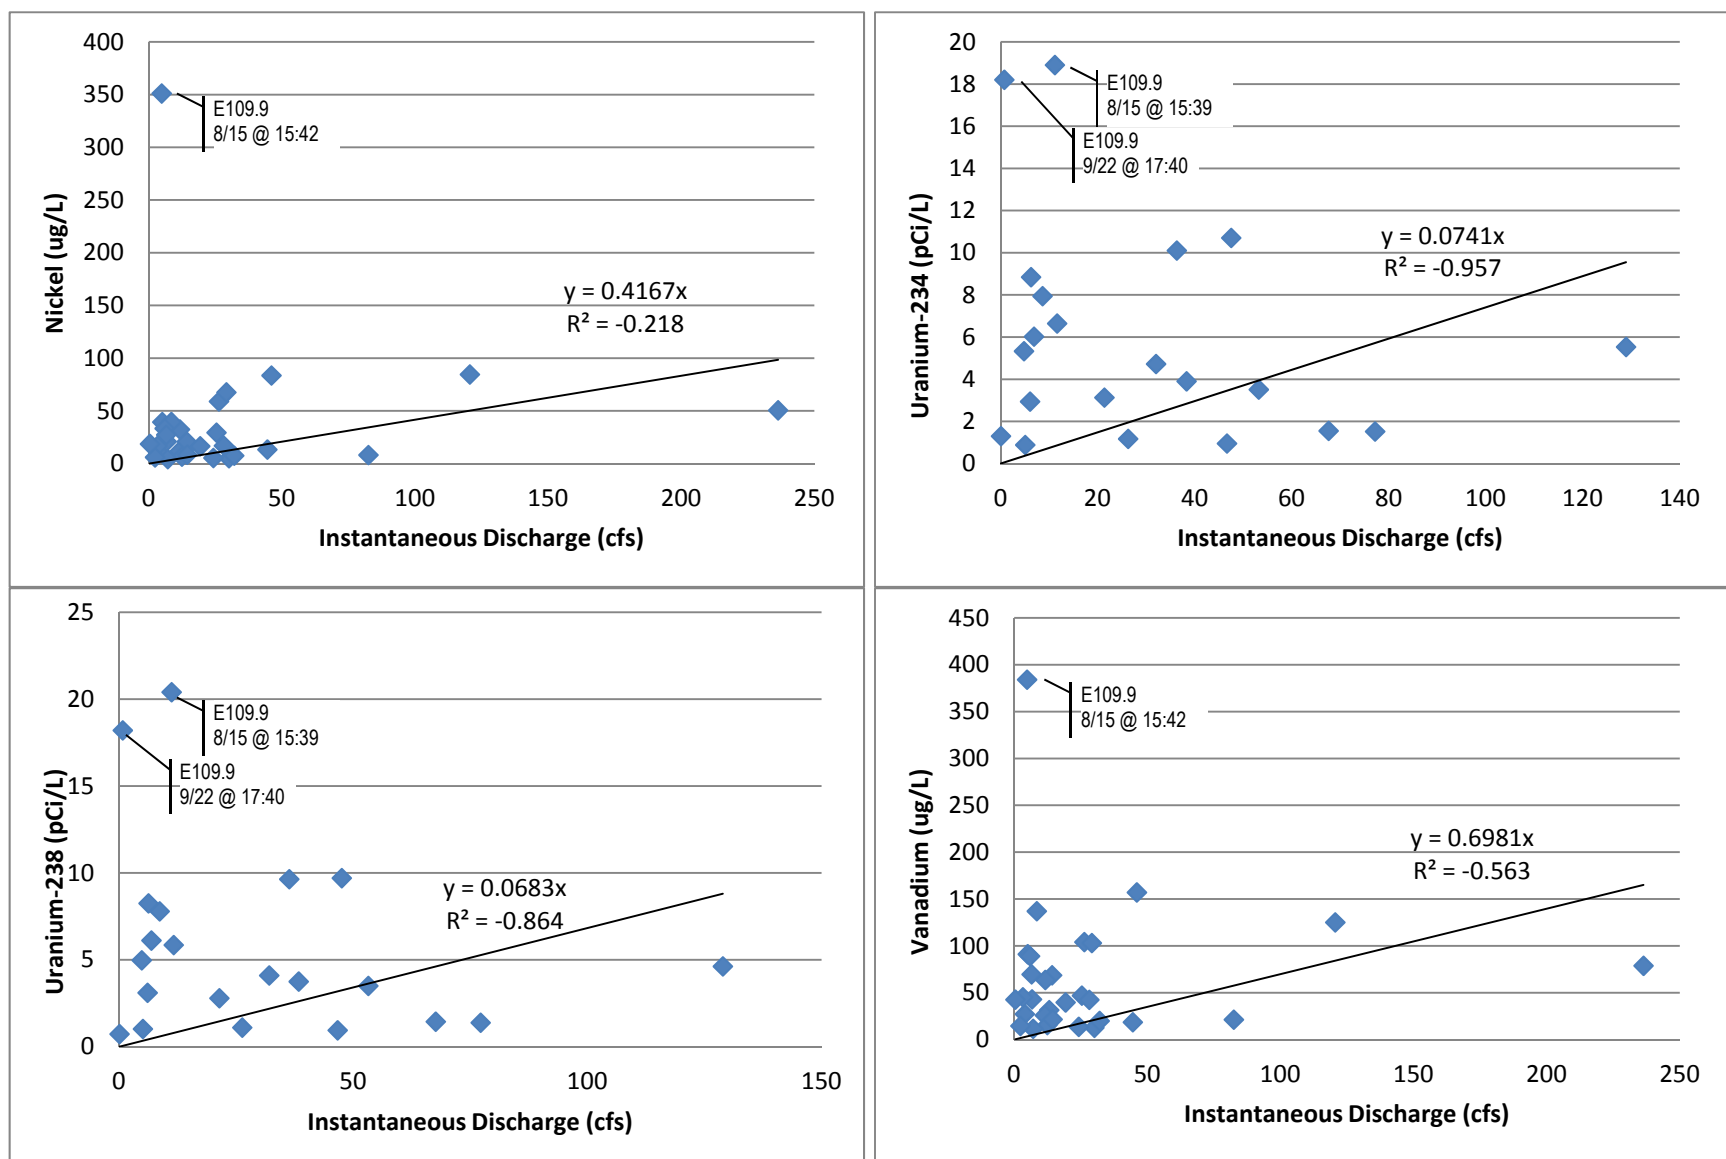


Figure 4.4-3 (continued) Relationship of instantaneous discharge to detected constituents in stormwater within the LA/P Watershed

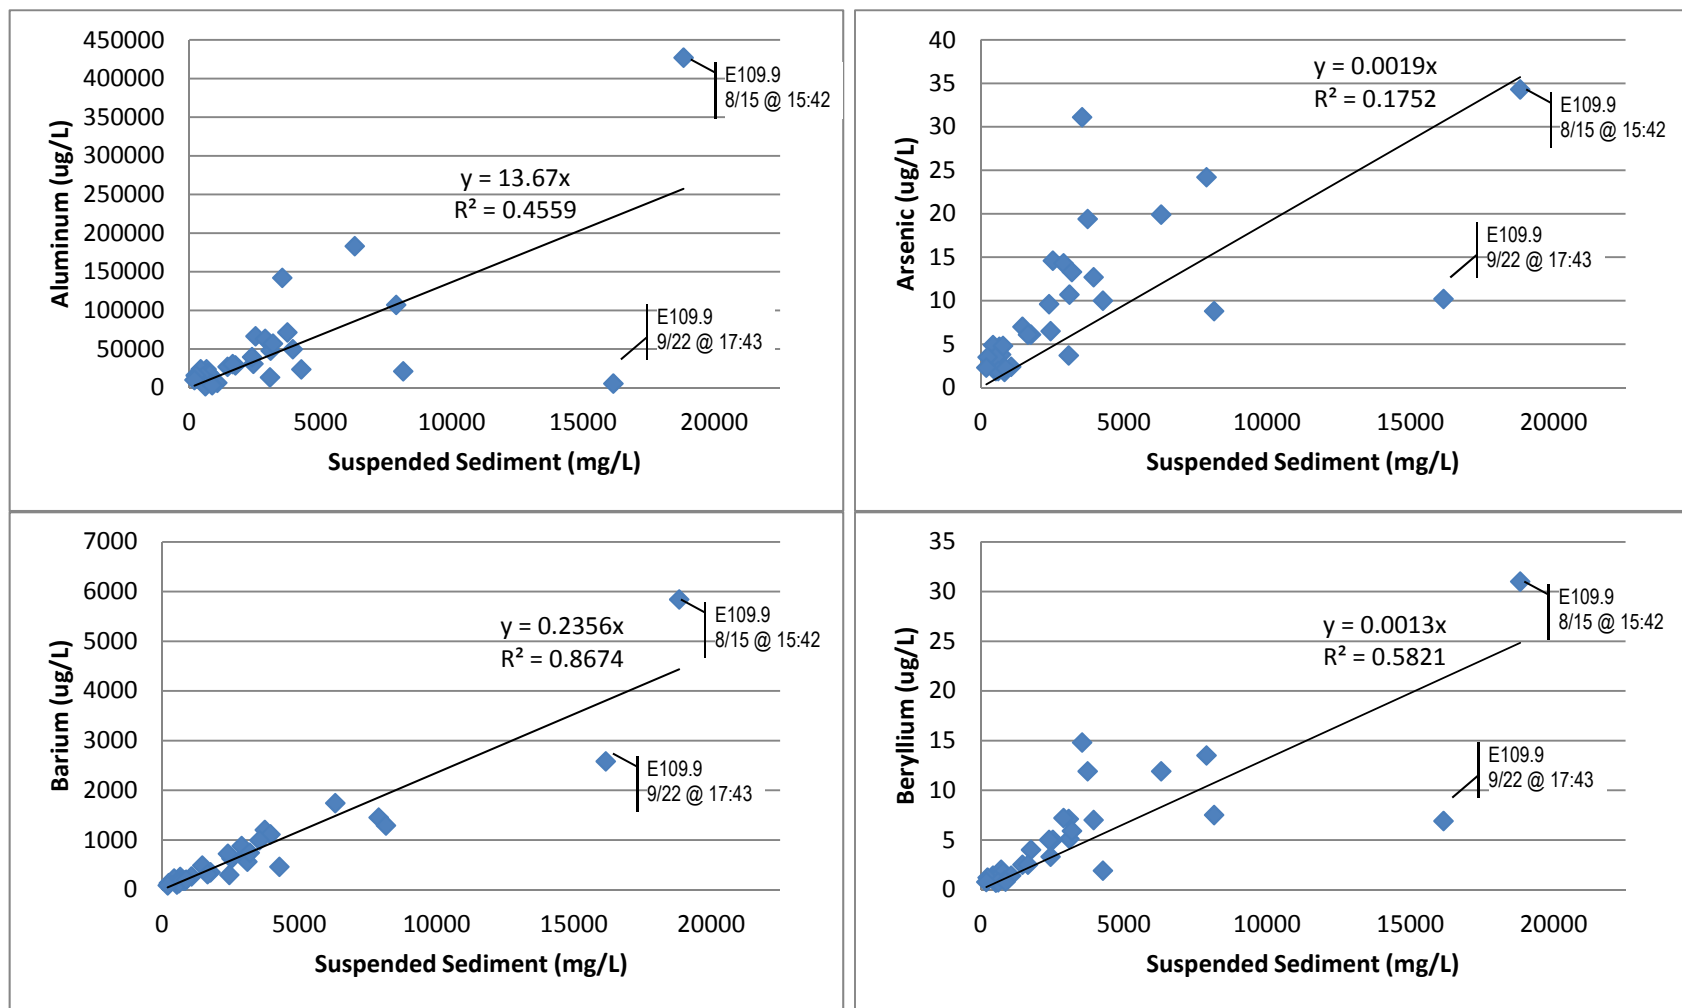


Figure 4.4-4 Relationship of suspended sediment to other constituents in stormwater within the LA/P Watershed

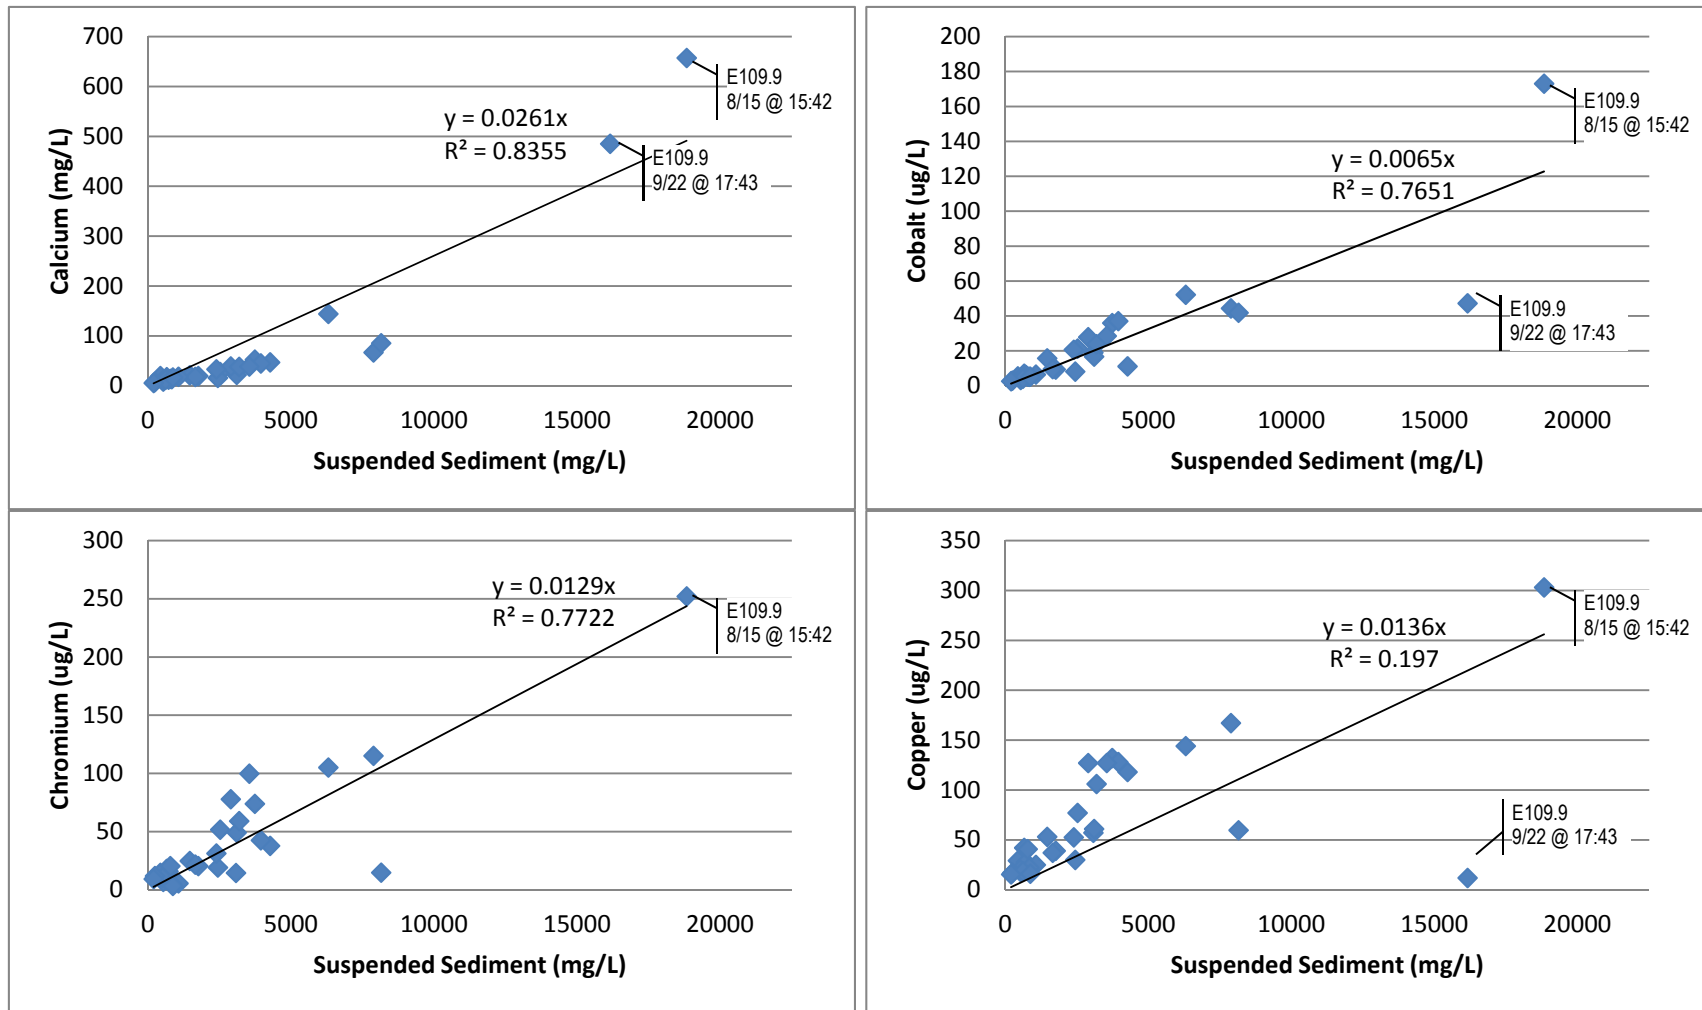


Figure 4.4-4 (continued) Relationship of suspended sediment to other constituents in stormwater within the LA/P Watershed

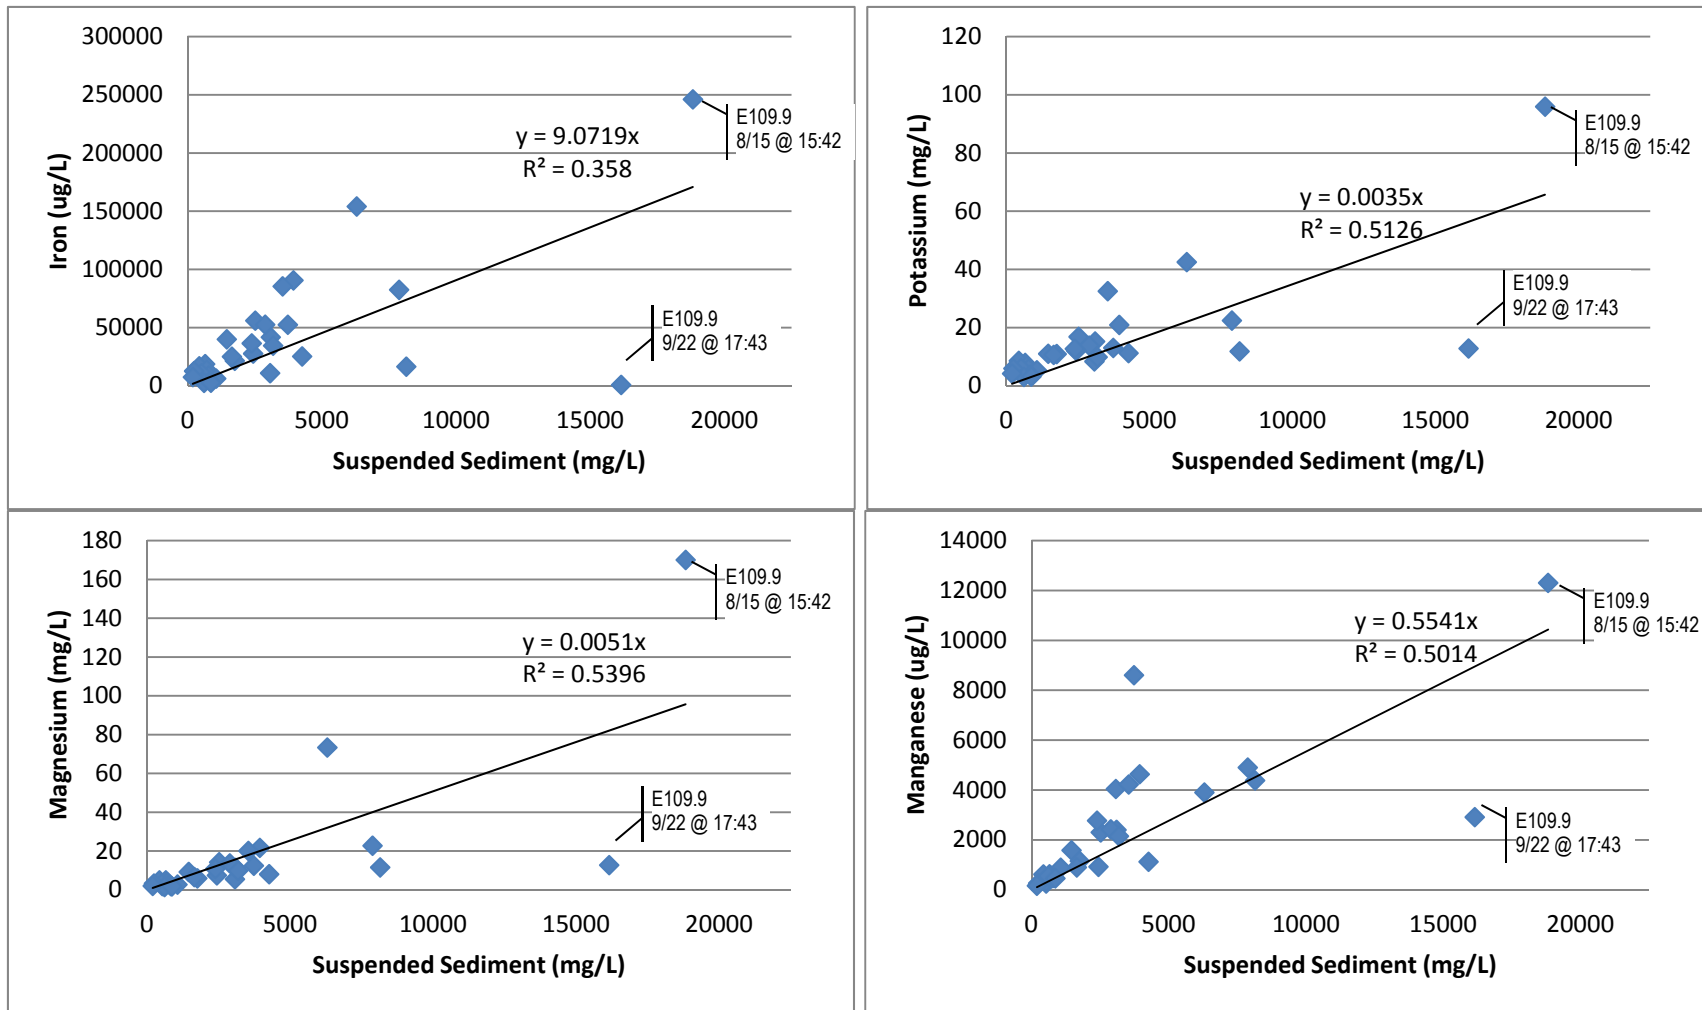


Figure 4.4-4 (continued) Relationship of suspended sediment to other constituents in stormwater within the LA/P Watershed

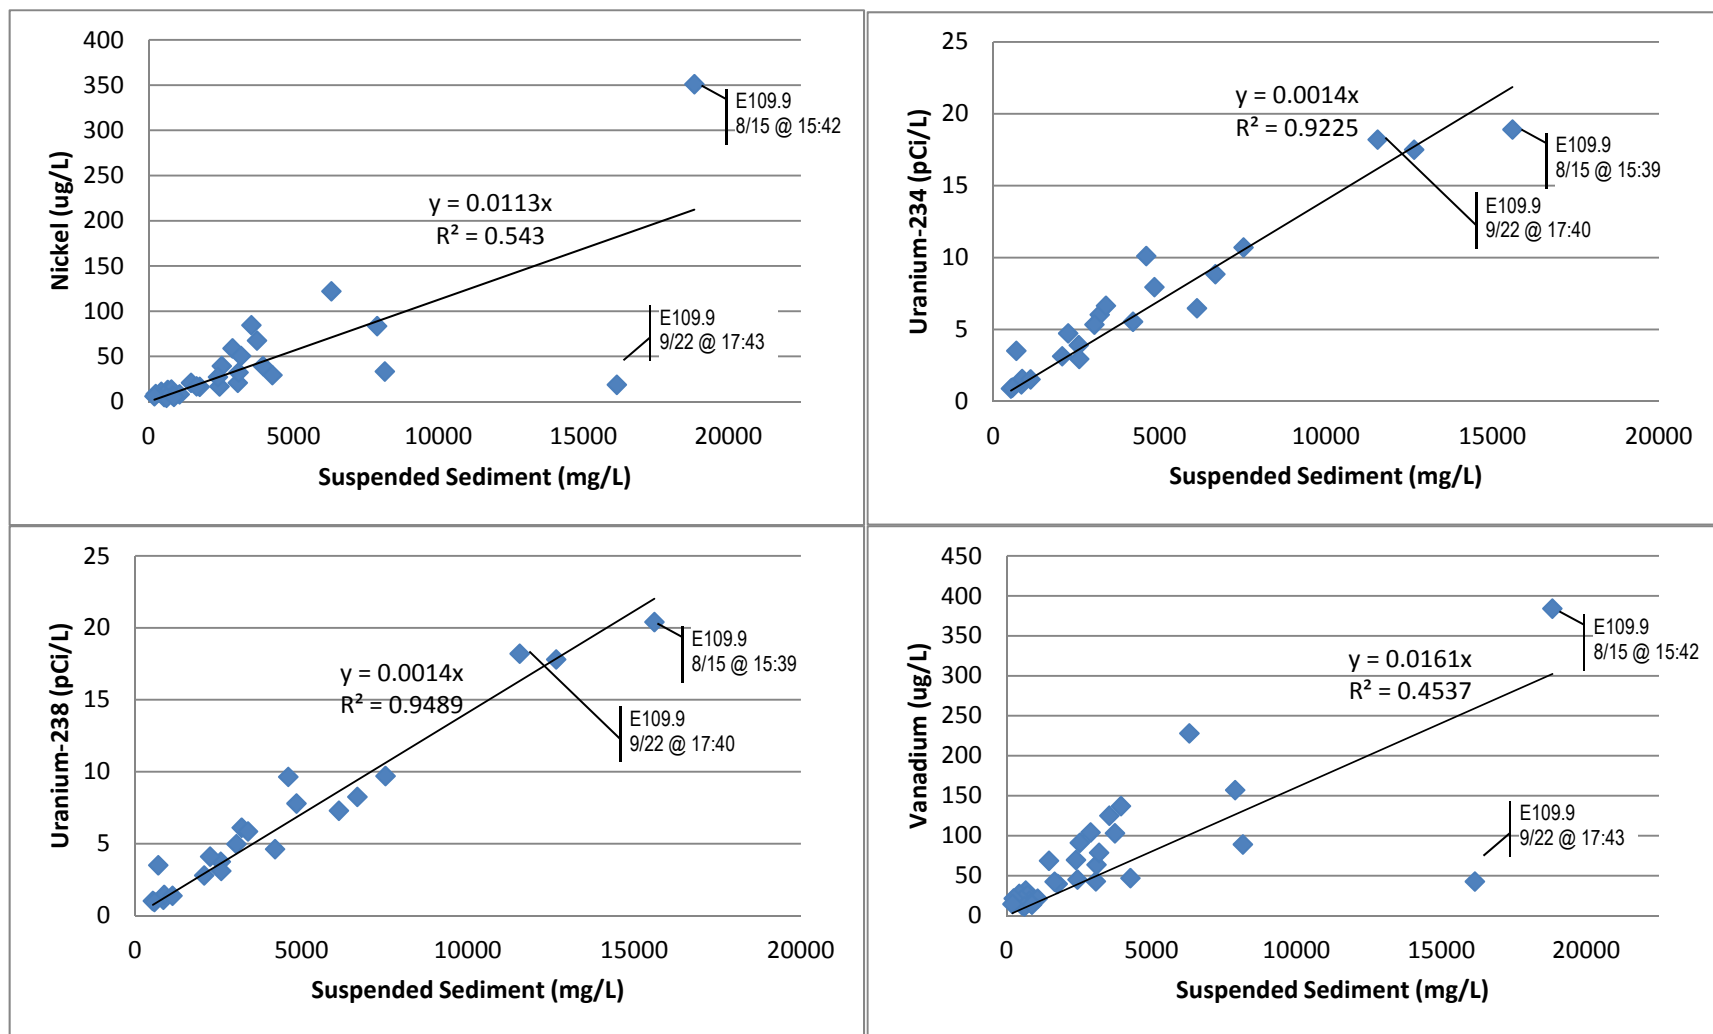


Figure 4.4-4 (continued) Relationship of suspended sediment to other constituents in stormwater within the LA/P Watershed

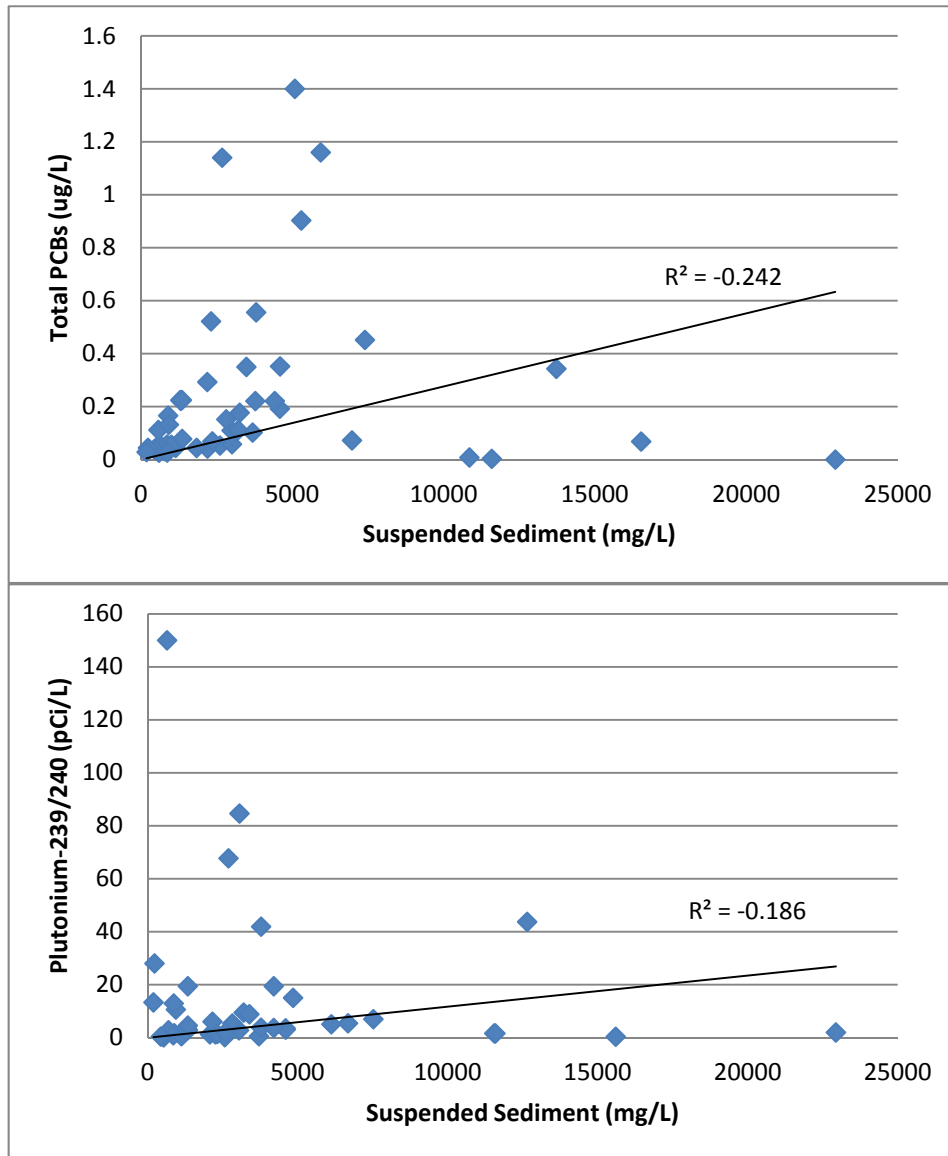


Figure 4.4-5 Relationship of suspended sediment to plutonium-239/240 and total PCBs within the LA/P Watershed

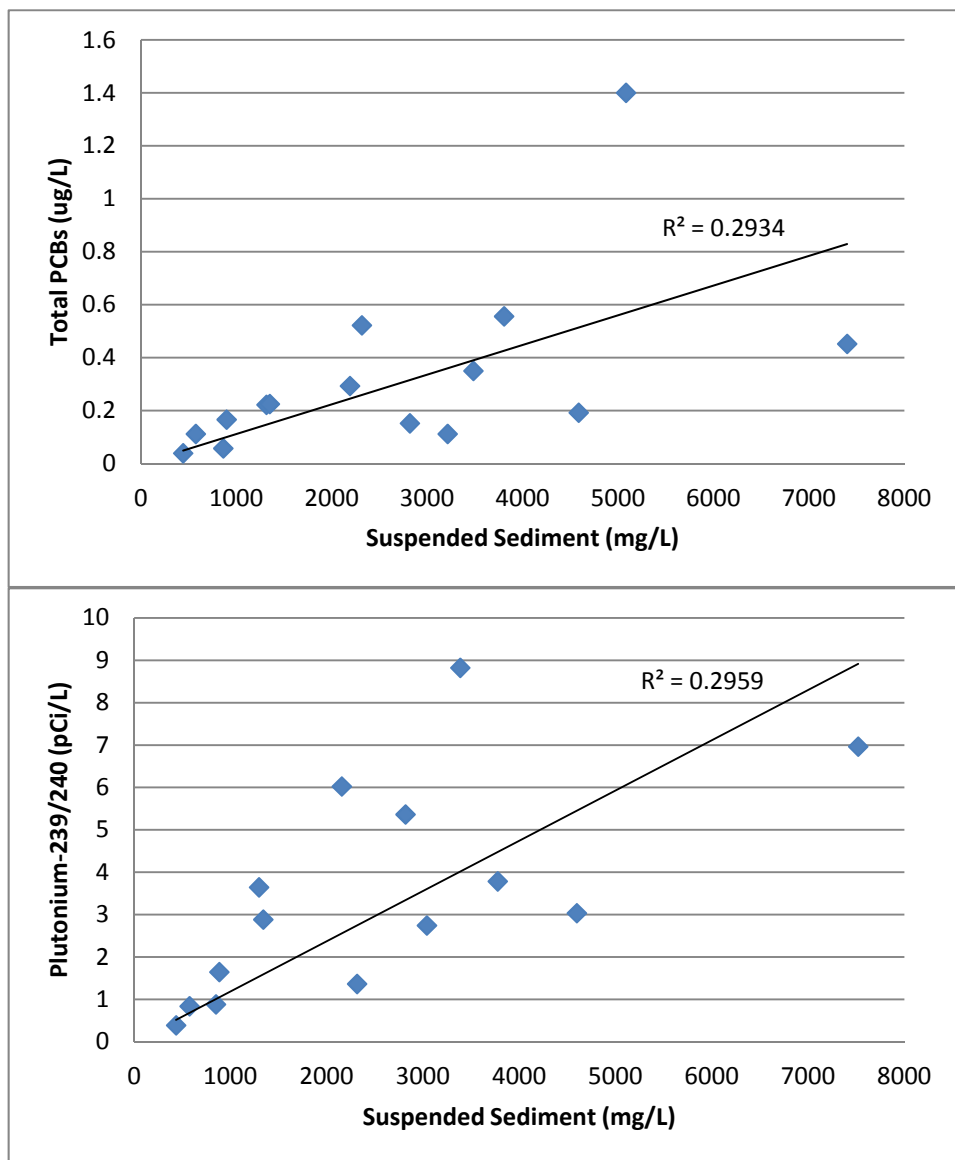


Figure 4.4-6 Relationship of plutonium-239/240 and total PCBs to suspended sediment at E042.1

Table 2.0-1
Station Configuration at LA/P Gages

Gage	Stage Measurement Device	Communication Method with Gage Datalogger	Sampler Trip Level (aboveground)	Sampler Intake Level (aboveground)
E026	Encoder	Manual download	1.3 ft	4 in.
E030	Encoder	Manual download	1.54 ft	4 in.
E038	Bubbler	Dial-up modem	0.7 ft	4 in.
E039.1	Encoder	Manual download	0.58 ft	4 in.
E040	Probe	Manual download	1.21 ft	4 in.
E042.1	Encoder	Dial-up modem	0.58 ft	4 in.
E050.1	Encoder/bubbler	Radio telemetry	0.4 ft	2.4 in.
E055	Bubbler	Manual download	1.21 ft	4 in.
E055.5	Bubbler	Manual download	0.75 ft	4 in.
E056	Bubbler	Manual download	1.39 ft	4 in.
E059	Encoder	Manual download	0.58 ft	4 in.
E060.1	Encoder/bubbler	Radio telemetry	0.4 ft	2.4 in.
E109.9	Encoder/bubbler	Radio telemetry	0.4 ft	2.4 in.

Table 2.2-1
Maximum Discharge and Sampling in the LA/P Watershed

Date	LA Canyon Discharge (cfs)								Pueblo Canyon Discharge (cfs)				
	DP Canyon			LA Canyon					Acid Canyon		Pueblo Canyon		
	E038	E039.1	E040	E026	E030	E042.1	E050.1	E109.9	E055.5	E056	E055	E059	E060.1
05/14/10	74 NS ^a	23 NS	12 NS	2 NS	3 NS	3 NS	na ^b	<1 NS	3 NS	10 NS	4 NS	na	0
05/15/10	32 NS	41 NS	33 NS	2 NS	5 NS	14 NS	na	<1 NS	2 NS	11 NS	5 NS	na	0
06/24/10	38 S ^c	2 NS	0 ^d	0	0	0	na	0	4 NS	<1 NS	0	na	0
07/02/10	13 NS	<1 NS	0	0	0	0	na	0	0	<1 NS	0	na	0
07/03/10	38 NS	4 NS	0	0	0	0	na	0	3 NS	<1 NS	0	na	0
07/09/10	59 S	6 S	0	0	0	0	na	0	9 NS	2 NS	0	na	0
07/22/10	112 S	52 S ^e	22 S	<1 NS	7 S	13 S	0	0	23 S	61 NS	15 S	na	0
07/24/10	8 NS	1 NS	<1 NS	0	0	0	0	0	0	11 NS	5 NS	na	0
07/25/10	42 NS	16 NS	5 NS	1 NS	8 NS	11 NS	0	0	31 NS	55 NS	8 NS	na	0
07/30/10	58 S	54 S	37 S	0	0	0	0	0	2 NS	3 NS	<1 NS	na	0
07/31/10	7 NS	3 NS	20 NS	0	0	6 S	0	0	0	<1 NS	<1 NS	na	0
08/04/10	29 NS	<1 NS	0	0	0	0	0	0	1 NS	<1 NS	0	na	0
08/05/10	186 NS	276 NS	209 NS	4 NS	10 S	48 S	20 NS	0	42 S	238 S	33 S	134 ^f S	0
08/09/10	63 NS	16 NS	10 NS	0	0	0	0	0	4 NS	<1 NS	1 NS	na	0
08/15/10	156 NS	197 S	86 S	<1 NS	8 S	54 S	31 NS	439 S	25 S	68 S	9 S	49 NS	1 NS
08/16/10	202 NS	315 NS	263 NS	6 NS	30 NS	99 S	79 NS	243 NS	69 NS	255 NS	41 NS	250 NS	132 S
08/17/10	1 NS	1 NS	<1 NS	0	0	<1 NS	0	4 NS	<1 NS	38 NS	3 NS	0	2 NS
08/23/10	160 NS	151 NS	31 S	<1 NS	7 S	19 NS	0	779 ^f S	25 S	94 NS	14 NS	46 NS	0
09/08/10	47 NS	2 NS	0	0	0	0	0	0	1 NS	<1 NS	0	0	0
09/22/10	86 NS	107 NS	2 NS	0	3 NS	18 NS	0	48 S	12 NS	30 S	3 NS	0	0
10/05/10	25 NS	3 NS	0	0	0	0	0	0	2 NS	<1 NS	0	0	0
10/20/10	19 S	1 NS	0	0	0	0	0	0	2 NS	13 NS	0	0	0
10/21/10	25 NS	15. S	<1 NS	0	0	0	0	0	2 NS	21 NS	1 NS	0	0

^a NS = Sample was not collected on day with discharge. Cell is highlighted in yellow.

^b na = Not available. Cell is highlighted in grey.

^c S = Sample was collected on day with discharge. Cell is highlighted in green.

^d Zero discharge occurred. Cell is highlighted in orange.

^e Sample collection at E039.1 is recorded to have occurred on July 21— a day without flow at any gaging station or precipitation at any rain gage.

^f Flow is estimated.

Table 2.3-1
Locations and Analytical Suites for Stormwater Samples

Monitoring Group	Locations	Analytical Suite
Upper Los Alamos Canyon	E038, E039.1, E040, E026, E030	Suspended sediment, PCBs (by method 1668A), gamma spectroscopy radionuclides, isotopic plutonium, isotopic uranium, strontium-90, dioxins and furans, TAL metals, hardness, gross alpha, suspended sediment
Upper Pueblo Canyon	E055, E055.5, E056	Suspended sediment, PCBs (by method 1668A), isotopic plutonium, dioxins and furans, TAL metals, hardness, gross alpha, suspended sediment
Lower watershed	E042.1, E050.1, E059, E060.1, E109.9	PCBs (by method 1668A), isotopic plutonium, gamma spectroscopy radionuclides, isotopic uranium, americium-241 (by alpha spectroscopy), strontium-90, dioxins and furans, TAL metals, hardness, gross alpha, gross beta, radium-226/radium-228, suspended sediment
Retention basins and wetland below the SWMU 01-001(f) drainage	CO101038, CO101039, CO101040	Suspended sediment, TAL metals, hardness, PCBs (by method 1668A), isotopic uranium, total organic carbon, gross alpha, gross beta

Table 2.3-2
Analytical Requirements for Stormwater Samples

Analytical Suite	Method	Detection Limit	Upper Los Alamos Canyon	Upper Pueblo Canyon	Lower Watershed	Retention Basins and Wetland below the SWMU 01-001(f) Drainage
PCBs	EPA:1668A	25 pg/L	√ ^a	√	√	√
Isotopic plutonium	HASL-300	0.5 pCi/L	√	√	√	— ^b
Gamma spectroscopy radionuclides	EPA:901.1	3 pCi/L (cesium-137)	√	—	√	—
Isotopic uranium	HASL-300	0.5 pCi/L	√	—	√	√
Americium-241	HASL-300	0.5 pCi/L	—	—	√	—
Strontium-90	EPA:905.0	0.5 pCi/L	√	—	√	—
TAL metals	EPA:200.7/200.8/245.2	Variable	√	√	√	√
Dioxins and furans	EPA:1613B	1.0 pg/L	√	√	√	—
Gross alpha	EPA:900	3 pCi/L	√	√	√	√
Gross beta	EPA:900	1 pCi/L	—	—	√	√
Radium-226/radium-228	EPA:903.1/EPA:904	0.5/0.5 pCi/L	—	—	√	—
Suspended sediment	EPA:160.2	10 mg/L	√	√	√	—
Total organic carbon	SW-846:9060	0.5 mg/L	—	—	—	√

^a Monitoring required.

^b Monitoring not requested.

**Table 2.3-3
Summary of Samples Collected and Analyses Requested**

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E030	7/22/10 20:32	UF ^a	— ^b	—	—	—	—	—	—	10-18004 ^c	—	10-18022
E030	7/22/10 20:34	UF	—	—	10-18054	—	10-18054	—	—	—	—	—
E030	7/22/10 20:35	UF	—	—	—	—	—	—	—	—	10-17988	—
E030	7/22/10 20:36	UF	—	10-18038	—	—	—	—	—	—	—	—
E030	7/22/10 20:38	F ^d	—	—	—	—	—	—	10-17932	—	—	—
E030	7/22/10 20:38	UF	—	—	—	—	—	—	10-17936	—	—	—
E030	7/22/10 20:39	UF	—	—	—	10-17972 ^e	—	—	—	—	—	—
E030	7/22/10 20:40	UF	—	—	—	—	—	—	—	—	—	10-18070
E030	8/5/10 15:13	UF	—	—	—	—	—	—	—	—	—	10-18023
E030	8/5/10 15:14	UF	—	—	—	—	—	—	—	10-18005	—	—
E030	8/5/10 15:16	UF	—	—	10-18055	—	10-18055	—	—	—	—	—
E030	8/5/10 15:17	UF	—	—	—	—	—	—	—	—	10-17989	—
E030	8/5/10 15:18	UF	—	10-18039	—	—	—	—	—	—	—	—
E030	8/5/10 15:20	F	—	—	—	—	—	—	10-17933	—	—	—
E030	8/5/10 15:20	UF	—	—	—	—	—	—	10-17937	—	—	—
E030	8/5/10 15:21	UF	—	—	—	10-17973 ^e	—	—	—	—	—	—
E030	8/5/10 15:22	UF	—	—	—	—	—	—	—	—	—	10-18071
E030	8/15/10 17:52	UF	—	—	—	—	—	—	—	—	—	10-18024
E030	8/15/10 17:53	UF	—	—	—	—	—	—	—	10-18006	—	—
E030	8/15/10 17:55	UF	—	—	10-18056	—	10-18056	—	—	—	—	—
E030	8/15/10 17:56	UF	—	—	—	—	—	—	—	—	10-17990	—

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E030	8/15/10 17:57	UF	—	10-18040	—	—	—	—	—	—	—	—
E030	8/15/10 17:59	F	—	—	—	—	—	—	10-17934	—	—	—
E030	8/15/10 17:59	UF	—	—	—	—	—	—	10-17938	—	—	—
E030	8/15/10 18:00	UF	—	—	—	10-17974 ^e	—	—	—	—	—	—
E030	8/15/10 18:02	UF	—	—	—	—	—	—	—	—	—	10-18072
E030	8/23/10 20:17	UF	—	—	—	—	—	—	—	—	—	10-18025
E030	8/23/10 20:18	UF	—	—	—	—	—	—	—	10-18007	—	—
E030	8/23/10 20:20	UF	—	—	10-18057	—	10-18057	—	—	—	—	—
E030	8/23/10 20:21	UF	—	—	—	—	—	—	—	—	10-17991	—
E030	8/23/10 20:22	UF	—	10-18041	—	—	—	—	—	—	—	—
E030	8/23/10 20:24	F	—	—	—	—	—	—	10-17935	—	—	—
E030	8/23/10 20:24	UF	—	—	—	—	—	—	10-17939	—	—	—
E030	8/23/10 20:26	UF	—	—	—	10-17975 ^e	—	—	—	—	—	—
E030	8/23/10 20:27	UF	—	—	—	—	—	—	—	—	—	10-18073
E038	6/24/10 15:58	UF	—	—	—	—	—	—	—	—	—	10-18014
E038	6/24/10 16:00	UF	—	—	10-18046	—	10-18046	—	—	—	—	—
E038	6/24/10 16:01	UF	—	10-17996	—	—	—	—	—	10-17996	—	—
E038	6/24/10 16:03	UF	—	—	—	—	—	—	—	—	10-17980	—
E038	6/24/10 16:04	F	—	—	—	—	—	—	10-17924	—	—	—
E038	6/24/10 16:04	UF	—	—	—	—	—	—	10-17928	—	—	—
E038	6/24/10 16:05	UF	—	—	—	—	—	—	—	—	—	10-18062

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E038	6/24/10 16:06	UF	—	10-18030	—	—	—	—	—	10-18030	—	—
E038	7/9/10 20:55	UF	—	—	—	—	—	—	—	—	—	10-18015
E038	7/9/10 20:56	UF	—	—	—	—	—	—	—	10-17997	—	—
E038	7/9/10 20:58	UF	—	—	10-18047	—	10-18047	—	—	—	—	—
E038	7/9/10 21:00	UF	—	—	—	—	—	—	—	—	10-17981	—
E038	7/9/10 21:01	UF	—	10-18031	—	—	—	—	—	—	—	—
E038	7/9/10 21:03	F	—	—	—	—	—	—	10-17925	—	—	—
E038	7/9/10 21:03	UF	—	—	—	—	—	—	10-17929	—	—	—
E038	7/9/10 21:04	UF	—	—	—	10-17965 ^e	—	—	—	—	—	—
E038	7/9/10 21:05	UF	—	—	—	—	—	—	—	—	—	10-18063
E038	7/22/10 19:06	UF	—	—	—	—	—	—	—	—	—	10-18016
E038	7/22/10 19:07	UF	—	—	—	—	—	—	—	10-17998	—	—
E038	7/22/10 19:09	UF	—	—	10-18048	—	10-18048	—	—	—	—	—
E038	7/22/10 19:10	UF	—	—	—	—	—	—	—	—	10-17982	—
E038	7/22/10 19:12	UF	—	10-18032	—	—	—	—	—	—	—	—
E038	7/22/10 19:14	F	—	—	—	—	—	—	10-17926	—	—	—
E038	7/22/10 19:14	UF	—	—	—	—	—	—	10-17930	—	—	—
E038	7/22/10 19:15	UF	—	—	—	10-17966 ^e	—	—	—	—	—	—
E038	7/22/10 19:16	UF	—	—	—	—	—	—	—	—	—	10-18064
E038	7/30/10 22:20	UF	—	—	—	—	—	—	—	—	—	10-18017
E038	7/30/10 22:21	UF	—	—	—	—	—	—	—	10-17999	—	—

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E038	7/30/10 22:24	UF	—	—	10-18049	—	10-18049	—	—	—	—	—
E038	7/30/10 22:25	UF	—	—	—	—	—	—	—	—	10-17983	—
E038	7/30/10 22:26	UF	—	10-18033	—	—	—	—	—	—	—	—
E038	7/30/10 22:29	F	—	—	—	—	—	—	10-17927	—	—	—
E038	7/30/10 22:29	UF	—	—	—	—	—	—	10-17931	—	—	—
E038	7/30/10 22:30	UF	—	—	—	10-17967 ^e	—	—	—	—	—	—
E038	7/30/10 22:31	UF	—	—	—	—	—	—	—	—	—	10-18065
E038	10/20/10 18:11	UF	—	—	—	—	—	—	—	—	—	11-2317
E038	10/20/10 18:12	UF	—	—	—	—	—	—	—	—	—	11-2320
E038	10/20/10 18:13	UF	—	—	—	—	—	—	—	—	—	11-2322
E038	10/20/10 18:14	UF	—	—	—	—	—	—	—	—	—	11-2324
E038	10/20/10 18:15	UF	—	—	—	—	—	—	—	—	—	11-2328
E038	10/20/10 18:17	UF	—	—	—	—	—	—	—	—	—	11-2330
E038	10/20/10 18:18	UF	—	—	—	—	—	—	—	—	—	11-2331
E038	10/20/10 18:19	UF	—	—	—	—	—	—	—	—	—	11-2332
E038	10/20/10 18:20	UF	—	—	—	—	—	—	—	—	—	11-2334
E038	10/20/10 18:21	UF	—	—	—	—	—	—	—	—	—	11-2336
E039.1	7/9/10 21:40	UF	—	—	—	—	—	—	—	—	—	10-18018
E039.1	7/9/10 21:41	UF	—	—	—	—	—	—	—	10-18000	—	—
E039.1	7/9/10 21:43	UF	—	—	10-18050	—	10-18050	—	—	—	—	—
E039.1	7/9/10 21:44	UF	—	—	—	—	—	—	—	—	10-17984	—

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E039.1	7/9/10 21:45	UF	—	10-18034	—	—	—	—	—	—	—	—
E039.1	7/9/10 21:47	F	—	—	—	—	—	—	10-17940	—	—	—
E039.1	7/9/10 21:47	UF	—	—	—	—	—	—	10-17944	—	—	—
E039.1	7/9/10 21:48	UF	—	—	—	10-17968 ^e	—	—	—	—	—	—
E039.1	7/9/10 21:49	UF	—	—	—	—	—	—	—	—	—	10-18066
E039.1	7/21/10 19:05	UF	—	—	—	—	—	—	—	10-18001	—	10-18019
E039.1	7/21/10 19:09	UF	—	—	10-18051	—	10-18051	—	—	—	—	—
E039.1	7/21/10 19:10	UF	—	—	—	—	—	—	—	—	10-17985	—
E039.1	7/21/10 19:12	UF	—	10-18035	—	—	—	—	—	—	—	—
E039.1	7/21/10 19:15	F	—	—	—	—	—	—	10-17941	—	—	—
E039.1	7/21/10 19:15	UF	—	—	—	—	—	—	10-17945	—	—	—
E039.1	7/21/10 19:17	UF	—	—	—	10-17969 ^e	—	—	—	—	—	—
E039.1	7/21/10 19:18	UF	—	—	—	—	—	—	—	—	—	10-18067
E039.1	7/30/10 22:49	UF	—	—	—	—	—	—	—	—	—	10-18020
E039.1	7/30/10 22:51	UF	—	—	—	—	—	—	—	10-18002	—	—
E039.1	7/30/10 22:54	UF	—	—	10-18052	—	10-18052	—	—	—	—	—
E039.1	7/30/10 22:56	UF	—	—	—	—	—	—	—	—	10-17986	—
E039.1	7/30/10 22:57	UF	—	10-18036	—	—	—	—	—	—	—	—
E039.1	7/30/10 23:01	F	—	—	—	—	—	—	10-17942	—	—	—
E039.1	7/30/10 23:01	UF	—	—	—	—	—	—	10-17946	—	—	—
E039.1	7/30/10 23:02	UF	—	—	—	10-17970 ^e	—	—	—	—	—	—

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E039.1	7/30/10 23:04	UF	—	—	—	—	—	—	—	—	—	10-18068
E039.1	8/15/10 16:07	UF	—	—	—	—	—	—	—	—	—	10-18021
E039.1	8/15/10 16:09	UF	—	—	—	—	—	—	—	10-18003	—	—
E039.1	8/15/10 16:12	UF	—	—	10-18053	—	10-18053	—	—	—	—	—
E039.1	8/15/10 16:14	UF	—	—	—	—	—	—	—	—	10-17987	—
E039.1	8/15/10 16:15	UF	—	10-18037	—	—	—	—	—	—	—	—
E039.1	8/15/10 16:19	F	—	—	—	—	—	—	10-17943	—	—	—
E039.1	8/15/10 16:19	UF	—	—	—	—	—	—	10-17947	—	—	—
E039.1	8/15/10 16:20	UF	—	—	—	10-17971 ^e	—	—	—	—	—	—
E039.1	8/15/10 16:22	UF	—	—	—	—	—	—	—	—	—	10-18069
E039.1	10/21/10 6:05	UF	—	—	—	—	—	—	—	—	—	11-2318
E039.1	10/21/10 6:07	UF	—	—	—	—	—	—	—	—	—	11-2319
E039.1	10/21/10 6:08	UF	—	—	—	—	—	—	—	—	—	11-2321
E039.1	10/21/10 6:10	UF	—	—	—	—	—	—	—	—	—	11-2323
E039.1	10/21/10 6:12	UF	—	—	—	—	—	—	—	—	—	11-2325
E039.1	10/21/10 6:14	UF	—	—	—	—	—	—	—	—	—	11-2326
E039.1	10/21/10 6:15	UF	—	—	—	—	—	—	—	—	—	11-2327
E039.1	10/21/10 6:17	UF	—	—	—	—	—	—	—	—	—	11-2329
E039.1	10/21/10 6:19	UF	—	—	—	—	—	—	—	—	—	11-2333
E039.1	10/21/10 6:21	UF	—	—	—	—	—	—	—	—	—	11-2335
E040	7/22/10 20:45	UF	—	—	—	—	—	—	—	—	—	10-18010

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E040	7/22/10 20:46	UF	—	—	—	—	—	—	—	10-17992	—	—
E040	7/22/10 20:48	UF	—	—	10-18042	—	10-18042	—	—	—	—	—
E040	7/22/10 20:49	UF	—	—	—	—	—	—	—	—	10-17976	—
E040	7/22/10 20:50	UF	—	10-18026	—	—	—	—	—	—	—	—
E040	7/22/10 20:53	F	—	—	—	—	—	—	10-17916	—	—	—
E040	7/22/10 20:53	UF	—	—	—	—	—	—	10-17920	—	—	—
E040	7/22/10 20:54	UF	—	—	—	10-17960 ^e	—	—	—	—	—	—
E040	7/22/10 20:55	UF	—	—	—	—	—	—	—	—	—	10-18058
E040	7/30/10 23:28	UF	—	—	—	—	—	—	—	—	—	10-18011
E040	7/30/10 23:29	UF	—	—	—	—	—	—	—	10-17993	—	—
E040	7/30/10 23:32	UF	—	—	10-18043	—	10-18043	—	—	—	—	—
E040	7/30/10 23:33	UF	—	—	—	—	—	—	—	—	10-17977	—
E040	7/30/10 23:35	UF	—	10-18027	—	—	—	—	—	—	—	—
E040	7/30/10 23:37	F	—	—	—	—	—	—	10-17917	—	—	—
E040	7/30/10 23:37	UF	—	—	—	—	—	—	10-17921	—	—	—
E040	7/30/10 23:38	UF	—	—	—	10-17961 ^e	—	—	—	—	—	—
E040	7/30/10 23:39	UF	—	—	—	—	—	—	—	—	—	10-18059
E040	8/15/10 16:08	UF	—	—	—	—	—	—	—	—	—	10-18012
E040	8/15/10 16:12	UF	—	—	—	10-1796 ^e	—	—	—	—	—	—
E040	8/15/10 16:14	UF	—	—	—	—	—	—	10-17922	—	—	—
E040	8/15/10 16:16	F	—	—	—	—	—	—	10-17918	—	—	—

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E040	8/15/10 16:23	UF	—	—	—	—	—	—	—	—	—	10-18060
E040	8/23/10 20:02	UF	—	—	—	—	—	—	—	—	—	10-18013
E040	8/23/10 20:03	UF	—	—	—	—	—	—	—	10-17995	—	—
E040	8/23/10 20:06	UF	—	—	—	10-17963 ^e	—	—	—	—	—	—
E040	8/23/10 20:20	UF	—	—	—	—	—	—	—	—	—	10-18061
E042.1	7/22/10 21:36	UF	—	—	—	—	—	—	—	—	—	10-18535
E042.1	7/22/10 21:39	UF	—	—	—	—	—	—	—	—	—	10-18547
E042.1	7/22/10 21:42	UF	—	—	—	—	—	—	—	—	—	10-18559
E042.1	7/22/10 21:45	UF	—	—	—	—	—	—	—	—	—	10-18571
E042.1	7/22/10 21:46	UF	—	—	—	—	—	—	—	10-18229	—	—
E042.1	7/22/10 21:47	UF	10-18292	—	10-18292	—	10-18292	—	—	—	—	—
E042.1	7/22/10 21:48	UF	—	—	—	—	—	10-18398	—	—	10-18340	—
E042.1	7/22/10 21:49	UF	—	10-18352	—	—	—	—	—	—	—	—
E042.1	7/22/10 21:50	F	—	—	—	—	—	—	10-18370	—	—	—
E042.1	7/22/10 21:50	UF	—	—	—	—	—	—	10-18374	—	—	—
E042.1	7/22/10 21:51	UF	—	—	—	10-18422 ^e	—	—	—	—	—	10-18597
E042.1	7/22/10 21:57	UF	—	—	—	—	—	—	—	—	—	10-18609
E042.1	7/22/10 22:00	UF	—	—	—	—	—	—	—	—	—	10-18621
E042.1	7/22/10 22:03	UF	—	—	—	—	—	—	—	—	—	10-18633
E042.1	7/22/10 22:26	UF	—	—	—	—	—	—	—	—	—	10-18657
E042.1	7/22/10 22:36	UF	—	—	—	—	—	—	—	10-18250	—	—

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E042.1	7/22/10 22:37	UF	—	—	10-18304	—	10-18304	—	—	—	—	—
E042.1	7/22/10 22:46	UF	—	—	—	—	—	—	—	—	—	10-18669
E042.1	7/22/10 23:06	UF	—	—	—	—	—	—	—	—	—	10-18681
E042.1	7/22/10 23:21	UF	—	—	—	—	—	—	—	10-18255	—	—
E042.1	7/22/10 23:22	UF	—	—	10-18316	—	10-18316	—	—	—	—	—
E042.1	7/22/10 23:26	UF	—	—	—	—	—	—	—	—	—	10-18693
E042.1	7/22/10 23:46	UF	—	—	—	—	—	—	—	—	—	10-18705
E042.1	7/23/10 0:06	UF	—	—	—	—	—	—	—	10-18280	—	10-18717
E042.1	7/23/10 0:07	UF	—	—	10-18328	—	10-18328	—	—	—	—	—
E042.1	7/23/10 0:26	UF	—	—	—	—	—	—	—	—	—	10-18729
E042.1	7/23/10 0:46	UF	—	—	—	—	—	—	—	—	—	10-18741
E042.1	7/23/10 1:06	UF	—	—	—	—	—	—	—	—	—	10-18753
E042.1	7/23/10 1:26	UF	—	—	—	—	—	—	—	—	—	10-18765
E042.1	7/23/10 1:46	UF	—	—	—	—	—	—	—	—	—	10-18773
E042.1	7/23/10 2:06	UF	—	—	—	—	—	—	—	—	—	10-18781
E042.1	7/23/10 2:26	UF	—	—	—	—	—	—	—	—	—	10-18789
E042.1	7/31/10 0:39	UF	—	—	—	—	—	—	—	—	—	10-18536
E042.1	7/31/10 0:42	UF	—	—	—	—	—	—	—	—	—	10-18548
E042.1	7/31/10 0:45	UF	—	—	—	—	—	—	—	—	—	10-18560
E042.1	7/31/10 0:48	UF	—	—	—	—	—	—	—	—	—	10-18572
E042.1	7/31/10 0:50	UF	—	—	—	—	—	—	—	10-18230	—	—

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E042.1	7/31/10 0:51	UF	10-18293	—	10-18293	—	10-18293	10-18399	—	—	—	—
E042.1	7/31/10 0:52	UF	—	—	—	—	—	—	—	—	10-18341	—
E042.1	7/31/10 0:53	UF	—	10-18353	—	—	—	—	—	—	—	—
E042.1	7/31/10 0:54	F	—	—	—	—	—	—	10-18371	—	—	—
E042.1	7/31/10 0:54	UF	—	—	—	—	—	—	10-18375	—	—	10-18598
E042.1	7/31/10 1:00	UF	—	—	—	—	—	—	—	—	—	10-18610
E042.1	7/31/10 1:03	UF	—	—	—	—	—	—	—	—	—	10-18622
E042.1	7/31/10 1:06	UF	—	—	—	—	—	—	—	—	—	10-18634
E042.1	7/31/10 1:09	UF	—	—	—	—	—	—	—	—	—	10-18646
E042.1	7/31/10 1:29	UF	—	—	—	—	—	—	—	—	—	10-18658
E042.1	7/31/10 1:40	UF	—	—	—	—	—	—	—	10-18251	—	—
E042.1	7/31/10 1:41	UF	—	—	10-18305	—	10-18305	—	—	—	—	—
E042.1	7/31/10 1:49	UF	—	—	—	—	—	—	—	—	—	10-18670
E042.1	7/31/10 2:09	UF	—	—	—	—	—	—	—	—	—	10-18682
E042.1	7/31/10 2:25	UF	—	—	—	—	—	—	—	10-18256	—	—
E042.1	7/31/10 2:26	UF	—	—	10-18317	—	10-18317	—	—	—	—	—
E042.1	7/31/10 2:29	UF	—	—	—	—	—	—	—	—	—	10-18694
E042.1	7/31/10 2:49	UF	—	—	—	—	—	—	—	—	—	10-18706
E042.1	7/31/10 3:09	UF	—	—	—	—	—	—	—	—	—	10-18718
E042.1	7/31/10 3:29	UF	—	—	—	—	—	—	—	—	—	10-18730
E042.1	8/5/10 15:37	UF	—	—	—	—	—	—	—	—	—	10-18537

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E042.1	8/5/10 15:40	UF	—	—	—	—	—	—	—	—	—	10-18549
E042.1	8/5/10 15:43	UF	—	—	—	—	—	—	—	—	—	10-18561
E042.1	8/5/10 15:46	UF	—	—	—	—	—	—	—	—	—	10-18573
E042.1	8/5/10 15:47	UF	—	—	—	—	—	—	—	10-18231	—	—
E042.1	8/5/10 15:48	UF	10-18294	—	10-18294	—	10-18294	—	—	—	—	—
E042.1	8/5/10 15:49	UF	—	—	—	—	—	10-18400	—	—	10-18342	—
E042.1	8/5/10 15:50	UF	—	10-18354	—	—	—	—	—	—	—	—
E042.1	8/5/10 15:51	F	—	—	—	—	—	—	10-18372	—	—	—
E042.1	8/5/10 15:51	UF	—	—	—	—	—	—	10-18376	—	—	—
E042.1	8/5/10 15:52	UF	—	—	—	10-18424 ^e	—	—	—	—	—	10-18599
E042.1	8/5/10 15:58	UF	—	—	—	—	—	—	—	—	—	10-18611
E042.1	8/5/10 16:01	UF	—	—	—	—	—	—	—	—	—	10-18623
E042.1	8/5/10 16:04	UF	—	—	—	—	—	—	—	—	—	10-18635
E042.1	8/5/10 16:07	UF	—	—	—	—	—	—	—	—	—	10-18647
E042.1	8/5/10 16:27	UF	—	—	—	—	—	—	—	—	—	10-18659
E042.1	8/5/10 16:37	UF	—	—	—	—	—	—	—	10-18252	—	—
E042.1	8/5/10 16:38	UF	—	—	10-18306	—	10-18306	—	—	—	—	—
E042.1	8/5/10 16:47	UF	—	—	—	—	—	—	—	—	—	10-18671
E042.1	8/5/10 17:07	UF	—	—	—	—	—	—	—	—	—	10-18683
E042.1	8/5/10 17:22	UF	—	—	—	—	—	—	—	10-18257	—	—
E042.1	8/5/10 17:23	UF	—	—	10-18318	—	10-18318	—	—	—	—	—

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E042.1	8/5/10 17:27	UF	—	—	—	—	—	—	—	—	—	10-18695
E042.1	8/5/10 17:47	UF	—	—	—	—	—	—	—	—	—	10-18707
E042.1	8/5/10 18:07	UF	—	—	—	—	—	—	—	10-18282	—	10-18719
E042.1	8/5/10 18:08	UF	—	—	10-18330	—	10-18330	—	—	—	—	—
E042.1	8/5/10 18:27	UF	—	—	—	—	—	—	—	—	—	10-18731
E042.1	8/15/10 15:38	UF	—	—	—	—	—	—	—	—	—	10-18797
E042.1	8/15/10 15:41	UF	—	—	—	—	—	—	—	—	—	10-18805
E042.1	8/15/10 15:44	UF	—	—	—	—	—	—	—	—	—	10-18813
E042.1	8/15/10 15:47	UF	—	—	—	—	—	—	—	—	—	10-18821
E042.1	8/15/10 15:50	UF	—	—	—	—	—	10-18200	—	—	—	—
E042.1	8/15/10 15:53	UF	—	—	—	—	—	—	—	—	—	10-18829
E042.1	8/15/10 15:59	UF	—	—	—	—	—	—	—	—	—	10-18837
E042.1	8/15/10 16:02	UF	—	—	—	—	—	—	—	—	—	10-18845
E042.1	8/15/10 16:05	UF	—	—	—	—	—	—	—	—	—	10-18857
E042.1	8/15/10 16:08	UF	—	—	—	—	—	—	—	—	—	10-18865
E042.1	8/15/10 17:22	UF	—	—	—	—	—	—	—	10-18094	—	—
E042.1	8/15/10 17:23	UF	10-18130	—	10-18130	—	10-18130	—	—	—	—	—
E042.1	8/15/10 17:24	UF	—	—	—	—	—	—	—	—	10-18163	—
E042.1	8/15/10 17:26	UF	—	10-18171	—	—	—	—	—	—	—	—
E042.1	8/15/10 17:28	UF	—	—	—	—	—	—	—	—	—	10-18897
E042.1	8/15/10 17:48	UF	—	—	—	—	—	—	—	—	—	10-18905

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E042.1	8/15/10 18:08	UF	—	—	—	—	—	—	—	—	—	10-18913
E042.1	8/15/10 18:12	UF	—	—	10-18143	—	10-18143	—	—	10-18104	—	—
E042.1	8/15/10 18:28	UF	—	—	—	—	—	—	—	—	—	10-18921
E042.1	8/15/10 18:48	UF	—	—	—	—	—	—	—	—	—	10-18929
E042.1	8/15/10 18:57	UF	—	—	—	—	—	—	—	10-18112	—	—
E042.1	8/15/10 19:08	UF	—	—	—	—	—	—	—	—	—	10-18937
E042.1	8/15/10 19:28	UF	—	—	—	—	—	—	—	—	—	10-18945
E042.1	8/15/10 19:42	UF	—	—	10-18155	—	10-18155	—	—	10-18121	—	—
E042.1	8/15/10 19:48	UF	—	—	—	—	—	—	—	—	—	10-18953
E042.1	8/15/10 20:08	UF	—	—	—	—	—	—	—	—	—	10-18961
E042.1	8/15/10 20:28	UF	—	—	—	—	—	—	—	—	—	10-18969
E042.1	8/16/10 16:08	UF	—	—	—	—	—	—	—	—	—	10-18538
E042.1	8/16/10 16:14	UF	—	—	—	—	—	—	—	—	—	10-18562
E042.1	8/16/10 16:17	UF	—	—	—	—	—	—	—	—	—	10-18574
E042.1	8/16/10 16:18	UF	—	—	—	—	—	—	—	10-18232	—	—
E042.1	8/16/10 16:19	UF	10-18295	—	10-18295	—	10-18295	—	—	—	—	—
E042.1	8/16/10 16:20	UF	—	—	—	—	—	10-18401	—	—	10-18343	—
E042.1	8/16/10 16:21	UF	—	10-18355	—	—	—	—	—	—	—	—
E042.1	8/16/10 16:22	F	—	—	—	—	—	—	10-18373	—	—	—
E042.1	8/16/10 16:22	UF	—	—	—	—	—	—	10-18377	—	—	—
E042.1	8/16/10 16:23	UF	—	—	—	—	—	—	—	—	—	10-18600

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E042.1	8/16/10 16:29	UF	—	—	—	—	—	—	—	—	—	10-18612
E042.1	8/16/10 16:32	UF	—	—	—	—	—	—	—	—	—	10-18624
E042.1	8/16/10 16:35	UF	—	—	—	—	—	—	—	—	—	10-18636
E042.1	8/16/10 16:38	UF	—	—	—	—	—	—	—	—	—	10-18648
E042.1	8/16/10 17:08	UF	—	—	10-18307	—	10-18307	—	—	10-18253	—	—
E042.1	8/16/10 17:18	UF	—	—	—	—	—	—	—	—	—	10-18672
E042.1	8/16/10 17:38	UF	—	—	—	—	—	—	—	—	—	10-18684
E042.1	8/16/10 17:53	UF	—	—	10-18319	—	10-18319	—	—	10-18258	—	—
E042.1	8/16/10 17:58	UF	—	—	—	—	—	—	—	—	—	10-18696
E042.1	8/16/10 18:18	UF	—	—	—	—	—	—	—	—	—	10-18708
E042.1	8/16/10 18:38	UF	—	—	10-18331	—	10-18331	—	—	10-18283	—	10-18720
E042.1	8/16/10 18:58	UF	—	—	—	—	—	—	—	—	—	10-18732
E042.1	8/16/10 19:18	UF	—	—	—	—	—	—	—	—	—	10-18744
E042.1	8/16/10 19:38	UF	—	—	—	—	—	—	—	—	—	10-18756
E042.1	8/16/10 19:58	UF	—	—	—	—	—	—	—	—	—	10-18768
E042.1	8/16/10 20:58	UF	—	—	—	—	—	—	—	—	—	10-18792
E055	7/22/10 19:25	UF	—	—	—	—	—	—	—	—	—	10-17753
E055	7/22/10 19:26	UF	—	—	—	—	—	—	—	10-17804	—	—
E055	7/22/10 19:28	UF	—	—	—	—	10-17840	—	—	—	—	—
E055	7/22/10 19:29	UF	—	10-17816	—	—	—	—	—	—	—	—
E055	7/22/10 19:31	F	—	—	—	—	—	—	10-17619	—	—	—

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E055	7/22/10 19:31	UF	—	—	—	—	—	—	10-17623	—	—	—
E055	7/22/10 19:32	UF	—	—	—	10-17828 ^e	—	—	—	—	—	—
E055	7/22/10 19:33	UF	—	—	—	—	—	—	—	—	—	10-18272
E055	8/5/10 14:20	UF	—	—	—	—	—	—	—	—	—	10-17754
E055	8/5/10 14:21	UF	—	—	—	—	—	—	—	10-17805	—	—
E055	8/5/10 14:23	UF	—	—	—	—	10-17841	—	—	—	—	—
E055	8/5/10 14:24	UF	—	10-17817	—	—	—	—	—	—	—	—
E055	8/5/10 14:26	F	—	—	—	—	—	—	10-17620	—	—	—
E055	8/5/10 14:26	UF	—	—	—	—	—	—	10-17624	—	—	—
E055	8/5/10 14:27	UF	—	—	—	10-17829 ^e	—	—	—	—	—	—
E055	8/5/10 14:28	UF	—	—	—	—	—	—	—	—	—	10-18273
E055	8/15/10 17:24	UF	—	—	—	—	—	—	—	—	—	10-17755
E055	8/15/10 17:25	UF	—	—	—	—	—	—	—	10-17806	—	—
E055	8/15/10 17:27	UF	—	—	—	—	10-17842	—	—	—	—	—
E055	8/15/10 17:28	UF	—	10-17818	—	—	—	—	—	—	—	—
E055	8/15/10 17:30	F	—	—	—	—	—	—	10-17621	—	—	—
E055	8/15/10 17:30	UF	—	—	—	—	—	—	10-17625	—	—	—
E055	8/15/10 17:31	UF	—	—	—	10-17830 ^e	—	—	—	—	—	—
E055	8/15/10 17:32	UF	—	—	—	—	—	—	—	—	—	10-18274
E055.5	7/22/10 18:55	UF	—	—	—	—	—	—	—	—	—	10-17757
E055.5	7/22/10 18:56	UF	—	—	—	—	—	—	—	10-17808	—	—

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E055.5	7/22/10 18:58	UF	—	—	—	—	10-17844	—	—	—	—	—
E055.5	7/22/10 18:59	UF	—	10-17820	—	—	—	—	—	—	—	—
E055.5	7/22/10 19:02	F	—	—	—	—	—	—	10-17627	—	—	—
E055.5	7/22/10 19:02	UF	—	—	—	—	—	—	10-17631	—	—	—
E055.5	7/22/10 19:03	UF	—	—	—	10-17832 ^e	—	—	—	—	—	—
E055.5	7/22/10 19:04	UF	—	—	—	—	—	—	—	—	—	10-18276
E055.5	8/5/10 14:01	UF	—	—	—	—	—	—	—	—	—	10-17758
E055.5	8/5/10 14:02	UF	—	—	—	—	—	—	—	10-17809	—	—
E055.5	8/5/10 14:07	UF	—	—	—	—	10-17845	—	—	—	—	—
E055.5	8/5/10 14:08	UF	—	10-17821	—	—	—	—	—	—	—	—
E055.5	8/5/10 14:10	F	—	—	—	—	—	—	10-17628	—	—	—
E055.5	8/5/10 14:10	UF	—	—	—	—	—	—	10-17632	—	—	—
E055.5	8/5/10 14:12	UF	—	—	—	10-17833 ^e	—	—	—	—	—	—
E055.5	8/5/10 14:13	UF	—	—	—	—	—	—	—	—	—	10-18277
E055.5	8/15/10 17:06	UF	—	—	—	—	—	—	—	—	—	10-17759
E055.5	8/15/10 17:11	UF	—	—	—	—	10-17846	—	—	—	—	—
E055.5	8/15/10 17:12	UF	—	—	—	—	—	—	—	10-17810	—	—
E055.5	8/15/10 17:14	F	—	—	—	—	—	—	10-17629	—	—	—
E055.5	8/15/10 17:14	UF	—	—	—	—	—	—	10-17633	—	—	—
E055.5	8/15/10 17:15	UF	—	—	—	10-17834 ^e	—	—	—	—	—	—
E055.5	8/15/10 17:17	UF	—	—	—	—	—	—	—	—	—	10-18278

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E055.5	8/15/10 17:18	UF	—	10-17822	—	—	—	—	—	—	—	—
E055.5	8/23/10 15:06	UF	—	—	—	—	—	—	—	—	—	10-17760
E055.5	8/23/10 15:07	UF	—	—	—	—	—	—	—	10-17811	—	—
E055.5	8/23/10 15:10	UF	—	—	—	—	10-17847	—	—	—	—	—
E055.5	8/23/10 15:11	UF	—	10-17823	—	—	—	—	—	—	—	—
E055.5	8/23/10 15:13	F	—	—	—	—	—	—	10-17630	—	—	—
E055.5	8/23/10 15:13	UF	—	—	—	—	—	—	10-17634	—	—	—
E055.5	8/23/10 15:15	UF	—	—	—	10-17835 ^e	—	—	—	—	—	—
E055.5	8/23/10 15:16	UF	—	—	—	—	—	—	—	—	—	10-18279
E056	8/5/10 14:15	UF	—	—	—	—	—	—	—	—	—	10-17749
E056	8/5/10 14:16	UF	—	—	—	—	—	—	—	10-17800	—	—
E056	8/5/10 14:18	UF	—	—	—	—	10-17836	—	—	—	—	—
E056	8/5/10 14:19	UF	—	10-17812	—	—	—	—	—	—	—	—
E056	8/5/10 14:23	F	—	—	—	—	—	—	10-17611	—	—	—
E056	8/5/10 14:23	UF	—	—	—	—	—	—	10-17615	—	—	—
E056	8/5/10 14:24	UF	—	—	—	—	—	—	—	—	—	10-18465
E056	8/5/10 14:25	UF	—	—	—	10-17824 ^e	—	—	—	—	—	—
E056	8/15/10 16:24	UF	—	—	—	—	—	—	—	—	—	10-17750
E056	8/15/10 16:25	UF	—	—	—	—	—	—	—	10-17801	—	—
E056	8/15/10 16:27	UF	—	—	—	—	10-17837	—	—	—	—	—
E056	8/15/10 16:28	UF	—	10-17813	—	—	—	—	—	—	—	—

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E056	8/15/10 16:30	F	—	—	—	—	—	—	10-17612	—	—	—
E056	8/15/10 16:30	UF	—	—	—	—	—	—	10-17616	—	—	—
E056	8/15/10 16:31	UF	—	—	—	10-17825 ^e	—	—	—	—	—	—
E056	8/15/10 16:32	UF	—	—	—	—	—	—	—	—	—	10-18466
E056	9/22/10 17:43	UF	—	—	—	—	—	—	—	—	—	10-17751
E056	9/22/10 17:44	UF	—	—	—	—	—	—	—	10-17802	—	—
E056	9/22/10 17:46	UF	—	—	—	—	10-17838	—	—	—	—	—
E056	9/22/10 17:47	UF	—	10-17814	—	—	—	—	—	—	—	—
E056	9/22/10 17:49	F	—	—	—	—	—	—	10-17613	—	—	—
E056	9/22/10 17:49	UF	—	—	—	—	—	—	10-17617	—	—	—
E056	9/22/10 17:50	UF	—	—	—	10-17826 ^e	—	—	—	—	—	—
E056	9/22/10 17:51	UF	—	—	—	—	—	—	—	—	—	10-18467
E059	8/5/10 15:15	UF	—	—	—	—	—	—	—	—	—	10-25561
E059	8/5/10 15:18	UF	—	—	—	—	—	—	—	—	—	10-25544
E059	8/5/10 15:21	UF	—	—	—	—	—	—	—	—	—	10-25565
E059	8/5/10 15:24	UF	—	—	—	—	—	—	—	—	—	10-25555
E059	8/5/10 15:25	UF	—	—	—	—	—	—	—	10-25563	—	—
E059	8/5/10 15:26	UF	10-25542	—	10-25542	—	10-25542	—	—	—	—	—
E059	8/5/10 15:27	UF	—	—	—	—	—	10-25536	—	—	10-25546	—
E059	8/5/10 15:29	UF	—	10-25535	—	—	—	—	—	—	—	—
E059	8/5/10 15:30	UF	—	—	—	—	—	—	—	—	—	10-25557

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E059	8/5/10 15:36	UF	—	—	—	—	—	—	—	—	—	10-25534
E059	8/5/10 15:39	UF	—	—	—	—	—	—	—	—	—	10-25547
E059	8/5/10 15:42	UF	—	—	—	—	—	—	—	—	—	10-25539
E059	8/5/10 15:45	UF	—	—	—	—	—	—	—	—	—	10-25562
E059	8/5/10 16:05	UF	—	—	—	—	—	—	—	—	—	10-25568
E059	8/5/10 16:15	UF	—	—	10-25564	—	10-25564	—	—	10-25550	—	—
E059	8/5/10 16:25	UF	—	—	—	—	—	—	—	—	—	10-25567
E060.1	8/16/10 17:41	UF	—	—	—	—	—	—	—	—	—	10-18801
E060.1	8/16/10 17:44	UF	—	—	—	—	—	—	—	—	—	10-18809
E060.1	8/16/10 17:47	UF	—	—	—	—	—	—	—	—	—	10-18817
E060.1	8/16/10 17:50	UF	—	—	—	—	—	—	—	—	—	10-18825
E060.1	8/16/10 17:51	UF	—	—	—	—	—	—	—	10-18098	—	—
E060.1	8/16/10 17:52	UF	10-18134	—	10-18134	—	10-18134	—	—	—	—	—
E060.1	8/16/10 17:53	UF	—	—	—	—	—	—	—	—	10-18167	—
E060.1	8/16/10 17:54	UF	—	10-18175	—	—	—	—	—	—	—	—
E060.1	8/16/10 17:55	F	—	—	—	—	—	—	10-18188	—	—	—
E060.1	8/16/10 17:55	UF	—	—	—	—	—	10-18208	10-18192	—	—	—
E060.1	8/16/10 17:56	UF	—	—	—	—	—	—	—	—	—	10-18833
E060.1	8/16/10 18:41	UF	—	—	10-18139	—	10-18139	—	—	10-18108	—	—
E060.1	8/16/10 18:51	UF	—	—	—	—	—	—	—	—	—	10-18877
E060.1	8/16/10 19:11	UF	—	—	—	—	—	—	—	—	—	10-18885

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E060.1	8/16/10 19:31	UF	—	—	—	—	—	—	—	—	—	10-18893
E060.1	8/16/10 19:51	UF	—	—	—	—	—	—	—	—	—	10-18901
E060.1	8/16/10 20:11	UF	—	—	—	—	—	—	—	10-18125	—	10-18909
E060.1	8/16/10 20:12	UF	—	—	10-18159	—	10-18159	—	—	—	—	—
E060.1	8/16/10 20:31	UF	—	—	—	—	—	—	—	—	—	10-18917
E060.1	8/16/10 20:51	UF	—	—	—	—	—	—	—	—	—	10-18925
E060.1	8/16/10 21:11	UF	—	—	—	—	—	—	—	—	—	10-18933
E060.1	8/16/10 21:31	UF	—	—	—	—	—	—	—	—	—	10-18941
E060.1	8/16/10 21:51	UF	—	—	—	—	—	—	—	—	—	10-18949
E060.1	8/16/10 22:11	UF	—	—	—	—	—	—	—	—	—	10-18957
E060.1	8/16/10 22:31	UF	—	—	—	—	—	—	—	—	—	10-18965
E109.9	8/15/10 15:23	UF	—	—	—	—	—	—	—	—	—	10-18543
E109.9	8/15/10 15:25	UF	—	—	—	—	—	—	—	—	—	10-18551
E109.9	8/15/10 15:27	UF	—	—	—	—	—	—	—	—	—	10-18563
E109.9	8/15/10 15:29	UF	—	—	—	—	—	—	—	—	—	10-18575
E109.9	8/15/10 15:31	UF	—	—	—	—	—	—	—	—	—	10-18601
E109.9	8/15/10 15:33	F	10-18442	—	10-18442	—	10-18442	—	—	—	—	—
E109.9	8/15/10 15:35	UF	—	—	—	—	—	—	—	—	—	10-18613
E109.9	8/15/10 15:37	F	—	—	—	—	—	—	—	—	10-18461	—
E109.9	8/15/10 15:38	UF	—	—	—	—	—	—	—	10-18237	—	—
E109.9	8/15/10 15:39	UF	10-18296	—	10-18296	—	10-18296	—	—	—	—	10-18625

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E109.9	8/15/10 15:40	UF	—	—	—	—	—	—	—	—	10-18344	—
E109.9	8/15/10 15:41	UF	—	10-18356	—	—	—	10-18406	—	—	—	—
E109.9	8/15/10 15:42	F	—	—	—	—	—	—	10-18378	—	—	—
E109.9	8/15/10 15:42	UF	—	—	—	—	—	—	10-18382	—	—	—
E109.9	8/15/10 15:43	F	—	—	—	10-18426 ^e	—	—	—	—	—	—
E109.9	8/15/10 15:43	UF	—	—	—	10-18430 ^e	—	—	—	—	—	10-18637
E109.9	8/15/10 15:47	UF	—	—	—	—	—	—	—	—	—	10-18649
E109.9	8/15/10 15:49	F	—	—	—	—	—	10-18402	—	—	—	—
E109.9	8/15/10 15:51	UF	—	—	—	—	—	—	—	—	—	10-18661
E109.9	8/15/10 16:33	UF	—	—	—	—	—	—	—	—	—	10-18685
E109.9	8/15/10 16:53	UF	—	—	—	—	—	—	—	—	—	10-18697
E109.9	8/15/10 17:13	UF	—	—	—	—	—	—	—	10-18259	—	10-18709
E109.9	8/15/10 17:33	UF	—	—	—	—	—	—	—	—	—	10-18721
E109.9	8/15/10 17:53	UF	—	—	—	—	—	—	—	—	—	10-18733
E109.9	8/15/10 18:13	UF	—	—	—	—	—	—	—	—	—	10-18745
E109.9	8/15/10 18:33	UF	—	—	—	—	—	—	—	—	—	10-18757
E109.9	8/23/10 15:24	UF	—	—	—	—	—	—	—	—	—	10-18544
E109.9	8/23/10 15:27	UF	—	—	—	—	—	—	—	—	—	10-18552
E109.9	8/23/10 15:28	UF	—	—	—	—	—	—	—	—	—	10-18564
E109.9	8/23/10 15:30	UF	—	—	—	—	—	—	—	—	—	10-18576
E109.9	8/23/10 15:32	UF	—	—	—	—	—	—	—	—	—	10-18602

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E109.9	8/23/10 15:34	UF	10-18443	—	10-18443	—	10-18443	—	—	—	—	—
E109.9	8/23/10 15:36	UF	—	—	—	—	—	—	—	—	—	10-18614
E109.9	8/23/10 15:38	UF	—	—	—	—	—	—	—	—	10-18462	—
E109.9	8/23/10 15:40	UF	—	—	—	—	—	—	—	—	—	10-18626
E109.9	8/23/10 15:42	F	—	—	—	—	—	—	10-18379	—	—	—
E109.9	8/23/10 15:42	UF	—	—	—	—	—	—	10-18383	—	—	—
E109.9	8/23/10 15:44	UF	—	—	—	—	—	—	—	—	—	10-18638
E109.9	8/23/10 15:46	UF	—	—	—	10-18431 ^e	—	—	—	—	—	—
E109.9	8/23/10 15:48	UF	—	—	—	—	—	—	—	—	—	10-18650
E109.9	8/23/10 15:50	UF	—	—	—	—	—	10-18403	—	—	—	—
E109.9	8/23/10 15:54	UF	—	—	—	—	—	—	—	—	—	10-18662
E109.9	8/23/10 16:14	UF	—	—	—	—	—	—	—	—	—	10-18674
E109.9	8/23/10 17:54	UF	—	—	—	—	—	—	—	—	—	10-18734
E109.9	8/23/10 18:14	UF	—	—	—	—	—	—	—	—	—	10-18746
E109.9	9/22/10 17:37	UF	—	—	—	—	—	—	—	—	—	10-18545
E109.9	9/22/10 17:38	UF	—	—	—	—	—	—	—	10-18239	—	—
E109.9	9/22/10 17:39	F	10-18444	—	10-18444	—	10-18444	—	—	—	—	—
E109.9	9/22/10 17:40	UF	10-18298	—	10-18298	—	10-18298	—	—	—	—	—
E109.9	9/22/10 17:41	UF	—	—	—	—	—	—	—	—	10-18346	10-18565
E109.9	9/22/10 17:42	UF	—	10-18358	—	—	—	—	—	—	—	—
E109.9	9/22/10 17:43	UF	—	—	—	—	—	—	10-18384	—	—	—

Table 2.3-3 (continued)

Station	Collection Date	Field Prep	Americium-241	Dioxins and Furans	Gamma Spectroscopy & Isotopic Uranium	Gross Alpha and Gross Beta	Isotopic Plutonium	Isotopic Radium	Metals and Hardness	PCB Congeners	Strontium-90	Suspended Sediment
E109.9	9/22/10 17:45	UF	—	—	—	—	—	—	—	—	—	10-18603
E109.9	9/22/10 17:47	F	—	—	—	—	—	—	10-18380	—	—	—
E109.9	9/22/10 17:49	UF	—	—	—	—	—	—	—	—	—	10-18615
E109.9	9/22/10 17:51	F	—	—	—	—	—	—	—	—	10-18463	—
E109.9	9/22/10 17:53	UF	—	—	—	—	—	—	—	—	—	10-18627
E109.9	9/22/10 17:55	UF	—	—	—	—	—	10-18408	—	—	—	—
E109.9	9/22/10 17:57	UF	—	—	—	—	—	—	—	—	—	10-18639
E109.9	9/22/10 18:01	UF	—	—	—	—	—	—	—	—	—	10-18651
E109.9	9/22/10 18:03	F	—	—	—	—	—	10-18404	—	—	—	—
E109.9	9/22/10 18:05	UF	—	—	—	—	—	—	—	—	—	10-18663
E109.9	9/22/10 18:27	UF	—	—	—	—	—	—	—	—	—	10-18675
E109.9	9/22/10 18:28	UF	—	—	10-18310	—	10-18310	—	—	10-18244	—	—
E109.9	9/22/10 18:47	UF	—	—	—	—	—	—	—	—	—	10-18687
E109.9	9/22/10 19:07	UF	—	—	—	—	—	—	—	—	—	10-18699
E109.9	9/22/10 19:13	UF	—	—	10-18322	—	10-18322	—	—	10-18261	—	—
E109.9	9/22/10 19:27	UF	—	—	—	—	—	—	—	—	—	10-18711

^a UF = Unfiltered.^b — = Analysis not requested.^c Sample number (WTLAP- prefix not shown).^d F = Filtered.^e Gross beta analysis is not required.

Table 2.3-4
Sampling Sequence for Collection of Stormwater Samples at Upper Watershed Gages

Sample Bottle	E026, E030, E038, E039.1 & E040		E055, E055.5, & E056	
	Start Time (min) 12-Bottle ISCO	Analytical Suites	Start Time (min) 12-Bottle ISCO	Analytical Suites
1	10	Suspended sediment	10	Suspended sediment
2	11	PCB congener	11	PCB congener
3	12	PCB congener	12	PCB congener
4	13	Gamma spectroscopy; isotopic plutonium, and isotopic uranium	13	Isotopic plutonium
5	14	Strontium-90	14	Dioxins and furans
6	15	Dioxins and furans	15	Dioxins and furans
7	16	Dioxins and furans	16	TAL metals
8	17	TAL metals	17	Gross α
9	18	Gross alpha	18	Suspended sediment
10	19	Suspended sediment	19	Extra bottle
11	20	Extra bottle	20	Extra bottle
12	21	Extra bottle	21	Extra bottle

Table 2.3-5
Sampling Sequence for Collection of Stormwater Samples at Lower Watershed Gages

Sample Bottle	E042.1, E050.1, E059, & E060.1			
	Start Time (min) 12-Bottle ISCO	Analytical Suites 12-Bottle ISCO	Start Time (min) 24-Bottle ISCO	Analytical Suites 24-Bottle ISCO
1	10	PCB congener	0	Suspended sediment
2	11	Gamma spectroscopy; isotopic plutonium, americium-241, and isotopic uranium	3	Suspended sediment
3	12	Strontium-90	6	Suspended sediment
4	13	Dioxins and furans	9	Suspended sediment
5	14	TAL metals	12	Radium-226
6	15	Gross alpha and gross beta	15	Suspended sediment
7	60	PCB congener	18	Radium-228
8	61	Gamma spectroscopy; isotopic plutonium	21	Suspended sediment
9	105	PCB congener	24	Suspended sediment
10	106	Gamma spectroscopy; isotopic plutonium	27	Suspended sediment
11	150	PCB congener	30	Suspended sediment
12	151	Gamma spectroscopy and isotopic plutonium	50	Suspended sediment

Table 2.3-5 (continued)

Sample Bottle	E042.1, E050.1, E059, & E060.1			
	Start Time (min) 12-Bottle ISCO	Analytical Suites 12-Bottle ISCO	Start Time (min) 24-Bottle ISCO	Analytical Suites 24-Bottle ISCO
13	n/a*	n/a	70	Suspended sediment
14	n/a	n/a	90	Suspended sediment
15	n/a	n/a	110	Suspended sediment
16	n/a	n/a	130	Suspended sediment
17	n/a	n/a	150	Suspended sediment
18	n/a	n/a	170	Suspended sediment
19	n/a	n/a	190	Suspended sediment
20	n/a	n/a	210	Suspended sediment
21	n/a	n/a	230	Suspended sediment
22	n/a	n/a	250	Suspended sediment
23	n/a	n/a	270	Suspended sediment
24	n/a	n/a	290	Suspended sediment

*n/a = Not applicable.

Table 2.3-6
Sampling Sequence for Collection of Stormwater Samples at E109.9

Sample Bottle	E109.9			
	Start Time (min) 12-Bottle ISCO	Analytical Suites 12-Bottle ISCO	Start Time (min) 24-Bottle ISCO	Analytical Suites 24-Bottle ISCO
1	10	PCB congener	0	Suspended sediment
2	11	Gamma spectroscopy; isotopic plutonium, americium-241, and isotopic uranium	2	Suspended sediment
3	12	Strontium-90	4	Suspended sediment
4	13	Dioxins and furans	6	Suspended sediment
5	14	TAL metals	8	Suspended sediment
6	15	Gross alpha and gross beta	10	Gamma spectroscopy; isotopic plutonium, americium-241, and isotopic uranium
7	60	PCB congener	12	Suspended sediment
8	61	Gamma spectroscopy and isotopic plutonium	14	Strontium-90
9	105	PCB congener	16	Suspended sediment
10	106	Gamma spectroscopy and isotopic plutonium	18	Radium-226
11	150	PCB congener	20	Suspended sediment
12	151	Gamma spectroscopy and isotopic plutonium	22	Radium-228
13	n/a*	n/a	24	Suspended sediment
14	n/a	n/a	26	Radium-226
15	n/a	n/a	28	Suspended sediment
16	n/a	n/a	30	Radium-228
17	n/a	n/a	50	Suspended sediment
18	n/a	n/a	70	Suspended sediment
19	n/a	n/a	90	Suspended sediment
20	n/a	n/a	110	Suspended sediment
21	n/a	n/a	130	Suspended sediment
22	n/a	n/a	150	Suspended sediment
23	n/a	n/a	170	Suspended sediment
24	n/a	n/a	190	Suspended sediment

*n/a = Not applicable.

Table 2.5-1
Factors Contributing to Analytical Suite Prioritization

Upper Los Alamos Canyon Gages	Priority	Analytical Suite	Glass Bottle	Polyethylene Bottle	Minimum Volume Required (L)
E026, E030, E038, E039.1, E040	1	PCBs	Yes	No	1
	2	Gamma, Iso Pu, Iso U, Am-241*	Yes	Yes	1
	3	Strontium-90	Yes	Yes	1
	4	Dioxins/Furans	Yes	No	1
	5	TAL Metals + B + U (F/UF)	No	Yes	0.25/0.25
	6	Gross Alpha	Yes	Yes	0.25
	7	Cyanide*	Yes	Yes	0.25

Upper Pueblo Canyon Gages	Priority	Analytical Suite	Glass Bottle	Polyethylene Bottle	Minimum Volume Required (L)
E055, E055.5, E056	1	PCBs	Yes	No	1
	2	Iso Pu	Yes	Yes	1
	3	Dioxins/Furans	Yes	No	1
	4	TAL Metals + B + U (F/UF)	No	Yes	0.25/0.25
	5	Gross Alpha	Yes	Yes	0.25

Lower Watershed Gages	Priority	Analytical Suite	Glass Bottle	Polyethylene Bottle	Minimum Volume Required (L)
E042.1, E050.1, E059, E060.1, E109.9	1	PCBs	Yes	No	1
	2	Gamma, Iso Pu, Iso U, Am- 241	Yes	Yes	1
	3	Strontium-90	Yes	Yes	1
	4	Dioxins/Furans	Yes	No	1
	5	TAL Metals + B + U (F/UF)	No	Yes	0.25/0.25
	6	Gross Alpha/Gross Beta	Yes	Yes	0.25
	7	Radium-226/Radium-228	Yes	Yes	2
	8	Cyanide*	Yes	Yes	0.25

Table 2.5-1 (continued)

Retention Basin and Wetland below the SWMU 01-001(f) Drainage	Priority	Analytical Suite	Glass Bottle	Polyethylene Bottle	Minimum Volume Required (L)
CO111041, CO101038	1	TAL Metals + B + U (F/UF)	No	Yes	0.25/0.25
	2	PCBs	Yes	No	1
	3	Iso U	Yes	Yes	1
	4	Total organic carbon	Yes	Yes	0.04
	5	Gross Alpha/Gross Beta	Yes	Yes	0.25

Graduation Canyon below SWMU 00-019	Priority	Analytical Suite	Glass Bottle	Polyethylene Bottle	Minimum Volume Required (L)
C0115002	1	TAL Metals + B + U (F/UF)	No	Yes	0.25/0.25
	2	PCBs	Yes	No	1
	3	Iso U	Yes	Yes	1
	4	Total organic carbon	Yes	Yes	0.04
	5	Gross Alpha/Gross Beta	Yes	Yes	0.25

* Americium-241 and cyanide are analyzed in response to the Los Conchas Fire.

Table 3.1-1
Drainage Areas and Impermeable Surface Percentages

Canyon	Gage	Drainage to Gage (acres)	Impermeable Surface, %
Acid	E055.5	52.7	81
Acid	E056	237	70
Acid	Acid Canyon above E056	290	72
Pueblo	E055	2190	25
Pueblo	E059	1830	39
Pueblo	E060.1	1010	8
Pueblo	Pueblo Canyon above E060.1	5310	29
DP	E038	144	88
DP	E039.1	112	29
DP	E040	132	24
DP	DP Canyon above E039.1	256	62
DP	DP Canyon above E040	388	49
LA	E026	4530	2
LA	E030	960	30
LA	E042.1	601	12
LA	E050.1	195	11
LA	E109.9	25,800	8
LA	Los Alamos Canyon above E050.1	6680	10
LA	Los Alamos, Pueblo, Acid, DP and Guaje Canyons above E109.9	37,800	11
LA	Los Alamos Canyon between E050.1, E060.1, and E109.9	4810	19
Guaje	Guaje Canyon to confluence with LA Canyon	21,000	5

Table 3.1-2
Correlation Matrix between Cumulative Drainage Area and Suspended Sediment Concentration Statistics

Surface Type	Lower Quartile	Maximum	Median	Minimum	Upper Quartile
Total	0.87	0.91	0.86	0.56	0.84
Impermeable	0.88	0.93	0.89	0.63	0.90
Permeable	0.87	0.90	0.85	0.55	0.83

Table 3.2-1

Travel Time of Flood Bore, Peak Discharges, Increase or Decrease in Peak Discharge, and
Percent Increase/Decrease in Peak Discharge from Upstream to Downstream Stations for All 2010 Storm Events in Acid Canyon

Date	Travel Time from E055.5 to E056 (min)	Peaks (cfs)		+/- ^a	% ^a	Travel Time from E056 to E059 (min)	Peaks (cfs)		+/-	%	Travel Time from E056 to E060.1 (min)	Peaks (cfs)		+/-	%	Travel Time from E060.1 to E109.9 (min)	Peaks (cfs)		+/-	%
		E055.5	E056				E056	E059				E056	E060.1				E060.1	E109.9		
5/14	30	2	10	+	77	— ^b	10	na ^c	—	—	—	10	0	—	100	—	0	0.2	+	100
5/15	15	3	11	+	69	—	11	na	—	—	—	11	0	—	100	—	0	0.2	+	100
6/24	—	4	0	-	100	—	0	na	—	—	—	0	0	N	N	—	0	0	N	N
7/02	—	0	0	N	N	—	0	na	—	—	—	0	0	N	N	—	0	0	N	N
7/03	—	3	0	-	100	—	0	na	—	—	—	0	0	N	N	—	0	0	N	N
7/09	50	9	2	-	79	—	2	na	—	—	—	2	0	-	100	—	0	0	N	N
7/22	30	23	61	+	62	—	61	na	—	—	—	61	0	-	100	—	0	0	N	N
7/24	—	0	11	+	100	—	11	na	—	—	—	11	0	-	100	—	0	0	N	N
7/25	20	31	55	+	44	—	55	na	—	—	—	55	0	-	100	—	0	0	N	N
7/26	—	0	0	N	N	—	0	na	—	—	—	0	0	N	N	—	0	0	N	N
7/30	65	2	3	+	26	—	3	na	—	—	—	3	0	-	100	—	0	0	N	N
7/31	—	0	0	N	N	—	0	na	—	—	—	0	0	N	N	—	0	0	N	N
8/1	—	0	0	N	N	—	0	na	—	—	—	0	0	N	N	—	0	0	N	N
8/4	60	1	0	-	38	—	0	na	—	—	—	0	0	-	100	—	0	0	N	N
8/5	10	42	238	+	82	—	238	134 ^d	-	44	—	238	0	-	100	—	0	0	N	N
8/6	—	0	0	N	N	—	0	na	—	—	—	0	0	N	N	—	0	0	N	N
8/9	—	4	0	-	100	—	0	na	—	—	—	0	0	N	N	—	0	0	N	N
	80	2	0.5	-	70	—	0.5	na	—	—	—	0.5	0	-	100	—	0	0	N	N
8/15	20	5	28	+	82	-5	28	34	G	G	-20	28	1	G	G	45	1	439	+	100
	5	25	68	+	63	85	68	49	-	28	—	68	0	-	100	—	0	10	+	100
8/16	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N	—	0	243	+	100
	10	69	255	+	73	40	255	250	-	2	160	255	132	-	48	65	132	95	-	28
8/17	65	0.4	2	+	82	—	2	0	-	100	—	2	0	-	100	—	0	0	N	N

Table 3.2-1 (continued)

Date	Travel Time from E055.5 to E056 (min)	Peaks (cfs)		+/- ^a	%	Travel Time from E056 to E059 (min)	Peaks (cfs)		+/-	%	Travel Time from E056 to E060.1 (min)	Peaks (cfs)		+/-	%	Travel Time from E060.1 to E109.9 (min)	Peaks (cfs)		+/-	%
		E055.5	E056				E056	E059				E056	E060.1				E060.1	E109.9		
8/23	15	12	94	+	87	—	94	0	—	100	—	94	0	—	100	—	0	779 ^d	+	100
	10	25	80	+	69	115	80	46	—	43	—	80	0	—	100	—	0	0	N	N
9/08	—	1	0	—	100	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
9/22	15	12	30	+	59	—	30	0	—	100	—	30	0	—	100	—	0	48	+	100
10/05	—	2	0	—	100	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
10/20	55	2	8	+	71	—	8	0	—	100	—	8	0	—	100	—	0	0	N	N
	30	0	13	+	97	—	13	0	—	100	—	13	0	—	100	—	0	0	N	N
10/21	50	2	20	+	91	—	20	0	—	100	—	20	0	—	100	—	0	0	N	N
	20	2	21	+	89	—	21	0	—	100	—	21	0	—	100	—	0	0	N	N
Min	5	0.4	0.5	—	26	40	0.5	34	—	2	160	0.5	1	—	48	45	1	0.2	—	28
Mean	33	9	32	—	77	80	32	34	—	74	160	32	4	—	97	55	4	46	—	91
Max	80	69	255	—	100	115	255	250	—	100	160	255	132	—	100	65	132	779	—	100

^a + = Increase, — = decrease, N = no change in peak discharges, G = negative travel time (i.e., no transmission).

^b — = Result not obtained.

^c na = Discharge not available. E059 began monitoring discharge on August 15.

^d Flow is estimated.

Table 3.2-2

Travel Time of Flood Bore, Peak Discharges, Increase or Decrease in Peak Discharge, and
Percent Increase/Decrease in Peak Discharge from Upstream to Downstream Stations for All 2010 Storm Events in Pueblo Canyon

Date	Travel Time from E055 to E059 (min)	Peaks (cfs)		+/- ^a	% ^a	Travel Time from E055 to E060.1 (min)	Peaks (cfs)		+/-	%	Travel Time from E059 to E060.1 (min)	Peaks (cfs)		+/-	%
		E055	E059				E055	E060.1				E059	E060.1		
5/14	— ^b	4	na ^c	—	—	—	4	0	—	100	—	na	0	—	—
5/15	—	5	na	—	—	—	5	0	—	100	—	na	0	—	—
6/24	—	0	na	—	—	—	0	0	N	N	—	na	0	—	—
7/02	—	0	na	—	—	—	0	0	N	N	—	na	0	—	—
7/03	—	0	na	—	—	—	0	0	N	N	—	na	0	—	—
7/09	—	0	na	—	—	—	0	0	N	N	—	na	0	—	—
7/22	—	15	na	—	—	—	15	0	—	100	—	na	0	—	—
7/24	—	5	na	—	—	—	5	0	—	100	—	na	0	—	—
7/25	—	8	na	—	—	—	8	0	—	100	—	na	0	—	—
7/26	—	0	na	—	—	—	0	0	N	N	—	na	0	—	—
7/30	—	0.4	na	—	—	—	0.4	0	—	100	—	na	0	—	—
7/31	—	0.5	na	—	—	—	0.5	0	—	100	—	na	0	—	—
8/1	—	0	na ^b	—	—	—	0	0	N	N	—	na	0	—	—
8/4	—	0.1	na	—	—	—	0.1	0	—	100	—	na	0	—	—
8/5	—	33	134 ^d	+	76	—	33	0	—	100	—	134 ^d	0	—	100
8/6	—	0	na	—	—	—	0	0	N	N	—	na	0	—	—
8/9	—	1	na	—	—	—	1	0	—	100	—	na	0	—	—
	—	0	na	—	—	—	0	0	N	N	—	na	0	—	—
8/15	-35	4	34	G	G	-50	4	1	G	G	-15	34	1	G	G
	45	9	49	+	81	—	9	0	—	100	—	49	0	—	100
8/16	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
	30	41	250	+	84	150	41	132	+	69	120	250	132	—	47
8/17	—	3	0	—	100	—	3	0	-	100	—	0	0	N	N

Table 3.2-2 (continued)

Date	Travel Time from E055 to E059 (min)	Peaks (cfs)		+/- ^a	%	Travel Time from E055 to E060.1 (min)	Peaks (cfs)		+/- ^a	%	Travel Time from E059 to E060.1 (min)	Peaks (cfs)		+/- ^a	%
		E055	E059				E055	E060.1				E059	E060.1		
8/23	—	8	0	—	100	—	8	0	—	100	—	0	0	N	N
	95	14	46	+	68	—	14	0	—	100	—	46	0	—	100
9/08	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
9/22	—	3	0	—	100	—	3	0	—	100	—	0	0	N	N
10/05	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
10/20	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
10/21	—	1	0	—	100	—	1	0	—	100	—	0	0	N	N
	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
Min	30	0.1	34	—	68	150	0.1	1	—	69	120	34	1	—	47
Mean	57	5	34	—	89	150	5	4	—	98	120	34	4	—	87
Max	95	41	250	—	100	150	41	132	—	100	120	250	132	—	100

^a + = Increase, — = decrease, N = no change in peak discharges, G = negative travel time (i.e., no transmission).

^b — = Result not obtained.

^c na = Discharge not available. E059 began monitoring discharge on August 15.

^d Flow is estimated.

Table 3.2-3

Travel Time of Flood Bore, Peak Discharges, Increase or Decrease in Peak Discharge, and
Percent Increase/Decrease in Peak Discharge from Upstream to Downstream Stations for All 2010 Storm Events in DP Canyon

Date	Travel Time from E038 to E039.1 (min)	Peaks (cfs)		+/- ^a	% ^a	Travel Time from E039.1 to E040 (min)	Peaks (cfs)		+/-	%	Travel Time from E040 to E042.1 (min)	Peaks (cfs)		+/-	%	Travel Time from E042.1 to E050.1 (min)	Peaks (cfs)		+/-	%
		E038	E039.1				E039.1	E040				E040	E042.1				E042.1	E050.1		
5/14	55	74	23	-	69	75	23	4	-	84	30	4	2.2	-	40	— ^b	2.2	na ^c	—	—
	35	31	21	-	32	40	21	12	-	43	75	12	3.5	-	71	—	3.5	na	—	—
5/15	35	34	30	-	11	30	30	26	-	13	—	26	0	-	100	—	0	na	—	—
	30	32	41	+	23	20	41	33	-	20	50	33	14	-	58	—	14	na	—	—
6/24	45	38	2	-	95	—	2	0	-	100	—	0	0	N	N	—	0	na	—	—
7/02	60	13	0.4	-	97	—	0.4	0	-	100	—	0	0	N	N	—	0	na	—	—
7/03	45	38	4	-	90	—	4	0	-	100	—	0	0	N	N	—	0	na	—	—
	70	5	0.3	-	95	—	0.3	0	-	100	—	0	0	N	N	—	0	na	—	—
7/09	45	59	6	-	90	—	6	0	-	100	—	0	0	N	N	—	0	na	—	—
7/22	60	112	52	-	53	45	52	22	-	58	60	22	13	-	40	—	13	0	-	100
7/24	50	8	1	-	86	—	1	0	-	100	—	0	0	N	N	—	0	0	N	N
7/25	65	5	1	-	90	—	1	0	-	100	—	0	0	N	N	—	0	0	N	N
	40	42	16	-	61	45	16	5	-	68	145	5	11	+	54	—	11	0	-	100
7/26	—	0.4	0	-	100	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
7/30	40	58	54	-	7	30	54	37	-	32	80	37	6	-	84	—	6	0	-	100
7/31	60	7	2	-	77	100	2	1	-	17	—	1	0	-	100	—	0	0	N	N
8/1	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
8/4	50	29	4	-	86	—	4	0	-	100	—	0	0	N	N	—	0	0	N	N
8/5	15	186	276	+	33	25	276	209	-	25	50	209	48	-	77	45	48	20	-	58
8/6	—	2	0	-	100	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N

Table 3.2-3 (continued)

Date	Travel Time from E038 to E039.1 (min)	Peaks (cfs)		+/- ^a	%	Travel Time from E039.1 to E040 (min)	Peaks (cfs)		+/- ^a	%	Travel Time from E040 to E042.1 (min)	Peaks (cfs)		+/- ^a	%	Travel Time from E042.1 to E050.1 (min)	Peaks (cfs)		+/- ^a	%
		E038	E039.1				E039.1	E040				E040	E042.1				E042.1	E050.1		
8/9	35	63	16	—	74	55	16	10	—	37	—	10	0	—	100	—	0	0	N	N
	50	5	0.8	—	84	90	0.8	0.6	—	24	—	0.6	0	—	100	—	0	0	N	N
8/15	25	96	148	+	35	15	148	59	—	60	40	59	38	—	36	25	38	18	—	52
	20	156	197	+	21	20	197	86	—	57	40	86	54	—	37	20	54	31	—	43
8/16	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
	10	202	315	+	36	15	315	263	—	17	45	263	99	—	62	30	99	79	—	20
8/17	120	0.6	1.1	+	51	—	1.1	0	—	100	—	0	0	N	N	—	0	0	N	N
8/23	40	39	5	—	88	—	5	0	—	100	—	0	0	N	N	—	0	0	N	N
	25	160	151	—	6	25	151	31	—	79	60	31	19	—	38	—	19	0	—	100
9/08	55	47	2	—	96	—	2	0	—	100	—	0	0	N	N	—	0	0	N	N
9/22	30	48	26	—	45	25	26	0.1	—	100	35	0.1	0.1	+	43	—	0.1	0	—	100
	25	86	107	+	20	25	107	2	—	98	45	2	18	+	87	—	18	0	—	100
10/05	55	25	3	—	90	—	3	0	—	100	—	0	0	N	N	—	0	0	N	N
10/20	70	19	1	—	96	—	1	0	—	100	—	0	0	N	N	—	0	0	N	N
10/21	25	25	15	—	40	35	15	0.1	—	100	—	0.1	0	—	100	—	0	0	N	N
Min	10	0.4	0.3	—	6	15	0.3	0.1	—	13	30	0.1	0.1	—	36	20	0.1	18	—	20
Mean	45	50	43	—	63	40	43	23	—	72	58	23	9	—	68	30	9	6	—	77
Max	120	202	315	—	100	100	315	263	—	100	145	263	99	—	100	45	99	79	—	100

^a + = Increase, — = decrease, N = no change in peak discharges, G = negative travel time (i.e., no transmission).

^b — = Result not obtained.

^c na = Discharge not available. E050.1 began monitoring discharge on July 22.

Table 3.2-4

Travel Time of Flood Bore, Peak Discharges, Increase or Decrease in Peak Discharge, and
Percent Increase/Decrease in Peak Discharge from Upstream to Downstream Stations for All 2010 Storm Events in Los Alamos Canyon

Date	Travel Time from E026 to E030 (min)	Peaks (cfs)		+/- ^a	% ^a	Travel Time from E030 to E042.1 (min)	Peaks (cfs)		+/-	%	Travel Time from E042.1 to E050.1 (min)	Peaks (cfs)		+/-	%	Travel Time from E050.1 to E109.9 (min)	Peaks (cfs)		+/-	%
		E026	E030				E030	E042.1				E042.1	E050.1				E050.1	E109.9		
5/14	— ^b	1.5	2.1	+	29	70	2.1	2.2	+	6	—	2	na ^c	—	—	—	na	0.2	—	—
	110	1.8	3.3	+	47	50	3.3	3.5	+	4	—	3	na	—	—	—	na	0	—	—
5/15	95	2	5	+	59	—	5	0	—	100	—	0	na	—	—	—	na	0.2	—	—
	—	0	0	N	N	55	0	14	+	100	—	14	na	—	—	—	na	0	—	—
6/24	—	0	0	N	N	—	0	0	N	N	—	0	na	—	—	—	na	0	—	—
7/02	—	0	0	N	N	—	0	0	N	N	—	0	na	—	—	—	na	0	—	—
7/03	—	0	0	N	N	—	0	0	N	N	—	0	na	—	—	—	na	0	—	—
	—	0	0	N	N	—	0	0	N	N	—	0	na	—	—	—	na	0	—	—
7/09	—	0	0	N	N	—	0	0	N	N	—	0	na	—	—	—	na	0	—	—
7/22	100	0.2	7	+	98	75	7	13	+	48	—	13	0	—	100	—	0	0	N	N
7/24	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
7/25	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
	85	1	8	+	87	155	8	11	+	29	—	11	0	—	100	—	0	0	N	N
7/26	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
7/30	—	0	0	N	N	—	0	6	+	100	—	6	0	—	100	—	0	0	N	N
7/31	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
8/1	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
8/4	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
8/5	75	4	10	+	64	10	10	48	+	79	45	48	20	—	58	—	20	0	—	100
8/6	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N

Table 3.2-4 (continued)

Date	Travel Time from E026 to E030 (min)	Peaks (cfs)		+/- ^a	% ^a	Travel Time from E030 to E042.1 (min)	Peaks (cfs)		+/-	%	Travel Time from E042.1 to E050.1	Peaks (cfs)		+/-	%	Travel Time from E050.1 to E109.9 (min)	Peaks (cfs)		+/-	%
		E026	E030				E030	E042.1				E042.1	E050.1				E050.1	E109.9		
8/9	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
8/15	—	0	0	N	N	—	0	38	+	100	25	38	18	—	52	-65	18	439	G	G
	75	0.1	8	+	99	10	8	54	+	86	20	54	31	—	43	175	31	10	—	69
8/16	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N	—	0	243	+	100
	70	6	30	+	81	5	30	99	+	69	30	99	79	—	20	125	79	95	+	17
8/17	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
8/23	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N	—	0	779 ^d	+	100
	80	0.3	7	+	96	45	7	19	+	62	—	19	0	—	100	—	0	0	N	N
9/08	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
9/22	—	0	0	N	N	—	0	0.1	+	100	—	0.1	0	—	100	—	0	48	+	100
	—	0	3	+	100	-5	3	18	N	N	—	18	0	—	100	—	0	0	N	N
10/05	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
10/20	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
10/21	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N	—	0	0	N	N
Min	70	0.1	2.1	—	29	5	2.1	0.1	—	4	20	0.1	18	—	20	125	18	0.2	—	17
Mean	86	0	2	—	76	53	2	9	—	68	30	9	6	—	77	150	6	46	—	81
Max	110	6	30	—	100	155	30	99	—	100	45	99	79	—	100	175	79	779	—	100

^a + = Increase, - = decrease, N = no change in peak discharges, G = negative travel time (i.e., no transmission).

^b — = Result not obtained.

^c na = Discharge not available. E050.1 began monitoring discharge on July 22.

^d Flow is estimated.

Table 3.2-5
Summary of Peak Discharge Increases/Decreases in Acid and Pueblo Canyons

Summary	E055.5 to E056	E056 to E059	E056 to E060.1	E055 to E059	E055 to E060.1	E059 to E060.1	E060.1 to E109.9
No. of Increases	18	0	0	4	1	0	7
No. of Decreases	8	11	20	4	16	4	1
Mean Increase	74%	0%	0%	77%	69%	0	100%
Mean Decrease	86%	74%	97%	100%	100%	87%	28%

Table 3.2-6
Summary of Peak Discharge Increases/Decreases in DP and Los Alamos Canyons

Summary	E038 to E039.1	E039.1 to E040	E040 to E042.1	E026 to E030	E030 to E042.1	E042.1 to E050.1	E50.1 to E109.9
No. of Increases	7	0	3	10	12	0	4
No. of Decreases	26	31	15	0	1	10	2
Mean Increase	31%	0%	61%	76%	65%	0%	79%
Mean Decrease	72%	72%	708%	0%	100%	77%	84%

Table 3.2-7
**Pearson's Correlation Coefficients between Discharge and
Suspended Sediment for Each Station Sampled throughout the Storm Event**

Time Lag	E042.1						E060	E109.9	
	7/22	7/31	8/5	8/15 Part I	8/15 Part II	8/16	8/16	8/15	9/22
Q_t, SSC_t	0.82	0.73	0.71	0.90	0.67	0.56	0.42	-0.36	0.30
Q_t, SSC_{t-5}	0.91	0.89	0.83	-0.49	0.08	0.58	0.75	0.26	0.23
Q_t, SSC_{t-10}	0.93	0.94	0.84	-0.81	-0.16	0.55	0.93	0.34	-0.40
Q_t, SSC_{t-15}	0.95	0.94	0.86	-0.57	-0.08	0.44	0.96	0.26	-0.47
Q_t, SSC_{t-20}	0.95	0.95	0.88	-0.66	-0.26	0.24	0.95	0.12	-0.16
Q_t, SSC_{t-25}	0.94	0.97	0.88	-0.87	0.25	0.35	0.98	0.05	0.47
Q_t, SSC_{t-30}	0.96	0.97	0.90	-0.57	0.36	0.39	0.98	-0.40	0.97

Note: Maximum positive correlations are highlighted.

Table 3.2-8
Sediment Yield and Runoff Volume for Each Station Sampled throughout the Storm Event

Station	Date	Sediment Yield (kg)	Runoff Volume (ft ³)	Sediment Yield (tons)	Runoff Volume (acre-feet)
E042.1	7/22	3666	83118	4.0	1.9
E042.1	7/31	863	16761	1.0	0.4
E042.1	8/5	27893	186936	30.7	4.3
E042.1	8/15	27490	285316	30.3	6.5
E042.1	8/16	54382	453889	59.9	10.4
E060.1	8/16	69703	783166	76.8	18.0
E109.9	8/15	329509	1742127	363.2	40.0
E109.9	9/22	45576	111367	50.2	2.6

Table 4.0-1

NM Aquatic Acute, NM Human Health Persistent, NM Livestock Watering, and NM Wildlife Habitat Screening Levels

Analytical Suite ^a	Analyte Code	Analyte Name	Field Prep	NM Aqu Acute 2010 30 mg	NM HH Persistent 2010	NM Lvstk Wtr 2010	NM Wildf Hab 2010
DIOX/FUR	n/a ^b	Dioxin (TEQ)	UF	n/a	0.000000051	n/a	n/a
METALS	Al	Aluminum	F	658	n/a	n/a	n/a
METALS	Sb	Antimony	F	n/a	640	n/a	n/a
METALS	As	Arsenic	F	340	9	200	n/a
METALS	B	Boron	F	n/a	n/a	5000	n/a
METALS	Cd	Cadmium	F	0.59	n/a	50	n/a
METALS	Cr	Chromium	F	n/a	n/a	1000	n/a
METALS	Cr(III)	Chromium(III)	F	213	n/a		n/a
METALS	Co	Cobalt	F	n/a	n/a	1000	n/a
METALS	Cu	Copper	F	4.3	n/a	500	n/a
METALS	Pb	Lead	F	17	n/a	100	n/a
METALS	Mn	Manganese	F	2000	n/a	n/a	n/a
METALS	Hg	Mercury	F	1.4	n/a	n/a	n/a
METALS	Hg	Mercury	UF	n/a	n/a	10	0.77
METALS	Ni	Nickel	F	170	4600	n/a	n/a
METALS	Se	Selenium	F	n/a	4200	50	n/a
METALS	Se	Selenium	UF	20	n/a	n/a	5
METALS	Ag	Silver	F	0.41	n/a	n/a	n/a
METALS	Tl	Thallium	F	n/a	0.47	n/a	n/a
METALS	V	Vanadium	F	n/a	n/a	100	n/a
METALS	Zn	Zinc	F	54	26000	25000	n/a
PCB_CONG	1336-36-3	Total PCB	UF	n/a	0.00064	n/a	0.014
RAD	GROSSA	Gross alpha	UF	n/a	n/a	15	n/a
RAD	Radium-226	Radium-226	UF	n/a	n/a	30	n/a
RAD	Radium-228	Radium-228	UF	n/a	n/a	30	n/a

^a All units are micrograms per liter except for RAD, which are picocuries per liter.

^b n/a = Not applicable.

Table 4.0-2

Summary of Maximum Detected Results above Screening Levels at Los Alamos and Pueblo Canyons in Stormwater

Station Number	Collection Date	Aluminum	Antimony	Arsenic	Boron	Cadmium	Chromium	Cobalt	Copper	Gross alpha	Lead	Manganese	Mercury	Nickel	Radium-226	Radium-226 and Radium-228	Radium-228	Selenium	Silver	2,3,7,8-Tetrachlorodibenzodioxin	Thallium	Total PCB	Vanadium	Zinc
Screening Level ^a		660	640	9	5000	0.59	210	1000	4.3	15	17	2000	0.77	170	30	30	30	5	0.41	0.000000051	0.47	0.00064	100	54
E030	7/22/10	1530	— ^b	—	—	—	—	—	—	65.8	—	—	—	—	—	—	—	—	—	—	—	0.177	—	—
E030	8/15/10	—	—	—	—	—	—	—	—	221	—	—	—	—	—	—	—	—	—	—	—	1.16	—	—
E030	8/23/10	1080	—	—	—	—	—	—	—	110	—	—	—	—	—	—	—	—	—	—	—	1.14	—	—
E030	8/5/10	1890	—	—	—	—	—	—	—	160	—	—	0.85	—	—	—	—	—	—	—	—	0.903	—	—
E038	6/24/10	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.11	—	—
E038	7/22/10	—	—	—	—	1.1	—	—	—	55.2	—	—	—	—	—	—	—	—	—	—	—	0.0451	—	—
E038	7/30/10	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.57	0.0269	—	—
E038	7/9/10	684	—	—	—	—	—	—	—	24.9	—	—	—	—	—	—	—	—	—	—	—	0.0361	—	—
E039.1	7/21/10	—	—	—	—	—	—	—	—	16.4	—	—	—	—	—	—	—	—	—	—	—	—	—	246
E039.1	7/30/10	887	—	—	—	—	—	—	—	16.8	—	—	—	—	—	—	—	—	—	—	—	0.0323	—	—
E039.1	7/9/10	—	—	—	—	—	—	—	4.8	—	—	—	—	—	—	—	—	—	—	—	—	0.0277	—	—
E039.1	8/15/10	—	—	—	—	—	—	—	—	28.4	—	—	—	—	—	—	—	—	—	—	—	0.0445	—	—
E040	7/22/10	774	—	—	—	—	—	—	—	36.9	—	—	—	—	—	—	—	—	—	—	—	0.0416	—	—
E040	7/30/10	—	—	—	—	—	—	—	—	57.6	—	—	—	—	—	—	—	—	—	—	—	0.0532	—	—
E040	8/15/10	2290	—	—	—	—	—	—	—	97.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—
E040	8/23/10	—	—	—	—	—	—	—	—	25.5	—	—	—	—	—	—	—	—	—	—	—	0.0444	—	—
E042.1	7/22/10	2180	—	—	—	—	—	—	4.7	57.7	—	—	—	—	—	—	—	—	—	—	—	0.35	—	—
E042.1	7/23/10	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.112	—	—

Table 4.0-2 (continued)

Station Number	Collection Date	Aluminum	Antimony	Arsenic	Boron	Cadmium	Chromium	Cobalt	Copper	Gross alpha	Lead	Manganese	Mercury	Nickel	Radium-226	Radium-226 and Radium-228	Radium-228	Selenium	Silver	2,3,7,8-Tetrachlorodibenzodioxin	Thallium	Total PCB	Vanadium	Zinc
Screening Level ^a		660	640	9	5000	0.59	210	1000	4.3	15	17	2000	0.77	170	30	30	30	5	0.41	0.000000051	0.47	0.00064	100	54
E042.1	7/31/10	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.112	—	—
E042.1	8/15/10	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	1.39	—	—
E042.1	8/16/10	868	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	1.96	—	—
E042.1	8/5/10	—	—	—	—	—	—	—	—	86.6	—	—	—	—	—	—	—	—	—	—	—	0.556	—	—
E055	7/22/10	—	—	—	—	—	—	—	—	52.5	—	—	—	—	—	—	—	—	—	—	—	0.225	—	—
E055	8/15/10	756	—	—	—	—	—	—	—	17.3	—	—	—	—	—	—	—	—	—	—	—	0.132	—	—
E055	8/5/10	—	—	—	—	—	—	—	—	54.7	—	—	—	—	—	—	—	—	—	—	—	0.102	—	—
E055.5	7/22/10	1160	—	—	—	—	—	—	4.4	83	—	—	—	—	—	—	—	—	—	—	—	0.0574	—	—
E055.5	8/15/10	2020	—	—	—	—	—	—	4.4	36.9	—	—	—	—	—	—	—	—	—	—	—	0.0443	—	75.4
E055.5	8/23/10	2040	—	—	—	—	—	—	5.2	31.1	—	—	—	—	—	—	—	—	—	—	—	0.0284	—	—
E055.5	8/5/10	1000	—	—	—	—	—	—	—	192	—	—	1	—	—	—	—	—	—	—	—	0.0689	—	—
E056	8/15/10	1230	—	—	—	—	—	—	—	23.9	—	—	—	—	—	—	—	—	—	—	—	0.0563	—	—
E056	8/5/10	—	—	—	—	—	—	—	—	190	—	—	—	—	—	—	—	—	—	—	—	0.0581	—	—
E056	9/22/10	—	—	—	—	—	—	—	—	15.6	—	—	—	—	—	—	—	—	—	—	—	0.0266	—	—
E059	8/5/10	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.352	—	—
E060.1	8/16/10	671	—	—	—	—	—	—	6.7	—	—	—	—	—	—	—	—	—	—	—	—	0.221	—	—

Table 4.0-2 (continued)

Station Number	Collection Date	Aluminum	Antimony	Arsenic	Boron	Cadmium	Chromium	Cobalt	Copper	Gross alpha	Lead	Manganese	Mercury	Nickel	Radium-226	Radium-226 and Radium-228	Radium-228	Selenium	Silver	2,3,7,8-Tetrachlorodibenzodioxin	Thallium	Total PCB	Vanadium	Zinc
Screening Level ^a		660	640	9	5000	0.59	210	1000	4.3	15	17	2000	0.77	170	30	30	30	5	0.41	0.000000051	0.47	0.00064	100	54
E109.9	8/15/10	—	—	—	—	—	—	—	—	455	—	—	—	—	—	—	—	—	—	—	—	0.0726	—	—
E109.9	8/23/10	—	—	29.3	—	—	—	—	—	109	—	—	—	—	—	—	—	—	—	—	—	—	—	—
E109.9	9/22/10	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.0081	—	—

Note: All units are micrograms per liter except gross alpha and isotopic radium which are in picocurie per liter.

^a Hardness-dependent screening levels based on 30-mg/L hardness.

^b — = Result is not detected above screening level.

Table 4.2-1
Comparison of Filtered with Unfiltered Radionuclide Results

Analyte	Unfiltered Sample ID	Unfiltered Collection Date/Time	Filtered Sample ID	Filtered Collection Date/Time	Unfiltered Result (pCi/L)	Filtered Result (pCi/L)	RPD
Am-241	WTLAP-10-18296	8/15/10 15:39	WTLAP-10-18442	8/15/10 15:33	<0.124	0.133	n/a*
Am-241	WTLAP-10-18298	9/22/10 17:40	WTLAP-10-18444	9/22/10 17:39	<0.0969	<0.00867	n/a
Co-60	WTLAP-10-18296	8/15/10 15:39	WTLAP-10-18442	8/15/10 15:33	<1.25	<2.22	n/a
Co-60	WTLAP-10-18298	9/22/10 17:40	WTLAP-10-18444	9/22/10 17:39	<1.34	<-1.28	n/a
Cs-137	WTLAP-10-18296	8/15/10 15:39	WTLAP-10-18442	8/15/10 15:33	<0.255	<1.53	n/a
Cs-137	WTLAP-10-18298	9/22/10 17:40	WTLAP-10-18444	9/22/10 17:39	<1.49	<0.556	n/a
GROSSA	WTLAP-10-18430	8/15/10 15:43	WTLAP-10-18426	8/15/10 15:43	455	3.3	197%
GROSSB	WTLAP-10-18430	8/15/10 15:43	WTLAP-10-18426	8/15/10 15:43	719	<1.41	199%
Pu-238	WTLAP-10-18296	8/15/10 15:39	WTLAP-10-18442	8/15/10 15:33	<0.0442	<0.0483	n/a
Pu-238	WTLAP-10-18298	9/22/10 17:40	WTLAP-10-18444	9/22/10 17:39	<-0.0273	<0	n/a
Pu-239/240	WTLAP-10-18296	8/15/10 15:39	WTLAP-10-18442	8/15/10 15:33	0.331	0.772	-80%
Pu-239/240	WTLAP-10-18298	9/22/10 17:40	WTLAP-10-18444	9/22/10 17:39	1.61	<0.0135	197%
Ra-226	WTLAP-10-18406	8/15/10 15:41	WTLAP-10-18402	8/15/10 15:49	9.3	17.7	-62%
Ra-226	WTLAP-10-18408	9/22/10 17:55	WTLAP-10-18404	9/22/10 18:03	8.06	0.474	178%
Ra-228	WTLAP-10-18406	8/15/10 15:41	WTLAP-10-18402	8/15/10 15:49	12	18.6	-43%
Ra-228	WTLAP-10-18408	9/22/10 17:55	WTLAP-10-18404	9/22/10 18:03	5.81	<0.687	157%
Sr-90	WTLAP-10-18344	8/15/10 15:40	WTLAP-10-18461	8/15/10 15:37	0.767	0.836	-8%
Sr-90	WTLAP-10-18346	9/22/10 17:41	WTLAP-10-18463	9/22/10 17:51	<0.288	<0.219	n/a
U-234	WTLAP-10-18296	8/15/10 15:39	WTLAP-10-18442	8/15/10 15:33	18.9	19.4	-3%
U-234	WTLAP-10-18298	9/22/10 17:40	WTLAP-10-18444	9/22/10 17:39	18.2	0.668	1.85
U-235/236	WTLAP-10-18296	8/15/10 15:39	WTLAP-10-18442	8/15/10 15:33	1.45	1.49	-0.03
U-235/236	WTLAP-10-18298	9/22/10 17:40	WTLAP-10-18444	9/22/10 17:39	0.83	<0.0245	188%
U-238	WTLAP-10-18296	8/15/10 15:39	WTLAP-10-18442	8/15/10 15:33	20.4	19.9	2%
U-238	WTLAP-10-18298	9/22/10 17:40	WTLAP-10-18444	9/22/10 17:39	18.2	0.516	188%

* n/a = Not applicable.

Table 4.2-2
Comparison of Filtered with Unfiltered Inorganic Chemical Results

Analyte	Total Count	Unfiltered	Filtered	Count with >5x reduction	Count with >2x reduction	Average RPD	RPD StdDev
Aluminum	33	Detect	Detect	29	32	175%	0.36
Arsenic	1	ND*	ND	0	0	0.00	0
Arsenic	25	Detect	ND	8	19	103%	0.49
Arsenic	7	Detect	Detect	3	6	118%	0.74
Boron	4	ND	ND	0	0	0.00	0.00
Boron	3	Detect	ND	0	0	40%	0.25
Boron	26	Detect	Detect	0	3	41%	0.34
Barium	33	Detect	Detect	29	32	160%	0.35
Beryllium	1	ND	ND	0	0	0.00	0
Beryllium	21	Detect	ND	21	21	181%	0.17
Beryllium	11	Detect	Detect	10	11	179%	0.19
Calcium	33	Detect	Detect	3	17	79%	0.45
Cobalt	1	ND	ND	0	0	0.00	0
Cobalt	5	Detect	ND	4	5	137%	0.11
Cobalt	27	Detect	Detect	13	20	112%	0.63
Copper	1	ND	ND	0	0	-24%	0
Copper	3	Detect	ND	3	3	176%	0.04
Copper	29	Detect	Detect	26	29	165%	0.27
Iron	4	Detect	ND	4	4	196%	0.04
Iron	29	Detect	Detect	25	28	173%	0.37
Potassium	33	Detect	Detect	3	24	91%	0.41
Magnesium	33	Detect	Detect	21	31	133%	0.40
Manganese	1	Detect	ND	1	1	196%	0
Manganese	32	Detect	Detect	30	31	184%	0.36
Sodium	33	Detect	Detect	0	0	16%	0.12
Nickel	1	Detect	ND	1	1	181%	0
Nickel	32	Detect	Detect	27	31	160%	0.37
Lead	1	ND	ND	0	0	0.00	0
Lead	8	Detect	ND	8	8	195%	0.05
Lead	24	Detect	Detect	24	24	193%	0.08
Antimony	5	ND	ND	0	0	0.00	0.00
Antimony	1	ND	Detect	0	0	-117%	0
Antimony	3	Detect	ND	0	0	17%	0.10
Antimony	22	Detect	Detect	0	2	16%	0.32
Uranium	11	Detect	ND	11	11	184%	0.15
Uranium	22	Detect	Detect	20	21	166%	0.41
Vanadium	1	ND	ND	0	0	0.00	0
Vanadium	32	Detect	Detect	28	32	166%	0.26
Zinc	5	Detect	ND	5	5	194%	0.08
Zinc	28	Detect	Detect	26	27	173%	0.37

* ND = Not detected.

Table 4.3-1
Calculated Concentrations of Suspended Sediment and Instantaneous Discharge
Determined for Each Sample Collected During 2010 in the LA/P Watershed

Station	Sample Collection Date and Time	Field Prep	Sample ID	Calculated Instantaneous Discharge (cfs)	Calculated Suspended Sediment Concentration (mg/L)
E030	7/22/10 20:32	UF ^a	WTLAP-10-18004	7	3260
E030	7/22/10 20:32	UF	WTLAP-10-18022	7	3260
E030	7/22/10 20:34	UF	WTLAP-10-18054	7	3200
E030	7/22/10 20:35	UF	WTLAP-10-17988	7	3170
E030	7/22/10 20:36	UF	WTLAP-10-18038	7	3140
E030	7/22/10 20:38	F ^b	WTLAP-10-17932	7	3070
E030	7/22/10 20:38	UF	WTLAP-10-17936	7	3070
E030	7/22/10 20:39	UF	WTLAP-10-17972	7	3040
E030	7/22/10 20:40	UF	WTLAP-10-18070	6	3010
E030	8/5/10 15:13	UF	WTLAP-10-18023	8	5520
E030	8/5/10 15:14	UF	WTLAP-10-18005	8	5290
E030	8/5/10 15:16	UF	WTLAP-10-18055	8	4840
E030	8/5/10 15:17	UF	WTLAP-10-17989	8	4620
E030	8/5/10 15:18	UF	WTLAP-10-18039	9	4390
E030	8/5/10 15:20	F	WTLAP-10-17933	9	3940
E030	8/5/10 15:20	UF	WTLAP-10-17937	9	3940
E030	8/5/10 15:21	UF	WTLAP-10-17973	9	3720
E030	8/5/10 15:22	UF	WTLAP-10-18071	9	3490
E030	8/15/10 17:52	UF	WTLAP-10-18024	6	5570
E030	8/15/10 17:53	UF	WTLAP-10-18006	6	5940
E030	8/15/10 17:55	UF	WTLAP-10-18056	6	6670
E030	8/15/10 17:56	UF	WTLAP-10-17990	6	7040
E030	8/15/10 17:57	UF	WTLAP-10-18040	6	7410
E030	8/15/10 17:59	F	WTLAP-10-17934	6	8150
E030	8/15/10 17:59	UF	WTLAP-10-17938	6	8150
E030	8/15/10 18:00	UF	WTLAP-10-17974	6	8510
E030	8/15/10 18:02	UF	WTLAP-10-18072	6	9250
E030	8/23/10 20:17	UF	WTLAP-10-18025	7	2730
E030	8/23/10 20:18	UF	WTLAP-10-18007	7	2680
E030	8/23/10 20:20	UF	WTLAP-10-18057	7	2580
E030	8/23/10 20:21	UF	WTLAP-10-17991	7	2530
E030	8/23/10 20:22	UF	WTLAP-10-18041	6	2490
E030	8/23/10 20:24	F	WTLAP-10-17935	6	2390
E030	8/23/10 20:24	UF	WTLAP-10-17939	6	2390
E030	8/23/10 20:26	UF	WTLAP-10-17975	6	2290

Table 4.3-1 (continued)

Station	Sample Collection Date and Time	Field Prep	Sample ID	Calculated Instantaneous Discharge (cfs)	Calculated Suspended Sediment Concentration (mg/L)
E030	8/23/10 20:27	UF	WTLAP-10-18073	6	2240
E038	6/24/10 15:58	UF	WTLAP-10-18014	13	1720
E038	6/24/10 16:00	UF	WTLAP-10-18046	22	2570
E038	6/24/10 16:01	UF	WTLAP-10-17996	25	2990
E038	6/24/10 16:03	UF	WTLAP-10-17980	32	3840
E038	6/24/10 16:04	F	WTLAP-10-17924	35	4270
E038	6/24/10 16:04	UF	WTLAP-10-17928	35	4270
E038	6/24/10 16:05	UF	WTLAP-10-18062	38	4690
E038	6/24/10 16:06	UF	WTLAP-10-18030	35	5110
E038	7/9/10 20:55	UF	WTLAP-10-18015	33	960
E038	7/9/10 20:56	UF	WTLAP-10-17997	30	922
E038	7/9/10 20:58	UF	WTLAP-10-18047	23	845
E038	7/9/10 21:00	UF	WTLAP-10-17981	16	769
E038	7/9/10 21:01	UF	WTLAP-10-18031	15	730
E038	7/9/10 21:03	F	WTLAP-10-17925	12	654
E038	7/9/10 21:03	UF	WTLAP-10-17929	12	654
E038	7/9/10 21:04	UF	WTLAP-10-17965	10	615
E038	7/9/10 21:05	UF	WTLAP-10-18063	9	577
E038	7/22/10 19:06	UF	WTLAP-10-18016	68	922
E038	7/22/10 19:07	UF	WTLAP-10-17998	63	904
E038	7/22/10 19:09	UF	WTLAP-10-18048	53	868
E038	7/22/10 19:10	UF	WTLAP-10-17982	48	850
E038	7/22/10 19:12	UF	WTLAP-10-18032	42	815
E038	7/22/10 19:14	F	WTLAP-10-17926	35	779
E038	7/22/10 19:14	UF	WTLAP-10-17930	35	779
E038	7/22/10 19:15	UF	WTLAP-10-17966	32	761
E038	7/22/10 19:16	UF	WTLAP-10-18064	31	743
E038	7/30/10 22:20	UF	WTLAP-10-18017	50	610
E038	7/30/10 22:21	UF	WTLAP-10-17999	47	601
E038	7/30/10 22:24	UF	WTLAP-10-18049	35	575
E038	7/30/10 22:25	UF	WTLAP-10-17983	32	567
E038	7/30/10 22:26	UF	WTLAP-10-18033	30	558
E038	7/30/10 22:29	F	WTLAP-10-17927	26	532
E038	7/30/10 22:29	UF	WTLAP-10-17931	26	532
E038	7/30/10 22:30	UF	WTLAP-10-17967	24	524
E038	7/30/10 22:31	UF	WTLAP-10-18065	23	515
E038	10/20/10 18:11	UF	WTLAP-11-2317	<1	56

Table 4.3-1 (continued)

Station	Sample Collection Date and Time	Field Prep	Sample ID	Calculated Instantaneous Discharge (cfs)	Calculated Suspended Sediment Concentration (mg/L)
E038	10/20/10 18:12	UF	WTLAP-11-2320	<1	67.1
E038	10/20/10 18:13	UF	WTLAP-11-2322	<1	61.8
E038	10/20/10 18:14	UF	WTLAP-11-2324	<1	52.5
E038	10/20/10 18:15	UF	WTLAP-11-2328	<1	54
E038	10/20/10 18:17	UF	WTLAP-11-2330	<1	53
E038	10/20/10 18:18	UF	WTLAP-11-2331	<1	53
E038	10/20/10 18:19	UF	WTLAP-11-2332	<1	51
E038	10/20/10 18:20	UF	WTLAP-11-2334	<1	49
E038	10/20/10 18:21	UF	WTLAP-11-2336	<1	48
E039.1	7/9/10 21:40	UF	WTLAP-10-18018	5	603
E039.1	7/9/10 21:41	UF	WTLAP-10-18000	5	579
E039.1	7/9/10 21:43	UF	WTLAP-10-18050	5	530
E039.1	7/9/10 21:44	UF	WTLAP-10-17984	5	505
E039.1	7/9/10 21:45	UF	WTLAP-10-18034	5	481
E039.1	7/9/10 21:47	F	WTLAP-10-17940	4	432
E039.1	7/9/10 21:47	UF	WTLAP-10-17944	4	432
E039.1	7/9/10 21:48	UF	WTLAP-10-17968	4	407
E039.1	7/9/10 21:49	UF	WTLAP-10-18066	4	383
E039.1	7/30/10 22:49	UF	WTLAP-10-18020	47	819
E039.1	7/30/10 22:51	UF	WTLAP-10-18002	53	768
E039.1	7/30/10 22:54	UF	WTLAP-10-18052	54	692
E039.1	7/30/10 22:56	UF	WTLAP-10-17986	52	641
E039.1	7/30/10 22:57	UF	WTLAP-10-18036	50	616
E039.1	7/30/10 23:01	F	WTLAP-10-17942	40	514
E039.1	7/30/10 23:01	UF	WTLAP-10-17946	40	514
E039.1	7/30/10 23:02	UF	WTLAP-10-17970	38	489
E039.1	7/30/10 23:04	UF	WTLAP-10-18068	32	438
E039.1	8/15/10 16:07	UF	WTLAP-10-18021	80	1160
E039.1	8/15/10 16:09	UF	WTLAP-10-18003	84	1140
E039.1	8/15/10 16:12	UF	WTLAP-10-18053	80	1120
E039.1	8/15/10 16:14	UF	WTLAP-10-17987	74	1100
E039.1	8/15/10 16:15	UF	WTLAP-10-18037	72	1100
E039.1	8/15/10 16:19	F	WTLAP-10-17943	115	1060
E039.1	8/15/10 16:19	UF	WTLAP-10-17947	115	1060
E039.1	8/15/10 16:20	UF	WTLAP-10-17971	126	1060
E039.1	8/15/10 16:22	UF	WTLAP-10-18069	135	1040
E039.1	10/21/10 6:05	UF	WTLAP-11-2318	9	248

Table 4.3-1 (continued)

Station	Sample Collection Date and Time	Field Prep	Sample ID	Calculated Instantaneous Discharge (cfs)	Calculated Suspended Sediment Concentration (mg/L)
E039.1	10/21/10 6:07	UF	WTLAP-11-2319	9	243
E039.1	10/21/10 6:08	UF	WTLAP-11-2321	9	225
E039.1	10/21/10 6:10	UF	WTLAP-11-2323	10	217
E039.1	10/21/10 6:12	UF	WTLAP-11-2325	10	211
E039.1	10/21/10 6:14	UF	WTLAP-11-2326	10	194
E039.1	10/21/10 6:15	UF	WTLAP-11-2327	10	189
E039.1	10/21/10 6:17	UF	WTLAP-11-2329	10	175
E039.1	10/21/10 6:19	UF	WTLAP-11-2333	10	172
E039.1	10/21/10 6:21	UF	WTLAP-11-2335	10	161
E040	7/22/10 20:45	UF	WTLAP-10-18010	22	2260
E040	7/22/10 20:46	UF	WTLAP-10-17992	22	2200
E040	7/22/10 20:48	UF	WTLAP-10-18042	21	2070
E040	7/22/10 20:49	UF	WTLAP-10-17976	21	2010
E040	7/22/10 20:50	UF	WTLAP-10-18026	20	1950
E040	7/22/10 20:53	F	WTLAP-10-17916	19	1760
E040	7/22/10 20:53	UF	WTLAP-10-17920	19	1760
E040	7/22/10 20:54	UF	WTLAP-10-17960	18	1690
E040	7/22/10 20:55	UF	WTLAP-10-18058	18	1630
E040	7/30/10 23:28	UF	WTLAP-10-18011	36	2730
E040	7/30/10 23:29	UF	WTLAP-10-17993	36	2610
E040	7/30/10 23:32	UF	WTLAP-10-18043	33	2250
E040	7/30/10 23:33	UF	WTLAP-10-17977	32	2130
E040	7/30/10 23:35	UF	WTLAP-10-18027	29	1890
E040	7/30/10 23:37	F	WTLAP-10-17917	29	1650
E040	7/30/10 23:37	UF	WTLAP-10-17921	29	1650
E040	7/30/10 23:38	UF	WTLAP-10-17961	28	1530
E040	7/30/10 23:39	UF	WTLAP-10-18059	28	1410
E040	8/15/10 16:08	UF	WTLAP-10-18012	4	3320
E040	8/15/10 16:12	UF	WTLAP-10-17962	3	2730
E040	8/15/10 16:14	UF	WTLAP-10-17922	3	2440
E040	8/15/10 16:16	F	WTLAP-10-17918	2	2150
E040	8/15/10 16:23	UF	WTLAP-10-18060	2	1120
E040	8/23/10 20:02	UF	WTLAP-10-18013	31	1880
E040	8/23/10 20:03	UF	WTLAP-10-17995	30	1840
E040	8/23/10 20:06	UF	WTLAP-10-17963	29	1710
E040	8/23/10 20:20	UF	WTLAP-10-18061	13	1100
E042.1	7/22/10 21:36	UF	WTLAP-10-18535	3	5690

Table 4.3-1 (continued)

Station	Sample Collection Date and Time	Field Prep	Sample ID	Calculated Instantaneous Discharge (cfs)	Calculated Suspended Sediment Concentration (mg/L)
E042.1	7/22/10 21:39	UF	WTLAP-10-18547	10	4970
E042.1	7/22/10 21:42	UF	WTLAP-10-18559	13	4030
E042.1	7/22/10 21:45	UF	WTLAP-10-18571	13	3580
E042.1	7/22/10 21:46	UF	WTLAP-10-18229	13	3480
E042.1	7/22/10 21:47	UF	WTLAP-10-18292	12	3390
E042.1	7/22/10 21:48	UF	WTLAP-10-18340	12	3290
E042.1	7/22/10 21:48	UF	WTLAP-10-18398	12	3290
E042.1	7/22/10 21:49	UF	WTLAP-10-18352	11	3190
E042.1	7/22/10 21:50	F	WTLAP-10-18370	11	3100
E042.1	7/22/10 21:50	UF	WTLAP-10-18374	11	3100
E042.1	7/22/10 21:51	UF	WTLAP-10-18422	11	3000
E042.1	7/22/10 21:51	UF	WTLAP-10-18597	11	3000
E042.1	7/22/10 21:57	UF	WTLAP-10-18609	11	2420
E042.1	7/22/10 22:00	UF	WTLAP-10-18621	10	2270
E042.1	7/22/10 22:03	UF	WTLAP-10-18633	10	2490
E042.1	7/22/10 22:26	UF	WTLAP-10-18657	7	1500
E042.1	7/22/10 22:36	UF	WTLAP-10-18250	6	1320
E042.1	7/22/10 22:37	UF	WTLAP-10-18304	6	1300
E042.1	7/22/10 22:46	UF	WTLAP-10-18669	6	1130
E042.1	7/22/10 23:06	UF	WTLAP-10-18681	7	1100
E042.1	7/22/10 23:21	UF	WTLAP-10-18255	6	898
E042.1	7/22/10 23:22	UF	WTLAP-10-18316	6	884
E042.1	7/22/10 23:26	UF	WTLAP-10-18693	6	830
E042.1	7/22/10 23:46	UF	WTLAP-10-18705	5	600
E042.1	7/23/10 0:06	UF	WTLAP-10-18280	5	575
E042.1	7/23/10 0:06	UF	WTLAP-10-18717	5	575
E042.1	7/23/10 0:07	UF	WTLAP-10-18328	5	575
E042.1	7/23/10 0:26	UF	WTLAP-10-18729	5	565
E042.1	7/23/10 0:46	UF	WTLAP-10-18741	3	444
E042.1	7/23/10 1:06	UF	WTLAP-10-18753	3	386
E042.1	7/23/10 1:26	UF	WTLAP-10-18765	2	300
E042.1	7/23/10 1:46	UF	WTLAP-10-18773	<1	208
E042.1	7/23/10 2:06	UF	WTLAP-10-18781	<1	168
E042.1	7/23/10 2:26	UF	WTLAP-10-18789	<1	150
E042.1	7/31/10 0:39	UF	WTLAP-10-18536	<1	5000
E042.1	7/31/10 0:42	UF	WTLAP-10-18548	3	4640
E042.1	7/31/10 0:45	UF	WTLAP-10-18560	6	3580

Table 4.3-1 (continued)

Station	Sample Collection Date and Time	Field Prep	Sample ID	Calculated Instantaneous Discharge (cfs)	Calculated Suspended Sediment Concentration (mg/L)
E042.1	7/31/10 0:48	UF	WTLAP-10-18572	5	3560
E042.1	7/31/10 0:50	UF	WTLAP-10-18230	5	3210
E042.1	7/31/10 0:51	UF	WTLAP-10-18293	5	3040
E042.1	7/31/10 0:51	UF	WTLAP-10-18399	5	3040
E042.1	7/31/10 0:52	UF	WTLAP-10-18341	5	2870
E042.1	7/31/10 0:53	UF	WTLAP-10-18353	5	2690
E042.1	7/31/10 0:54	F	WTLAP-10-18371	5	2520
E042.1	7/31/10 0:54	UF	WTLAP-10-18375	5	2520
E042.1	7/31/10 0:54	UF	WTLAP-10-18598	5	2520
E042.1	7/31/10 1:00	UF	WTLAP-10-18610	4	1660
E042.1	7/31/10 1:03	UF	WTLAP-10-18622	4	1920
E042.1	7/31/10 1:06	UF	WTLAP-10-18634	4	1610
E042.1	7/31/10 1:09	UF	WTLAP-10-18646	4	1510
E042.1	7/31/10 1:29	UF	WTLAP-10-18658	2	1010
E042.1	7/31/10 1:40	UF	WTLAP-10-18251	1	863
E042.1	7/31/10 1:41	UF	WTLAP-10-18305	1	849
E042.1	7/31/10 1:49	UF	WTLAP-10-18670	1	742
E042.1	7/31/10 2:09	UF	WTLAP-10-18682	<1	545
E042.1	7/31/10 2:25	UF	WTLAP-10-18256	<1	442
E042.1	7/31/10 2:26	UF	WTLAP-10-18317	<1	435
E042.1	7/31/10 2:29	UF	WTLAP-10-18694	<1	416
E042.1	7/31/10 2:49	UF	WTLAP-10-18706	<1	318
E042.1	7/31/10 3:09	UF	WTLAP-10-18718	<1	265
E042.1	7/31/10 3:29	UF	WTLAP-10-18730	<1	223
E042.1	8/5/10 15:37	UF	WTLAP-10-18537	19	14000
E042.1	8/5/10 15:40	UF	WTLAP-10-18549	46	11200
E042.1	8/5/10 15:43	UF	WTLAP-10-18561	47	8330
E042.1	8/5/10 15:46	UF	WTLAP-10-18573	48	7280
E042.1	8/5/10 15:47	UF	WTLAP-10-18231	48	7400
E042.1	8/5/10 15:48	UF	WTLAP-10-18294	47	7520
E042.1	8/5/10 15:49	UF	WTLAP-10-18342	47	7640
E042.1	8/5/10 15:49	UF	WTLAP-10-18400	47	7640
E042.1	8/5/10 15:50	UF	WTLAP-10-18354	47	7760
E042.1	8/5/10 15:51	F	WTLAP-10-18372	47	7880
E042.1	8/5/10 15:51	UF	WTLAP-10-18376	47	7880
E042.1	8/5/10 15:52	UF	WTLAP-10-18424	47	8000
E042.1	8/5/10 15:52	UF	WTLAP-10-18599	47	8000

Table 4.3-1 (continued)

Station	Sample Collection Date and Time	Field Prep	Sample ID	Calculated Instantaneous Discharge (cfs)	Calculated Suspended Sediment Concentration (mg/L)
E042.1	8/5/10 15:58	UF	WTLAP-10-18611	45	5790
E042.1	8/5/10 16:01	UF	WTLAP-10-18623	44	5120
E042.1	8/5/10 16:04	UF	WTLAP-10-18635	43	5730
E042.1	8/5/10 16:07	UF	WTLAP-10-18647	42	3540
E042.1	8/5/10 16:27	UF	WTLAP-10-18659	25	4100
E042.1	8/5/10 16:37	UF	WTLAP-10-18252	20	3810
E042.1	8/5/10 16:38	UF	WTLAP-10-18306	19	3780
E042.1	8/5/10 16:47	UF	WTLAP-10-18671	16	3510
E042.1	8/5/10 17:07	UF	WTLAP-10-18683	9	2700
E042.1	8/5/10 17:22	UF	WTLAP-10-18257	7	2190
E042.1	8/5/10 17:23	UF	WTLAP-10-18318	7	2160
E042.1	8/5/10 17:27	UF	WTLAP-10-18695	7	2020
E042.1	8/5/10 17:47	UF	WTLAP-10-18707	4	1820
E042.1	8/5/10 18:07	UF	WTLAP-10-18282	3	1350
E042.1	8/5/10 18:07	UF	WTLAP-10-18719	3	1350
E042.1	8/5/10 18:08	UF	WTLAP-10-18330	3	1340
E042.1	8/5/10 18:27	UF	WTLAP-10-18731	2	1160
E042.1	8/15/10 15:38	UF	WTLAP-10-18797	<1	6280
E042.1	8/15/10 15:41	UF	WTLAP-10-18805	1	6450
E042.1	8/15/10 15:44	UF	WTLAP-10-18813	3	7660
E042.1	8/15/10 15:47	UF	WTLAP-10-18821	3	6880
E042.1	8/15/10 15:50	UF	WTLAP-10-18200	2	6420
E042.1	8/15/10 15:53	UF	WTLAP-10-18829	2	5950
E042.1	8/15/10 15:59	UF	WTLAP-10-18837	<1	5720
E042.1	8/15/10 16:02	UF	WTLAP-10-18845	<1	5330
E042.1	8/15/10 16:05	UF	WTLAP-10-18857	<1	3660
E042.1	8/15/10 16:08	UF	WTLAP-10-18865	<1	3810
E042.1	8/15/10 17:22	UF	WTLAP-10-18094	36	4590
E042.1	8/15/10 17:23	UF	WTLAP-10-18130	36	4600
E042.1	8/15/10 17:24	UF	WTLAP-10-18163	35	4610
E042.1	8/15/10 17:26	UF	WTLAP-10-18171	33	4630
E042.1	8/15/10 17:28	UF	WTLAP-10-18897	31	4650
E042.1	8/15/10 17:48	UF	WTLAP-10-18905	18	3450
E042.1	8/15/10 18:08	UF	WTLAP-10-18913	10	2440
E042.1	8/15/10 18:12	UF	WTLAP-10-18104	9	2820
E042.1	8/15/10 18:12	UF	WTLAP-10-18143	9	2820
E042.1	8/15/10 18:28	UF	WTLAP-10-18921	46	4330

Table 4.3-1 (continued)

Station	Sample Collection Date and Time	Field Prep	Sample ID	Calculated Instantaneous Discharge (cfs)	Calculated Suspended Sediment Concentration (mg/L)
E042.1	8/15/10 18:48	UF	WTLAP-10-18929	36	3940
E042.1	8/15/10 18:57	UF	WTLAP-10-18112	34	5080
E042.1	8/15/10 19:08	UF	WTLAP-10-18937	26	6480
E042.1	8/15/10 19:28	UF	WTLAP-10-18945	17	2840
E042.1	8/15/10 19:42	UF	WTLAP-10-18121	15	2320
E042.1	8/15/10 19:42	UF	WTLAP-10-18155	15	2320
E042.1	8/15/10 19:48	UF	WTLAP-10-18953	14	2090
E042.1	8/15/10 20:08	UF	WTLAP-10-18961	9	1860
E042.1	8/15/10 20:28	UF	WTLAP-10-18969	7	1320
E055	7/22/10 19:25	UF	WTLAP-10-17753	10	1270
E055	7/22/10 19:26	UF	WTLAP-10-17804	10	1300
E055	7/22/10 19:28	UF	WTLAP-10-17840	11	1360
E055	7/22/10 19:29	UF	WTLAP-10-17816	11	1400
E055	7/22/10 19:31	F	WTLAP-10-17619	12	1460
E055	7/22/10 19:31	UF	WTLAP-10-17623	12	1460
E055	7/22/10 19:32	UF	WTLAP-10-17828	13	1490
E055	7/22/10 19:33	UF	WTLAP-10-18272	13	1520
E055	8/5/10 14:20	UF	WTLAP-10-17754	33	3680
E055	8/5/10 14:21	UF	WTLAP-10-17805	33	3690
E055	8/5/10 14:23	UF	WTLAP-10-17841	33	3710
E055	8/5/10 14:24	UF	WTLAP-10-17817	33	3720
E055	8/5/10 14:26	F	WTLAP-10-17620	32	3730
E055	8/5/10 14:26	UF	WTLAP-10-17624	32	3730
E055	8/5/10 14:27	UF	WTLAP-10-17829	31	3740
E055	8/5/10 14:28	UF	WTLAP-10-18273	30	3750
E055	8/15/10 17:24	UF	WTLAP-10-17755	9	982
E055	8/15/10 17:25	UF	WTLAP-10-17806	9	920
E055	8/15/10 17:27	UF	WTLAP-10-17842	8	797
E055	8/15/10 17:28	UF	WTLAP-10-17818	8	735
E055	8/15/10 17:30	F	WTLAP-10-17621	8	612
E055	8/15/10 17:30	UF	WTLAP-10-17625	8	612
E055	8/15/10 17:31	UF	WTLAP-10-17830	8	550
E055	8/15/10 17:32	UF	WTLAP-10-18274	8	488
E055.5	7/22/10 18:55	UF	WTLAP-10-17757	18	590
E055.5	7/22/10 18:56	UF	WTLAP-10-17808	17	608
E055.5	7/22/10 18:58	UF	WTLAP-10-17844	15	643
E055.5	7/22/10 18:59	UF	WTLAP-10-17820	13	661

Table 4.3-1 (continued)

Station	Sample Collection Date and Time	Field Prep	Sample ID	Calculated Instantaneous Discharge (cfs)	Calculated Suspended Sediment Concentration (mg/L)
E055.5	7/22/10 19:02	F	WTLAP-10-17627	12	714
E055.5	7/22/10 19:02	UF	WTLAP-10-17631	12	714
E055.5	7/22/10 19:03	UF	WTLAP-10-17832	12	732
E055.5	7/22/10 19:04	UF	WTLAP-10-18276	11	750
E055.5	8/5/10 14:01	UF	WTLAP-10-17758	24	2290
E055.5	8/5/10 14:02	UF	WTLAP-10-17809	25	2360
E055.5	8/5/10 14:07	UF	WTLAP-10-17845	33	2690
E055.5	8/5/10 14:08	UF	WTLAP-10-17821	36	2760
E055.5	8/5/10 14:10	F	WTLAP-10-17628	42	2890
E055.5	8/5/10 14:10	UF	WTLAP-10-17632	42	2890
E055.5	8/5/10 14:12	UF	WTLAP-10-17833	36	3020
E055.5	8/5/10 14:13	UF	WTLAP-10-18277	33	3090
E055.5	8/15/10 17:06	UF	WTLAP-10-17759	23	198
E055.5	8/15/10 17:11	UF	WTLAP-10-17846	14	224
E055.5	8/15/10 17:12	UF	WTLAP-10-17810	13	230
E055.5	8/15/10 17:14	F	WTLAP-10-17629	12	240
E055.5	8/15/10 17:14	UF	WTLAP-10-17633	12	240
E055.5	8/15/10 17:15	UF	WTLAP-10-17834	11	245
E055.5	8/15/10 17:17	UF	WTLAP-10-18278	10	256
E055.5	8/15/10 17:18	UF	WTLAP-10-17822	10	261
E055.5	8/23/10 15:06	UF	WTLAP-10-17760	6	183
E055.5	8/23/10 15:07	UF	WTLAP-10-17811	5	185
E055.5	8/23/10 15:10	UF	WTLAP-10-17847	3	191
E055.5	8/23/10 15:11	UF	WTLAP-10-17823	3	193
E055.5	8/23/10 15:13	F	WTLAP-10-17630	2	196
E055.5	8/23/10 15:13	UF	WTLAP-10-17634	2	196
E055.5	8/23/10 15:15	UF	WTLAP-10-17835	2	200
E055.5	8/23/10 15:16	UF	WTLAP-10-18279	2	202
E056	8/5/10 14:15	UF	WTLAP-10-17749	112	2980
E056	8/5/10 14:16	UF	WTLAP-10-17800	137	3010
E056	8/5/10 14:18	UF	WTLAP-10-17836	188	3060
E056	8/5/10 14:19	UF	WTLAP-10-17812	213	3080
E056	8/5/10 14:23	F	WTLAP-10-17611	236	3180
E056	8/5/10 14:23	UF	WTLAP-10-17615	236	3180
E056	8/5/10 14:24	UF	WTLAP-10-18465	235	3210
E056	8/5/10 14:25	UF	WTLAP-10-17824	234	3240
E056	8/15/10 16:24	UF	WTLAP-10-17750	20	1040

Table 4.3-1 (continued)

Station	Sample Collection Date and Time	Field Prep	Sample ID	Calculated Instantaneous Discharge (cfs)	Calculated Suspended Sediment Concentration (mg/L)
E056	8/15/10 16:25	UF	WTLAP-10-17801	19	1010
E056	8/15/10 16:27	UF	WTLAP-10-17837	18	935
E056	8/15/10 16:28	UF	WTLAP-10-17813	17	900
E056	8/15/10 16:30	F	WTLAP-10-17612	16	830
E056	8/15/10 16:30	UF	WTLAP-10-17616	16	830
E056	8/15/10 16:31	UF	WTLAP-10-17825	15	795
E056	8/15/10 16:32	UF	WTLAP-10-18466	15	760
E056	9/22/10 17:43	UF	WTLAP-10-17751	26	863
E056	9/22/10 17:44	UF	WTLAP-10-17802	26	864
E056	9/22/10 17:46	UF	WTLAP-10-17838	24	866
E056	9/22/10 17:47	UF	WTLAP-10-17814	24	867
E056	9/22/10 17:49	F	WTLAP-10-17613	22	868
E056	9/22/10 17:49	UF	WTLAP-10-17617	22	868
E056	9/22/10 17:50	UF	WTLAP-10-17826	21	869
E056	9/22/10 17:51	UF	WTLAP-10-18467	21	870
E060.1	8/16/10 17:41	UF	WTLAP-10-18801	<1	9770
E060.1	8/16/10 17:44	UF	WTLAP-10-18809	<1	7500
E060.1	8/16/10 17:47	UF	WTLAP-10-18817	51	7750
E060.1	8/16/10 17:50	UF	WTLAP-10-18825	125	4640
E060.1	8/16/10 17:51	UF	WTLAP-10-18098	126	4420
E060.1	8/16/10 17:52	UF	WTLAP-10-18134	128	4200
E060.1	8/16/10 17:53	UF	WTLAP-10-18167	129	3980
E060.1	8/16/10 17:54	UF	WTLAP-10-18175	130	3760
E060.1	8/16/10 17:55	F	WTLAP-10-18188	132	3540
E060.1	8/16/10 17:55	UF	WTLAP-10-18192	132	3540
E060.1	8/16/10 17:55	UF	WTLAP-10-18208	132	3540
E060.1	8/16/10 17:56	UF	WTLAP-10-18833	129	3320
E060.1	8/16/10 18:41	UF	WTLAP-10-18108	82	3780
E060.1	8/16/10 18:41	UF	WTLAP-10-18139	82	3780
E060.1	8/16/10 18:51	UF	WTLAP-10-18877	74	3880
E060.1	8/16/10 19:11	UF	WTLAP-10-18885	57	1970
E060.1	8/16/10 19:31	UF	WTLAP-10-18893	44	1730
E060.1	8/16/10 19:51	UF	WTLAP-10-18901	35	1350
E060.1	8/16/10 20:11	UF	WTLAP-10-18125	26	1360
E060.1	8/16/10 20:11	UF	WTLAP-10-18909	26	1360
E060.1	8/16/10 20:12	UF	WTLAP-10-18159	26	1340
E060.1	8/16/10 20:31	UF	WTLAP-10-18917	21	886

Table 4.3-1 (continued)

Station	Sample Collection Date and Time	Field Prep	Sample ID	Calculated Instantaneous Discharge (cfs)	Calculated Suspended Sediment Concentration (mg/L)
E060.1	8/16/10 20:51	UF	WTLAP-10-18925	18	783
E060.1	8/16/10 21:31	UF	WTLAP-10-18941	12	597
E060.1	8/16/10 21:51	UF	WTLAP-10-18949	9	417
E060.1	8/16/10 22:11	UF	WTLAP-10-18957	8	309
E060.1	8/16/10 22:31	UF	WTLAP-10-18965	7	289
E109.9	8/15/10 15:23	UF	WTLAP-10-18543	<1	22900
E109.9	8/15/10 15:25	UF	WTLAP-10-18551	<1	23100
E109.9	8/15/10 15:27	UF	WTLAP-10-18563	8	14600
E109.9	8/15/10 15:29	UF	WTLAP-10-18575	17	18000
E109.9	8/15/10 15:31	UF	WTLAP-10-18601	19	11500
E109.9	8/15/10 15:33	F	WTLAP-10-18442	16	15400
E109.9	8/15/10 15:35	UF	WTLAP-10-18613	12	19300
E109.9	8/15/10 15:37	F	WTLAP-10-18461	10	17500
E109.9	8/15/10 15:38	UF	WTLAP-10-18237	9	16500
E109.9	8/15/10 15:39	UF	WTLAP-10-18296	8	15600
E109.9	8/15/10 15:39	UF	WTLAP-10-18625	8	15600
E109.9	8/15/10 15:40	UF	WTLAP-10-18344	6	16700
E109.9	8/15/10 15:41	UF	WTLAP-10-18356	6	17800
E109.9	8/15/10 15:41	UF	WTLAP-10-18406	6	17800
E109.9	8/15/10 15:42	F	WTLAP-10-18378	5	18800
E109.9	8/15/10 15:42	UF	WTLAP-10-18382	5	18800
E109.9	8/15/10 15:43	F	WTLAP-10-18426	5	19900
E109.9	8/15/10 15:43	UF	WTLAP-10-18430	5	19900
E109.9	8/15/10 15:43	UF	WTLAP-10-18637	5	19900
E109.9	8/15/10 15:47	UF	WTLAP-10-18649	4	17200
E109.9	8/15/10 15:49	F	WTLAP-10-18402	5	22900
E109.9	8/15/10 15:51	UF	WTLAP-10-18661	14	28500
E109.9	8/15/10 16:33	UF	WTLAP-10-18685	358	12600
E109.9	8/15/10 16:53	UF	WTLAP-10-18697	327	5910
E109.9	8/15/10 17:13	UF	WTLAP-10-18259	125	6970
E109.9	8/15/10 17:13	UF	WTLAP-10-18709	125	6970
E109.9	8/15/10 17:33	UF	WTLAP-10-18721	52	13600
E109.9	8/15/10 17:53	UF	WTLAP-10-18733	24	11300
E109.9	8/15/10 18:13	UF	WTLAP-10-18745	13	8980
E109.9	8/15/10 18:33	UF	WTLAP-10-18757	6	6230
E109.9	9/22/10 17:37	UF	WTLAP-10-18545	<1	10500
E109.9	9/22/10 17:38	UF	WTLAP-10-18239	<1	10900

Table 4.3-1 (continued)

Station	Sample Collection Date and Time	Field Prep	Sample ID	Calculated Instantaneous Discharge (cfs)	Calculated Suspended Sediment Concentration (mg/L)
E109.9	9/22/10 17:39	F	WTLAP-10-18444	<1	11200
E109.9	9/22/10 17:40	UF	WTLAP-10-18298	<1	11600
E109.9	9/22/10 17:41	UF	WTLAP-10-18346	<1	11900
E109.9	9/22/10 17:41	UF	WTLAP-10-18565	<1	11900
E109.9	9/22/10 17:42	UF	WTLAP-10-18358	<1	14000
E109.9	9/22/10 17:43	UF	WTLAP-10-18384	<1	16200
E109.9	9/22/10 17:45	UF	WTLAP-10-18603	<1	20400
E109.9	9/22/10 17:47	F	WTLAP-10-18380	1	20400
E109.9	9/22/10 17:49	UF	WTLAP-10-18615	2	20400
E109.9	9/22/10 17:51	F	WTLAP-10-18463	2	17400
E109.9	9/22/10 17:53	UF	WTLAP-10-18627	2	14300
E109.9	9/22/10 17:55	UF	WTLAP-10-18408	2	12400
E109.9	9/22/10 17:57	UF	WTLAP-10-18639	2	10500
E109.9	9/22/10 18:01	UF	WTLAP-10-18651	2	10200
E109.9	9/22/10 18:03	F	WTLAP-10-18404	2	9690
E109.9	9/22/10 18:05	UF	WTLAP-10-18663	2	9170
E109.9	9/22/10 18:27	UF	WTLAP-10-18675	35	23600
E109.9	9/22/10 18:28	UF	WTLAP-10-18244	40	22900
E109.9	9/22/10 18:28	UF	WTLAP-10-18310	40	22900
E109.9	9/22/10 18:47	UF	WTLAP-10-18687	43	10400
E109.9	9/22/10 19:07	UF	WTLAP-10-18699	7	13800
E109.9	9/22/10 19:13	UF	WTLAP-10-18261	4	11600
E109.9	9/22/10 19:13	UF	WTLAP-10-18322	4	11600
E109.9	9/22/10 19:27	UF	WTLAP-10-18711	2	6430

^a UF = Unfiltered.^b F = Filtered.

Table 4.4-1

Concentrations of Detected Inorganic Chemicals Normalized to Suspended Sediment Concentrations (Aluminum through Iron)

Station Number	Sample Collection Date and Time	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Cobalt	Chromium	Copper	Iron
Canyon Sediment Background		15400 ^a	3.98	0.83	127	1.41	0.4	4.73	10.5	11.2	13800
E030	7/22/10 20:38	4330	0.21	1.2	235	2.31	0.651	6.18	4.69	18.6	3520
E030	8/5/10 15:20	12600	0.24	3.22	282	1.78	0.736	9.39	10.8	32.5	23000
E030	8/15/10 17:59	2590	0.11	1.08	158	0.92	0.344	5.13	1.8	7.32	2010
E030	8/23/10 20:24	16600	0.31	4.02	302	2.09	0.587	8.63	13.1	22	15200
E038	6/24/10 16:04	5530	0.89	2.34	107	0.45	5.06	2.6	8.84	27.7	5910
E038	7/9/10 21:03	36400	2.6	7.19	390	2.45	4.28	10.6	27.4	64.3	28500
E038	7/22/10 19:14	22200	3.34	6.16	232	2.18	25.4	6.68	26.1	52.3	11300
E038	7/30/10 22:29	14800	1.32	3.57	188	1.32	0.545	6.2	12.8	33.3	12500
E039.1	7/9/10 21:47	55100	3.24	11.3	514	3.24	1.18	12.5	33.6	67.4	38700
E039.1	7/30/10 23:01	27200	1.58	6.81	278	1.85	0.622	8.36	20	39.1	20800
E039.1	8/15/10 16:19	5860	0.57	2.26	249	1.32	0.602	6.02	5.17	23.4	5800
E040	7/22/10 20:53	16400	0.57	3.47	198	2.28	0.473	5.3	11.6	22.2	12200
E040	7/30/10 23:37	18400	0.5	3.7	188	1.52	0.424	5.76	13.1	22.4	15200
E040	8/15/10 16:14	12600	0.25	2.66	121	1.35	0.451	3.32	7.83	12.3	11300
E042.1	7/22/10 21:50	15500	0.31	3.46	181	1.65	0.549	5.39	15.9	19.7	13500
E042.1	7/31/10 0:54	26400	0.48	5.79	248	1.98	0.794	8.45	20.5	30.6	22200
E042.1	8/5/10 15:51	13600	0.14	3.07	184	1.71	0.482	5.62	14.6	21.2	10500
E055	7/22/10 19:31	18500	0.56	4.8	331	1.72	1.1	10.8	16.9	36.4	27400
E055	8/5/10 14:26	19100	0.23	5.2	322	3.19	0.938	9.62	19.8	35.4	14000
E055	8/15/10 17:30	2960	— ^b	3.11	213	1.19	0.883	6.54	—	29.8	4090

Table 4.4-1 (continued)

Station Number	Sample Collection Date and Time	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Cobalt	Chromium	Copper	Iron
Canyon Sediment Background		15400	3.98	0.83	127	1.41	0.4	4.73	10.5	11.2	13800
E055.5	7/22/10 19:02	27000	0.91	5.32	287	2.8	1.08	8.54	22.1	38.5	19000
E055.5	8/5/10 14:10	21800	0.25	4.95	303	2.49	1.35	9.62	26.9	43.9	18200
E055.5	8/15/10 17:14	65800	—	14.6	541	5	1.92	12.1	49.1	70.8	52500
E055.5	8/23/10 15:13	50300	2.7	11.7	425	3.87	1.83	13.2	46.9	78.5	37800
E056	8/5/10 14:23	17900	0.2	4.18	233	1.85	1.07	7.47	18.5	33.3	10800
E056	8/15/10 16:30	5830	0.65	2.17	219	1.1	0.867	6.14	6.14	26.6	4830
E056	9/22/10 17:49	3640	—	2.53	228	0.91	0.645	5.99	3.8	18.4	3020
E060.1	8/16/10 17:55	40100	—	8.79	281	4.18	1.02	8.05	28.2	35.9	24100
E109.9	8/15/10 15:42	22700	—	1.82	310	1.65	0.244	9.19	13.4	16.1	13100
E109.9	8/23/10 15:42	29000	—	3.16	276	1.89	0.413	8.27	16.7	22.9	24400
E109.9	9/22/10 17:43	326	—	0.63	160	0.43	0.074	2.92	—	0.73	43.9

Note: All results are in milligrams per kilogram.

* — = Result is not detected.

Table 4.4-2

Concentrations of Detected Inorganic Chemicals Normalized to Suspended Sediment Concentrations (Lead through Zinc)

Station Number	Sample Collection Date and Time	Lead	Manganese	Mercury	Nickel	Selenium	Silver	Thallium	Uranium	Vanadium	Zinc
Canyon Sediment Background		19.7	543	0.1	9.38	0.3	1	0.73	2.22	19.7	60.2
E030	7/22/10 20:38	53.7	1310	—	6.77	—	—	—	1.99	14	180
E030	8/5/10 15:20	73.3	1170	0.216	10	0.3	0.13	—	0.96	34.8	241
E030	8/15/10 17:59	19.9	538	—	4.09	—	—	0.038	0.95	10.9	63.2
E030	8/23/10 20:24	59.9	1160	—	11.4	0.46	0.16	0.272	3.18	29.2	177
E038	6/24/10 16:04	21.9	263	—	6.87	—	0.19	—	0.87	11	212
E038	7/9/10 21:03	79.7	946	—	19.7	—	0.4	—	2.45	48	727
E038	7/22/10 19:14	71.8	601	—	17.1	—	0.73	—	1.93	23.8	439
E038	7/30/10 22:29	44.7	472	—	9.58	—	—	—	1.35	23.7	293
E039.1	7/9/10 21:47	89.1	1430	—	25.2	—	0.46	—	2.78	63	785
E039.1	7/30/10 23:01	57.8	642	—	14.6	—	—	—	1.56	38.7	303
E039.1	8/15/10 16:19	55.2	829	—	7.61	—	—	—	1.5	19.9	229
E040	7/22/10 20:53	42.7	655	—	9.34	—	0.13	—	1.08	22.6	198
E040	7/30/10 23:37	44.6	542	—	10.2	—	0.19	0.285	1.03	25.7	177
E040	8/15/10 16:14	36.5	377	—	6.84	—	0.14	0.189	1.19	18.5	87.7
E042.1	7/22/10 21:50	43.3	775	—	10.4	—	0.18	—	1.71	20.5	159
E042.1	7/31/10 0:54	63.1	913	—	15.6	—	0.31	—	2.02	36.2	254
E042.1	8/5/10 15:51	53.7	622	0.09	10.6	0.46	0.17	0.228	1.8	19.9	137
E055	7/22/10 19:31	133	1080	—	14.3	—	0.4	—	1.92	47.1	331
E055	8/5/10 14:26	113	2300	0.161	18.1	0.94	0.4	0.322	2.41	27.6	244
E055	8/15/10 17:30	128	890	—	6.87	—	—	—	1.21	18.8	242
E055.5	7/22/10 19:02	137	782	—	16.2	—	0.53	—	3.36	36.1	535
E055.5	8/5/10 14:10	161	837	0.346	20.4	0.76	1.52	0.381	5.09	36	278

Table 4.4-2 (continued)

Station Number	Sample Collection Date and Time	Lead	Manganese	Mercury	Nickel	Selenium	Silver	Thallium	Uranium	Vanadium	Zinc
		19.7 ^a	543	0.1	9.38	0.3	1	0.73	2.22	19.7	60.2
E055.5	8/15/10 17:14	202	1100	—	35	—	3.96	—	6.25	89.5	1210
E055.5	8/23/10 15:13	183	825	0.611	30.1	—	2.55	—	5.6	73.9	506
E056	8/5/10 14:23	102	675	—	15.9	0.66	0.6	0.239	2.61	24.7	218
E056	8/15/10 16:30	64.8	581	—	7.95	—	—	—	1.45	18.7	253
E056	9/22/10 17:49	47.6	526	—	6.1	—	—	—	1.38	15.7	190
E060.1	8/16/10 17:55	105	1190	—	23.9	0.9	2.01	0.791	3.42	35.3	184
E109.9	8/15/10 15:42	15.1	653	—	18.6	0.2	—	0.239	2.07	20.4	59
E109.9	8/23/10 15:42	19.4	619	—	19.4	—	0.12	0.27	1.7	36.2	79.8
E109.9	9/22/10 17:43	0.8	180	—	1.15	—	—	—	0.85	2.64	3.67

Note: All results are in milligrams per kilogram.

* — = Result is not detected.

Table 4.4-3
Concentrations of Radionuclides Normalized to Suspended Sediment Concentrations

Station Number	Sample Collection Date and Time	Americium-241	Cesium-137	Potassium-40	Plutonium-238	Plutonium-239/240	Radium-226	Radium-228	Strontium-90	Uranium-234	Uranium-238
Canyon Sediment Background		0.04	0.90	36.80	0.01	0.07	2.59	2.33	1.04	2.59	2.29
E030	7/22/10 20:34	NA ^a	Λ ^b	<	0.0819	2.96	NA	NA	NA	1.88	1.91
E030	7/22/10 20:35	NA	NA	NA	NA	NA	NA	NA	<	NA	NA
E030	8/5/10 15:16	NA	<	58.4	0.0491	3.10	NA	NA	NA	1.64	1.61
E030	8/5/10 15:17	NA	NA	NA	NA	NA	NA	NA	0.147	NA	NA
E030	8/15/10 17:55	NA	<	26.1	0.0244	0.809	NA	NA	NA	1.32	1.24
E030	8/15/10 17:56	NA	NA	NA	NA	NA	NA	NA	0.180	NA	NA
E030	8/23/10 20:20	NA	<	NA	0.0159	0.736	NA	NA	NA	1.14	1.20
E030	8/23/10 20:21	NA	NA	NA	NA	NA	NA	NA	<	NA	NA
E038	6/24/10 16:00	NA	<	<	<	0.0588	NA	NA	NA	1.52	1.46
E038	6/24/10 16:03	NA	NA	NA	NA	NA	NA	NA	<	NA	NA
E038	7/9/10 20:58	NA	<	<	<	<	NA	NA	NA	1.38	1.30
E038	7/9/10 21:00	NA	NA	NA	NA	NA	NA	NA	<	NA	NA
E038	7/22/10 19:09	NA	<	<	<	<	NA	NA	NA	1.79	1.66
E038	7/22/10 19:10	NA	NA	NA	NA	NA	NA	NA	<	NA	NA
E038	7/30/10 22:24	NA	<	<	<	<	NA	NA	NA	1.65	1.64
E038	7/30/10 22:25	NA	NA	NA	NA	NA	NA	NA	2.70	NA	NA
E039.1	7/9/10 21:43	NA	<	<	<	0.173	NA	NA	NA	1.67	1.93
E039.1	7/9/10 21:44	NA	NA	NA	NA	NA	NA	NA	16.8	NA	NA
E039.1	7/30/10 22:54	NA	<	<	0.266	4.00	NA	NA	NA	5.07	5.06
E039.1	7/30/10 22:56	NA	NA	NA	NA	NA	NA	NA	5.44	NA	NA
E039.1	8/15/10 16:12	NA	<	<	0.0271	0.455	NA	NA	NA	1.36	1.23
E039.1	8/15/10 16:14	NA	NA	NA	NA	NA	NA	NA	3.68	NA	NA
E040	7/22/10 20:48	NA	6.57	<	0.0715	0.599	NA	NA	NA	1.51	1.35
E040	7/22/10 20:49	NA	NA	NA	NA	NA	NA	NA	7.07	NA	NA
E040	7/30/10 23:32	NA	5.73	<	0.0769	0.564	NA	NA	NA	2.10	1.82
E040	7/30/10 23:33	NA	NA	NA	NA	NA	NA	NA	8.12	NA	NA
E042.1	7/22/10 21:47	0.614	2.57	66.7	0.125	2.60	NA	NA	NA	1.96	1.73
E042.1	7/22/10 21:48	NA	NA	NA	NA	NA	NA	NA	1.47	NA	NA
E042.1	7/22/10 21:48	NA	NA	NA	NA	NA	0.891	1.27	NA	NA	NA
E042.1	7/22/10 22:37	NA	NA	<	0.141	2.81	NA	NA	NA	NA	NA
E042.1	7/22/10 23:22	NA	<	<	0.0956	1.86	NA	NA	NA	NA	NA
E042.1	7/23/10 0:07	NA	<	<	0.0870	1.45	NA	NA	NA	NA	NA
E042.1	7/31/10 0:51	0.855	3.91	<	0.0806	0.901	NA	NA	NA	1.75	1.63

Table 4.4-3 (continued)

Station Number	Sample Collection Date and Time	Americium-241	Cesium-137	Potassium-40	Plutonium-238	Plutonium-239/240	Radium-226	Radium-228	Strontium-90	Uranium-234	Uranium-238
Canyon Sediment Background		0.04	0.90	36.80	0.01	0.07	2.59	2.33	1.04	2.59	2.29
E042.1	7/31/10 0:51	NA	NA	NA	NA	NA	0.743	3.68	NA	NA	NA
E042.1	7/31/10 0:52	NA	NA	NA	NA	NA	NA	NA	2.32	NA	NA
E042.1	7/31/10 1:41	NA	<	<	0.124	1.03	NA	NA	NA	NA	NA
E042.1	7/31/10 2:26	NA	9.83	<	<	0.880	NA	NA	NA	NA	NA
E042.1	8/5/10 15:48	0.702	1.4	<	0.131	0.926	NA	NA	NA	1.42	1.29
E042.1	8/5/10 15:49	NA	NA	NA	NA	NA	NA	NA	3.80	NA	NA
E042.1	8/5/10 15:49	NA	NA	NA	NA	NA	0.628	1.10	NA	NA	NA
E042.1	8/5/10 16:38	NA	1.67	<	0.0665	1.00	NA	NA	NA	NA	NA
E042.1	8/5/10 17:23	NA	12.4	58.9	0.322	2.79	NA	NA	NA	NA	NA
E042.1	8/5/10 18:08	NA	6.79	<	0.108	2.15	NA	NA	NA	NA	NA
E042.1	8/15/10 15:50	NA	NA	NA	NA	NA	0.691	1.12	NA	NA	NA
E042.1	8/15/10 17:23	0.692	2.98	34.6	0.0729	0.659	NA	NA	NA	2.20	2.10
E042.1	8/15/10 17:24	NA	NA	NA	NA	NA	NA	NA	4.60	NA	NA
E042.1	8/15/10 18:12	NA	NA	<	0.0311	1.90	NA	NA	NA	NA	NA
E042.1	8/15/10 19:42	NA	<	NA	0.0413	0.587	NA	NA	NA	NA	NA
E055	7/22/10 19:28	NA	NA	NA	<	<	NA	NA	NA	NA	NA
E055	8/5/10 14:23	NA	NA	NA	<	0.137	NA	NA	NA	NA	NA
E055	8/15/10 17:27	NA	NA	NA	<	<	NA	NA	NA	NA	NA
E055.5	7/22/10 18:58	NA	NA	NA	0.597	233	NA	NA	NA	NA	NA
E055.5	8/5/10 14:07	NA	NA	NA	<	25.2	NA	NA	NA	NA	NA
E055.5	8/15/10 17:11	NA	NA	NA	0.440	125	NA	NA	NA	NA	NA
E055.5	8/23/10 15:10	NA	NA	NA	<	69.8	NA	NA	NA	NA	NA
E056	8/5/10 14:18	NA	NA	NA	<	27.7	NA	NA	NA	NA	NA
E056	8/15/10 16:27	NA	NA	NA	0.0752	11.3	NA	NA	NA	NA	NA
E056	9/22/10 17:46	NA	NA	NA	<	14.9	NA	NA	NA	NA	NA
E059	8/5/10 15:26	0.280	<	10.5	<	3.46	NA	NA	NA	1.38	1.41
E059	8/5/10 15:27	NA	NA	NA	NA	NA	0.757	0.680	NA	NA	NA
E059	8/5/10 15:27	NA	NA	NA	NA	NA	NA	NA	0.417	NA	NA
E059	8/5/10 16:15	NA	<	32.0	0.0538	0.766	NA	NA	NA	NA	NA
E060.1	8/16/10 17:52	0.552	<	<	<	4.62	NA	NA	NA	1.32	1.10
E060.1	8/16/10 17:53	NA	NA	NA	NA	NA	NA	NA	0.354	NA	NA
E060.1	8/16/10 17:55	NA	NA	NA	NA	NA	1.99	2.64	NA	NA	NA
E060.1	8/16/10 18:41	NA	<	<	<	11.1	NA	NA	NA	NA	NA
E060.1	8/16/10 20:12	NA	<	<	<	14.5	NA	NA	NA	NA	NA

Table 4.4-3 (continued)

Station Number	Sample Collection Date and Time	Americium-241	Cesium-137	Potassium-40	Plutonium-238	Plutonium-239/240	Radium-226	Radium-228	Strontium-90	Uranium-234	Uranium-238
Canyon Sediment Background		0.04	0.90	36.80	0.01	0.07	2.59	2.33	1.04	2.59	2.29
E109.9	8/15/10 15:39	<	<	17.2	<	0.0212	NA	NA	NA	1.21	1.31
E109.9	8/15/10 15:40	NA	NA	NA	NA	NA	NA	NA	0.046	NA	NA
E109.9	8/15/10 15:41	NA	NA	NA	NA	NA	0.524	0.676	NA	NA	NA
E109.9	8/23/10 15:34	4.66	<	23.2	<	0.824	NA	NA	NA	1.06	1.19
E109.9	8/23/10 15:38	NA	NA	NA	NA	NA	NA	NA	0.174	NA	NA
E109.9	8/23/10 15:50	NA	NA	NA	NA	NA	0.390	0.626	NA	NA	NA
E109.9	9/22/10 17:40	<	<	27.3	<	0.139	NA	NA	NA	1.58	1.58
E109.9	9/22/10 17:41	NA	NA	NA	NA	NA	NA	NA	<	NA	NA
E109.9	9/22/10 17:55	NA	NA	NA	NA	NA	0.650	0.469	NA	NA	NA
E109.9	9/22/10 18:28	NA	<	8.76	<	0.0850	NA	NA	NA	NA	NA
E109.9	9/22/10 19:13	NA	<	36.2	<	0.135	NA	NA	NA	NA	NA

Note: All results are in picocuries per gram.

^a NA = Not analyzed.

^b < = Sample was analyzed but radionuclide was not detected.

Table 4.4-4
Concentrations of Total PCBs Normalized to Suspended Sediment Concentrations

Station Number	Sample Collection Date and Time	Sample ID	Normalized Total PCB (pg/g)
E030	7/22/2010 20:32	WTLAP-10-18004	54,300
E030	7/22/2010 20:32	WTLAP-10-18004	54,300
E030	8/5/2010 15:14	WTLAP-10-18005	171,000
E030	8/15/2010 17:53	WTLAP-10-18006	195,000
E030	8/23/2010 20:18	WTLAP-10-18007	425,000
E038	6/24/2010 16:01	WTLAP-10-17996	36,800
E038	7/9/2010 20:56	WTLAP-10-17997	39,200
E038	7/22/2010 19:07	WTLAP-10-17998	49,900
E038	7/30/2010 22:21	WTLAP-10-17999	44,700
E039.1	7/9/2010 21:41	WTLAP-10-18000	47,900
E038	6/24/2010 16:01	WTLAP-10-17996	36,800
E039.1	7/30/2010 22:51	WTLAP-10-18002	42,000
E039.1	8/15/2010 16:09	WTLAP-10-18003	38,900
E040	7/22/2010 20:46	WTLAP-10-17992	18,900
E040	7/30/2010 23:29	WTLAP-10-17993	20,400
E040	8/23/2010 20:03	WTLAP-10-17995	24,200
E042.1	7/22/2010 21:46	WTLAP-10-18229	100,000
E042.1	7/22/2010 22:36	WTLAP-10-18250	169,000
E042.1	7/22/2010 23:21	WTLAP-10-18255	185,000
E042.1	7/23/2010 00:06	WTLAP-10-18280	195,000
E042.1	7/31/2010 00:50	WTLAP-10-18230	34,900
E042.1	7/31/2010 01:40	WTLAP-10-18251	66,700
E042.1	7/31/2010 02:25	WTLAP-10-18256	88,300
E042.1	8/5/2010 15:47	WTLAP-10-18231	61,100
E042.1	8/5/2010 16:37	WTLAP-10-18252	146,000
E042.1	8/5/2010 17:22	WTLAP-10-18257	134,000
E042.1	8/5/2010 18:07	WTLAP-10-18282	167,000
E042.1	8/15/2010 17:22	WTLAP-10-18094	41,900
E042.1	8/15/2010 18:12	WTLAP-10-18104	53,900
E042.1	8/15/2010 18:57	WTLAP-10-18112	275,000
E042.1	8/15/2010 19:42	WTLAP-10-18121	225,000
E055	7/22/2010 19:26	WTLAP-10-17804	173,000
E055	8/5/2010 14:21	WTLAP-10-17805	27,700
E055	8/15/2010 17:25	WTLAP-10-17806	143,000
E055.5	7/22/2010 18:56	WTLAP-10-17808	94,400
E055.5	8/5/2010 14:02	WTLAP-10-17809	29,200

Table 4.4-4 (continued)

Station Number	Sample Collection Date and Time	Sample ID	Normalized Total PCB (pg/g)
E055.5	8/15/2010 17:12	WTLAP-10-17810	193,000
E055.5	8/23/2010 15:07	WTLAP-10-17811	154,000
E056	8/5/2010 14:16	WTLAP-10-17800	19,300
E056	8/15/2010 16:25	WTLAP-10-17801	56,000
E056	9/22/2010 17:44	WTLAP-10-17802	30,800
E059	8/5/2010 15:25	WTLAP-10-25563	25,000
E059	8/5/2010 16:15	WTLAP-10-25550	76,600
E060.1	8/16/2010 17:51	WTLAP-10-18098	50,000
E060.1	8/16/2010 18:41	WTLAP-10-18108	58,500
E060.1	8/16/2010 20:11	WTLAP-10-18125	57,500
E109.9	8/15/2010 15:38	WTLAP-10-18237	4,130
E109.9	8/15/2010 17:13	WTLAP-10-18259	10,400
E109.9	9/22/2010 17:38	WTLAP-10-18239	742
E109.9	9/22/2010 18:28	WTLAP-10-18244	541
E109.9	9/22/2010 19:13	WTLAP-10-18261	256

Note: All results are in picograms per gram.

Table 4.4-5
Analytical Results from the Retention Basins and Wetland below the
SWMU 01-001(f) Drainage Collected July 26, 2010

Sample Location	Analyte	Sample ID	Field Prep Code	Symbol Result	Result Unit of Measure
CO101040	Suspended sediment concentration	WTCAP-10-24689	UF	64.8	mg/L
CO101039	Suspended sediment concentration	WTCAP-10-24687	UF	16.2	mg/L
CO101038	Suspended sediment concentration	WTCAP-10-24681	UF	36.4	mg/L
CO101040	Calcium	WTCAP-10-24690	F	5.69	mg/L
CO101040	Calcium	WTCAP-10-24689	UF	6.06	mg/L
CO101039	Calcium	WTCAP-10-24688	F	31.6	mg/L
CO101039	Calcium	WTCAP-10-24687	UF	30.9	mg/L
CO101038	Calcium	WTCAP-10-24680	F	55.2	mg/L
CO101038	Calcium	WTCAP-10-24681	UF	54.7	mg/L
CO101040	Magnesium	WTCAP-10-24690	F	0.743	mg/L
CO101040	Magnesium	WTCAP-10-24689	UF	1.21	mg/L
CO101039	Magnesium	WTCAP-10-24688	F	5.34	mg/L
CO101039	Magnesium	WTCAP-10-24687	UF	5.48	mg/L
CO101038	Magnesium	WTCAP-10-24680	F	9.8	mg/L
CO101038	Magnesium	WTCAP-10-24681	UF	9.93	mg/L
CO101040	Potassium	WTCAP-10-24690	F	2.79	mg/L
CO101040	Potassium	WTCAP-10-24689	UF	3.55	mg/L
CO101039	Potassium	WTCAP-10-24688	F	5.53	mg/L
CO101039	Potassium	WTCAP-10-24687	UF	5.76	mg/L
CO101038	Potassium	WTCAP-10-24680	F	8.49	mg/L
CO101038	Potassium	WTCAP-10-24681	UF	8.59	mg/L
CO101040	Sodium	WTCAP-10-24690	F	7.73	mg/L
CO101040	Sodium	WTCAP-10-24689	UF	8.03	mg/L
CO101039	Sodium	WTCAP-10-24688	F	86.3	mg/L
CO101039	Sodium	WTCAP-10-24687	UF	84.7	mg/L
CO101038	Sodium	WTCAP-10-24680	F	151	mg/L
CO101038	Sodium	WTCAP-10-24681	UF	149	mg/L
CO101040	Hardness	WTCAP-10-24690	F	17.3	mg/L
CO101040	Hardness	WTCAP-10-24689	UF	20.1	mg/L
CO101039	Hardness	WTCAP-10-24688	F	101	mg/L
CO101039	Hardness	WTCAP-10-24687	UF	99.7	mg/L
CO101038	Hardness	WTCAP-10-24680	F	178	mg/L
CO101038	Hardness	WTCAP-10-24681	UF	178	mg/L
CO101040	Total organic carbon	WTCAP-10-24689	UF	9.73	mg/L
CO101039	Total organic carbon	WTCAP-10-24687	UF	9.37	mg/L

Table 4.4-4 (continued)

Sample Location	Analyte	Sample ID	Field Prep Code	Symbol Result	Result Unit of Measure
CO101038	Total organic carbon	WTCAP-10-24681	UF	10.1	mg/L
CO101040	Barium	WTCAP-10-24690	F	18.9	µg/L
CO101040	Barium	WTCAP-10-24689	UF	39	µg/L
CO101039	Barium	WTCAP-10-24688	F	57.5	µg/L
CO101039	Barium	WTCAP-10-24687	UF	67.2	µg/L
CO101038	Barium	WTCAP-10-24680	F	84.7	µg/L
CO101038	Barium	WTCAP-10-24681	UF	92.1	µg/L
CO101040	Boron	WTCAP-10-24690	F	<15	µg/L
CO101040	Boron	WTCAP-10-24689	UF	<15	µg/L
CO101039	Boron	WTCAP-10-24688	F	36.8	µg/L
CO101039	Boron	WTCAP-10-24687	UF	36.5	µg/L
CO101038	Boron	WTCAP-10-24680	F	56.3	µg/L
CO101038	Boron	WTCAP-10-24681	UF	56.2	µg/L
CO101040	Cobalt	WTCAP-10-24690	F	<2.9	µg/L
CO101040	Cobalt	WTCAP-10-24689	UF	<1	µg/L
CO101039	Cobalt	WTCAP-10-24688	F	<2.6	µg/L
CO101038	Cobalt	WTCAP-10-24680	F	<3.1	µg/L
CO101038	Cobalt	WTCAP-10-24681	UF	<1	µg/L
CO101040	Iron	WTCAP-10-24690	F	469	µg/L
CO101040	Iron	WTCAP-10-24689	UF	2520	µg/L
CO101039	Iron	WTCAP-10-24688	F	172	µg/L
CO101039	Iron	WTCAP-10-24687	UF	1470	µg/L
CO101038	Iron	WTCAP-10-24680	F	<102	µg/L
CO101038	Iron	WTCAP-10-24681	UF	1300	µg/L
CO101040	Manganese	WTCAP-10-24690	F	12.7	µg/L
CO101040	Manganese	WTCAP-10-24689	UF	61.5	µg/L
CO101039	Manganese	WTCAP-10-24688	F	23.8	µg/L
CO101039	Manganese	WTCAP-10-24687	UF	107	µg/L
CO101038	Manganese	WTCAP-10-24680	F	208	µg/L
CO101038	Manganese	WTCAP-10-24681	UF	289	µg/L
CO101040	Vanadium	WTCAP-10-24690	F	1.5	µg/L
CO101040	Vanadium	WTCAP-10-24689	UF	4.9	µg/L
CO101039	Vanadium	WTCAP-10-24688	F	5.2	µg/L
CO101039	Vanadium	WTCAP-10-24687	UF	7.6	µg/L
CO101038	Vanadium	WTCAP-10-24680	F	3.2	µg/L
CO101038	Vanadium	WTCAP-10-24681	UF	5.6	µg/L
CO101040	Zinc	WTCAP-10-24690	F	18.8	µg/L

Table 4.4-4 (continued)

Sample Location	Analyte	Sample ID	Field Prep Code	Symbol Result	Result Unit of Measure
CO101040	Zinc	WTCAP-10-24689	UF	48.3	µg/L
CO101039	Zinc	WTCAP-10-24688	F	5.4	µg/L
CO101039	Zinc	WTCAP-10-24687	UF	18	µg/L
CO101038	Zinc	WTCAP-10-24680	F	21	µg/L
CO101038	Zinc	WTCAP-10-24681	UF	36.9	µg/L
CO101040	Aluminum	WTCAP-10-24690	F	872	µg/L
CO101040	Aluminum	WTCAP-10-24689	UF	3970	µg/L
CO101039	Aluminum	WTCAP-10-24688	F	233	µg/L
CO101039	Aluminum	WTCAP-10-24687	UF	2260	µg/L
CO101038	Aluminum	WTCAP-10-24680	F	78.4	µg/L
CO101038	Aluminum	WTCAP-10-24681	UF	1410	µg/L
CO101040	Antimony	WTCAP-10-24690	F	1.5	µg/L
CO101040	Antimony	WTCAP-10-24689	UF	1.6	µg/L
CO101039	Antimony	WTCAP-10-24688	F	1.3	µg/L
CO101039	Antimony	WTCAP-10-24687	UF	1.1	µg/L
CO101038	Antimony	WTCAP-10-24680	F	0.83	µg/L
CO101038	Antimony	WTCAP-10-24681	UF	0.79	µg/L
CO101040	Arsenic	WTCAP-10-24690	F	<1.5	µg/L
CO101040	Arsenic	WTCAP-10-24689	UF	<1.5	µg/L
CO101039	Arsenic	WTCAP-10-24688	F	1.7	µg/L
CO101039	Arsenic	WTCAP-10-24687	UF	2.8	µg/L
CO101038	Arsenic	WTCAP-10-24680	F	<1.5	µg/L
CO101038	Arsenic	WTCAP-10-24681	UF	2.4	µg/L
CO101038	Antimony	WTCAP-10-24681	UF	0.79	µg/L
CO101040	Beryllium	WTCAP-10-24690	F	<0.1	µg/L
CO101040	Beryllium	WTCAP-10-24689	UF	0.29	µg/L
CO101039	Beryllium	WTCAP-10-24688	F	<0.1	µg/L
CO101039	Beryllium	WTCAP-10-24687	UF	0.14	µg/L
CO101038	Beryllium	WTCAP-10-24680	F	<0.1	µg/L
CO101038	Beryllium	WTCAP-10-24681	UF	0.11	µg/L
CO101040	Cadmium	WTCAP-10-24690	F	<0.11	µg/L
CO101040	Cadmium	WTCAP-10-24689	UF	0.11	µg/L
CO101039	Cadmium	WTCAP-10-24688	F	<0.11	µg/L
CO101039	Cadmium	WTCAP-10-24687	UF	<0.11	µg/L
CO101038	Cadmium	WTCAP-10-24680	F	<0.11	µg/L
CO101038	Cadmium	WTCAP-10-24681	UF	<0.11	µg/L
CO101040	Chromium	WTCAP-10-24690	F	<2.5	µg/L

Table 4.4-4 (continued)

Sample Location	Analyte	Sample ID	Field Prep Code	Symbol Result	Result Unit of Measure
CO101040	Chromium	WTCAP-10-24689	UF	3.2	µg/L
CO101039	Chromium	WTCAP-10-24688	F	<2.5	µg/L
CO101039	Chromium	WTCAP-10-24687	UF	<2.5	µg/L
CO101038	Chromium	WTCAP-10-24680	F	<2.5	µg/L
CO101038	Chromium	WTCAP-10-24681	UF	<2.5	µg/L
CO101040	Copper	WTCAP-10-24690	F	3.9	µg/L
CO101040	Copper	WTCAP-10-24689	UF	6.3	µg/L
CO101039	Copper	WTCAP-10-24688	F	3.4	µg/L
CO101039	Copper	WTCAP-10-24687	UF	5.4	µg/L
CO101038	Copper	WTCAP-10-24680	F	3.1	µg/L
CO101038	Copper	WTCAP-10-24681	UF	4.6	µg/L
CO101040	Lead	WTCAP-10-24690	F	0.96	µg/L
CO101040	Lead	WTCAP-10-24689	UF	7.6	µg/L
CO101039	Lead	WTCAP-10-24688	F	<0.5	µg/L
CO101039	Lead	WTCAP-10-24687	UF	2.5	µg/L
CO101038	Lead	WTCAP-10-24680	F	<0.5	µg/L
CO101038	Lead	WTCAP-10-24681	UF	1.6	µg/L
CO101040	Nickel	WTCAP-10-24690	F	1.4	µg/L
CO101040	Nickel	WTCAP-10-24689	UF	2.4	µg/L
CO101039	Nickel	WTCAP-10-24688	F	1.7	µg/L
CO101039	Nickel	WTCAP-10-24687	UF	2.3	µg/L
CO101038	Nickel	WTCAP-10-24680	F	2.4	µg/L
CO101040	Selenium	WTCAP-10-24690	F	<1	µg/L
CO101040	Selenium	WTCAP-10-24689	UF	<1	µg/L
CO101039	Selenium	WTCAP-10-24688	F	<1	µg/L
CO101039	Selenium	WTCAP-10-24687	UF	<1	µg/L
CO101038	Selenium	WTCAP-10-24680	F	<1	µg/L
CO101038	Selenium	WTCAP-10-24681	UF	<1	µg/L
CO101040	Silver	WTCAP-10-24690	F	<0.2	µg/L
CO101040	Silver	WTCAP-10-24689	UF	<0.2	µg/L
CO101039	Silver	WTCAP-10-24688	F	<0.2	µg/L
CO101039	Silver	WTCAP-10-24687	UF	<0.2	µg/L
CO101038	Silver	WTCAP-10-24680	F	<0.2	µg/L
CO101038	Silver	WTCAP-10-24681	UF	<0.2	µg/L
CO101040	Thallium	WTCAP-10-24690	F	<0.3	µg/L
CO101040	Thallium	WTCAP-10-24689	UF	<0.3	µg/L
CO101039	Thallium	WTCAP-10-24688	F	<0.3	µg/L

Table 4.4-4 (continued)

Sample Location	Analyte	Sample ID	Field Prep Code	Symbol Result	Result Unit of Measure
CO101039	Thallium	WTCAP-10-24687	UF	<0.3	µg/L
CO101038	Thallium	WTCAP-10-24680	F	<0.3	µg/L
CO101038	Thallium	WTCAP-10-24681	UF	<0.3	µg/L
CO101040	Uranium	WTCAP-10-24690	F	3.4	µg/L
CO101040	Uranium	WTCAP-10-24689	UF	9.8	µg/L
CO101039	Uranium	WTCAP-10-24688	F	9.5	µg/L
CO101039	Uranium	WTCAP-10-24687	UF	11.2	µg/L
CO101038	Uranium	WTCAP-10-24680	F	27.8	µg/L
CO101038	Uranium	WTCAP-10-24681	UF	30.1	µg/L
CO101040	Mercury	WTCAP-10-24690	F	<0.066	µg/L
CO101040	Mercury	WTCAP-10-24689	UF	<0.066	µg/L
CO101039	Mercury	WTCAP-10-24688	F	<0.066	µg/L
CO101039	Mercury	WTCAP-10-24687	UF	<0.066	µg/L
CO101038	Mercury	WTCAP-10-24680	F	<0.066	µg/L
CO101038	Mercury	WTCAP-10-24681	UF	< 0.066	µg/L
CO101040	Total PCB	WTCAP-10-24689	UF	15.1	µg/L
CO101039	Total PCB	WTCAP-10-24687	UF	1.01	µg/L
CO101038	Total PCB	WTCAP-10-24681	UF	0.545	µg/L
CO101040	Gross alpha	WTCAP-10-24689	UF	7.21	pCi/L
CO101039	Gross alpha	WTCAP-10-24687	UF	12.1	pCi/L
CO101038	Gross alpha	WTCAP-10-24681	UF	13.7	pCi/L
CO101040	Gross beta	WTCAP-10-24689	UF	5.97	pCi/L
CO101039	Gross beta	WTCAP-10-24687	UF	7.98	pCi/L
CO101038	Gross beta	WTCAP-10-24681	UF	17	pCi/L
CO101040	Uranium-234	WTCAP-10-24689	UF	2.69	pCi/L
CO101039	Uranium-234	WTCAP-10-24687	UF	3.72	pCi/L
CO101038	Uranium-234	WTCAP-10-24681	UF	10.1	pCi/L
CO101040	Uranium-235/236	WTCAP-10-24689	UF	0.167	pCi/L
CO101039	Uranium-235/236	WTCAP-10-24687	UF	0.237	pCi/L
CO101038	Uranium-235/236	WTCAP-10-24681	UF	0.673	pCi/L
CO101040	Uranium-238	WTCAP-10-24689	UF	3.07	pCi/L
CO101039	Uranium-238	WTCAP-10-24687	UF	3.24	pCi/L
CO101038	Uranium-238	WTCAP-10-24681	UF	9.48	pCi/L

Table 4.5-1
Dioxin/Furan Toxicity Equivalent Factors for the Dibenzodioxins and Dibenzofurans

Analyte Code	Analyte	TEF
1746-01-6	Tetrachlorodibenzodioxin[2,3,7,8-]	1
40321-76-4	Pentachlorodibenzodioxin[1,2,3,7,8-]	1
57653-85-7	Hexachlorodibenzodioxin[1,2,3,6,7,8-]	0.1
19408-74-3	Hexachlorodibenzodioxin[1,2,3,7,8,9-]	0.1
39227-28-6	Hexachlorodibenzodioxin[1,2,3,4,7,8-]	0.1
35822-46-9	Heptachlorodibenzodioxin[1,2,3,4,6,7,8-]	0.01
3268-87-9	Octachlorodibenzodioxin[1,2,3,4,6,7,8,9-]	0.0003
51207-31-9	Tetrachlorodibenzofuran[2,3,7,8-]	0.1
57117-41-6	Pentachlorodibenzofuran[1,2,3,7,8-]	0.03
57117-31-4	Pentachlorodibenzofuran[2,3,4,7,8-]	0.3
57117-44-9	Hexachlorodibenzofuran[1,2,3,6,7,8-]	0.1
72918-21-9	Hexachlorodibenzofuran[1,2,3,7,8,9-]	0.1
70648-26-9	Hexachlorodibenzofuran[1,2,3,4,7,8-]	0.1
60851-34-5	Hexachlorodibenzofuran[2,3,4,6,7,8-]	0.1
67562-39-4	Heptachlorodibenzofuran[1,2,3,4,6,7,8-]	0.01
55673-89-7	Heptachlorodibenzofuran[1,2,3,4,7,8,9-]	0.01
39001-02-0	Octachlorodibenzofuran[1,2,3,4,6,7,8,9-]	0.0003

Table 4.5-2
Sum of Dioxin/Furan Toxicity Equivalents Expressed as 2,3,7,8-TCDD Dioxin

Station Number	Collection Date Time	Sample ID	TEQ
E030	7/22/2010 8:36:00 PM	WTLAP-10-18038	0.0000121
E030	8/5/2010 3:18:00 PM	WTLAP-10-18039	0.00000586
E030	8/15/2010 5:57:00 PM	WTLAP-10-18040	0.00000508
E030	8/23/2010 8:22:00 PM	WTLAP-10-18041	0.00000498
E038	6/24/2010 4:01:00 PM	WTLAP-10-17996	0.000000136
E038	6/24/2010 4:06:00 PM	WTLAP-10-18030	0.000000112
E038	7/9/2010 9:01:00 PM	WTLAP-10-18031	0.000000908
E038	7/22/2010 7:12:00 PM	WTLAP-10-18032	0.000000896
E038	7/30/2010 10:26:00 PM	WTLAP-10-18033	0.00000172
E039.1	7/9/2010 9:45:00 PM	WTLAP-10-18034	0.0000000867
E039.1	7/21/2010 7:12:00 PM	WTLAP-10-18035	—*
E039.1	7/30/2010 10:57:00 PM	WTLAP-10-18036	0.00000121
E039.1	8/15/2010 4:15:00 PM	WTLAP-10-18037	0.000000876
E040	7/22/2010 8:50:00 PM	WTLAP-10-18026	0.00000081
E040	7/30/2010 11:35:00 PM	WTLAP-10-18027	0.00000113
E042.1	7/22/2010 9:49:00 PM	WTLAP-10-18352	0.00000677
E042.1	7/31/2010 12:53:00 AM	WTLAP-10-18353	0.00000167
E042.1	8/5/2010 3:50:00 PM	WTLAP-10-18354	0.0000113
E042.1	8/15/2010 5:26:00 PM	WTLAP-10-18171	0.00000426
E042.1	8/16/2010 4:21:00 PM	WTLAP-10-18355	0.0000154
E055	7/22/2010 7:29:00 PM	WTLAP-10-17816	0.0000017
E055	8/5/2010 2:24:00 PM	WTLAP-10-17817	0.0000102
E055	8/15/2010 5:28:00 PM	WTLAP-10-17818	0.00000358
E055.5	7/22/2010 6:59:00 PM	WTLAP-10-17820	0.000000765
E055.5	8/5/2010 2:08:00 PM	WTLAP-10-17821	0.00000388
E055.5	8/15/2010 5:18:00 PM	WTLAP-10-17822	0.000124
E055.5	8/23/2010 3:11:00 PM	WTLAP-10-17823	0.00000121
E056	8/5/2010 2:19:00 PM	WTLAP-10-17812	0.00000263
E056	8/15/2010 4:28:00 PM	WTLAP-10-17813	0.00000103
E056	9/22/2010 5:47:00 PM	WTLAP-10-17814	0.000000133
E059	8/5/2010 3:29:00 PM	WTLAP-10-25535	0.0000184
E060.1	8/16/2010 5:54:00 PM	WTLAP-10-18175	0.00000577
E109.9	8/15/2010 3:41:00 PM	WTLAP-10-18356	0.0000000921
E109.9	9/22/2010 5:42:00 PM	WTLAP-10-18358	0.000003

Note: All results are in micrograms per liter.



* — = No dioxin or furan congener was detected.



Appendix A



*Hydrographs, Hyetographs, and Sedigraphs
for Samples Collected*



This appendix summarizes the relationships between precipitation, discharge, and sediment concentrations determined for each storm event sampled. Hydrographs at gages from each storm event resulting in sample collection are represented. These hydrographs are overlaid with precipitation measured at associated rain gages and sediment concentrations measured from samples collected during discharge.



Hydrographs (+), hyetographs (assorted colors of stacked bars), and sedigraphs (●) for storm events during which sampling was performed are displayed.

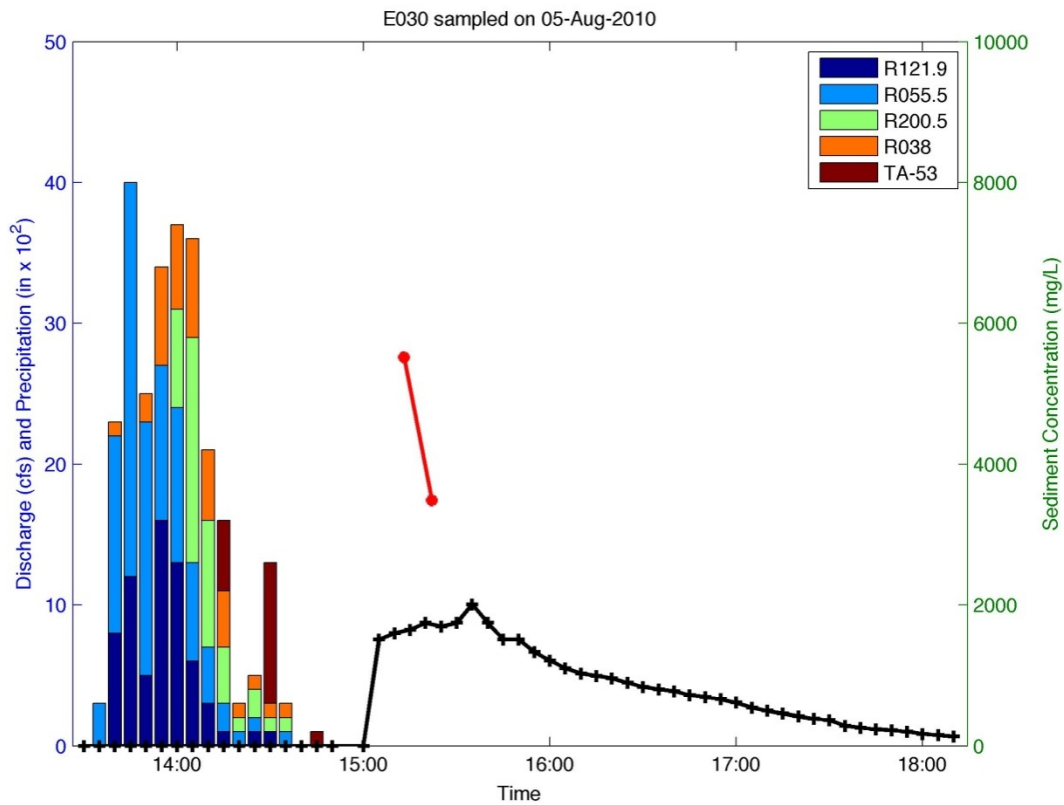
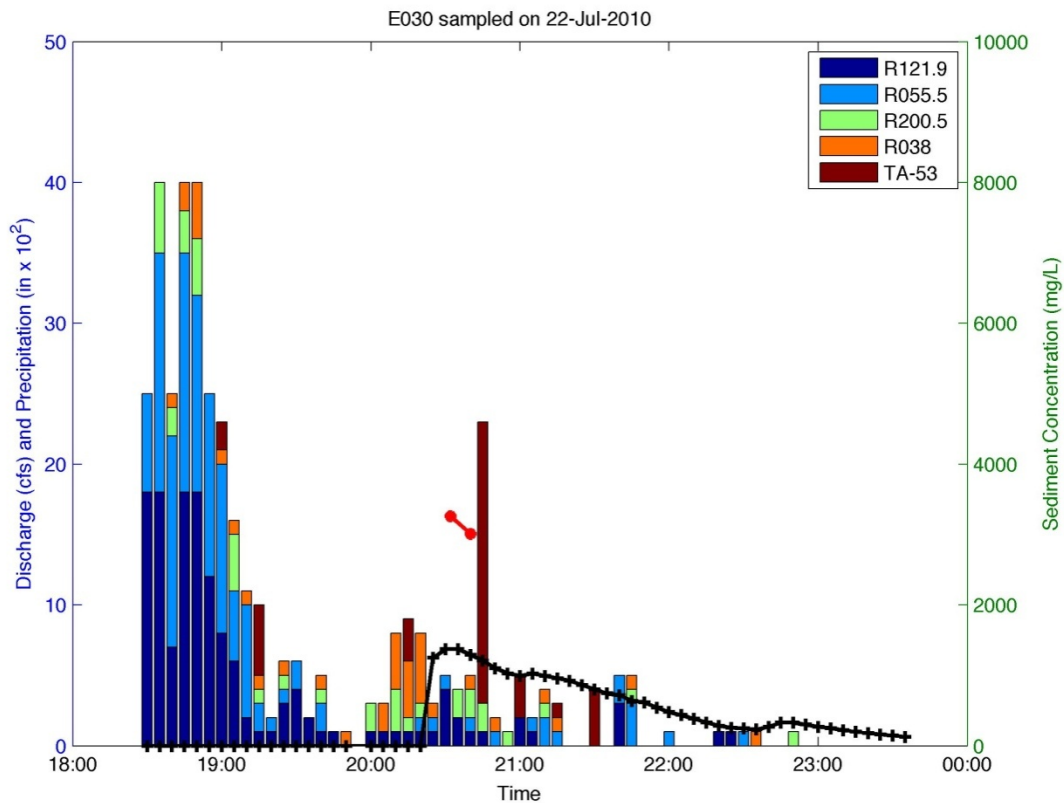


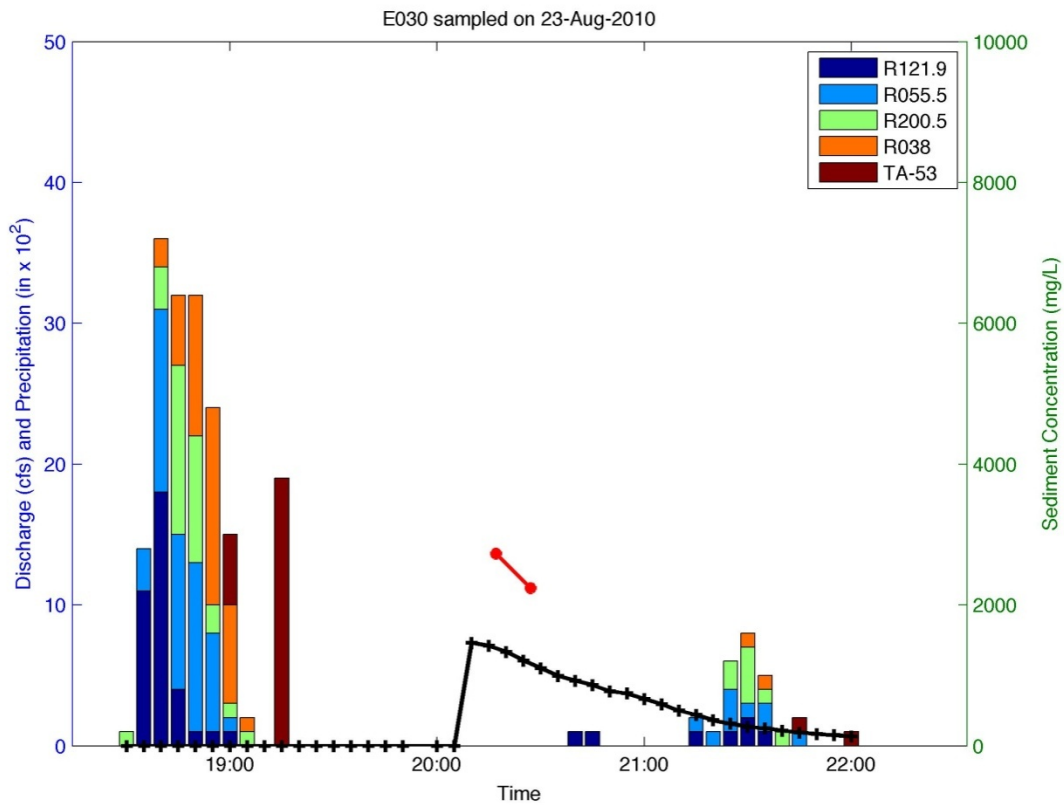
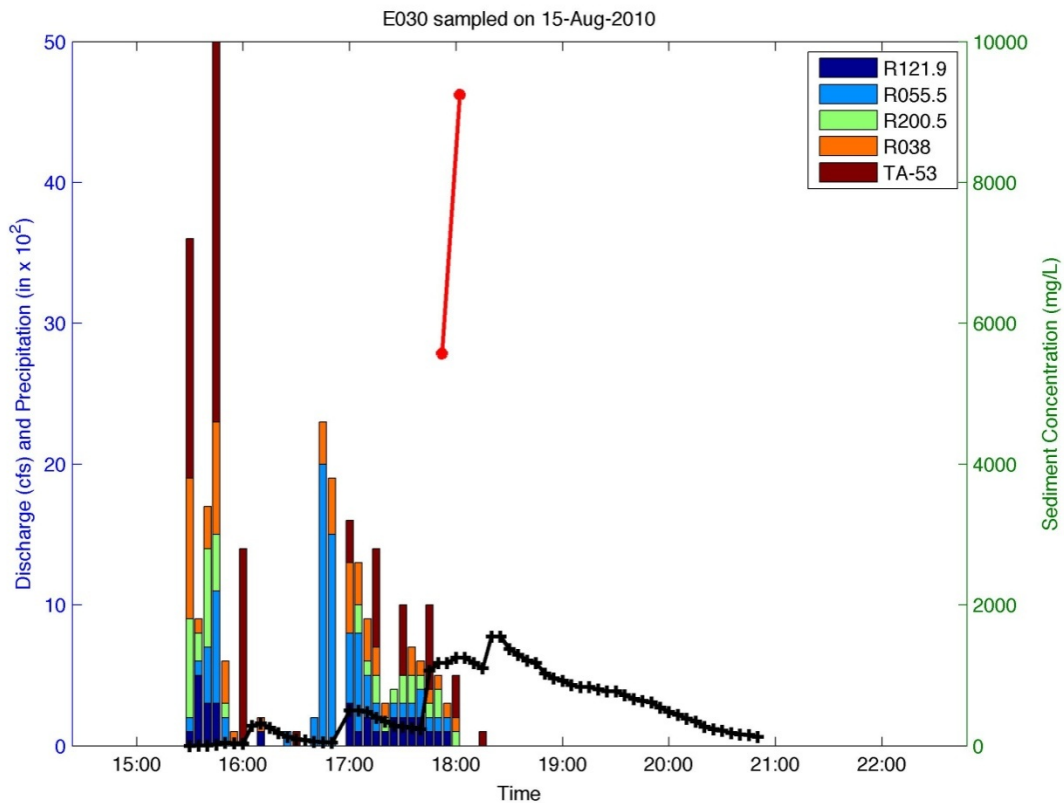


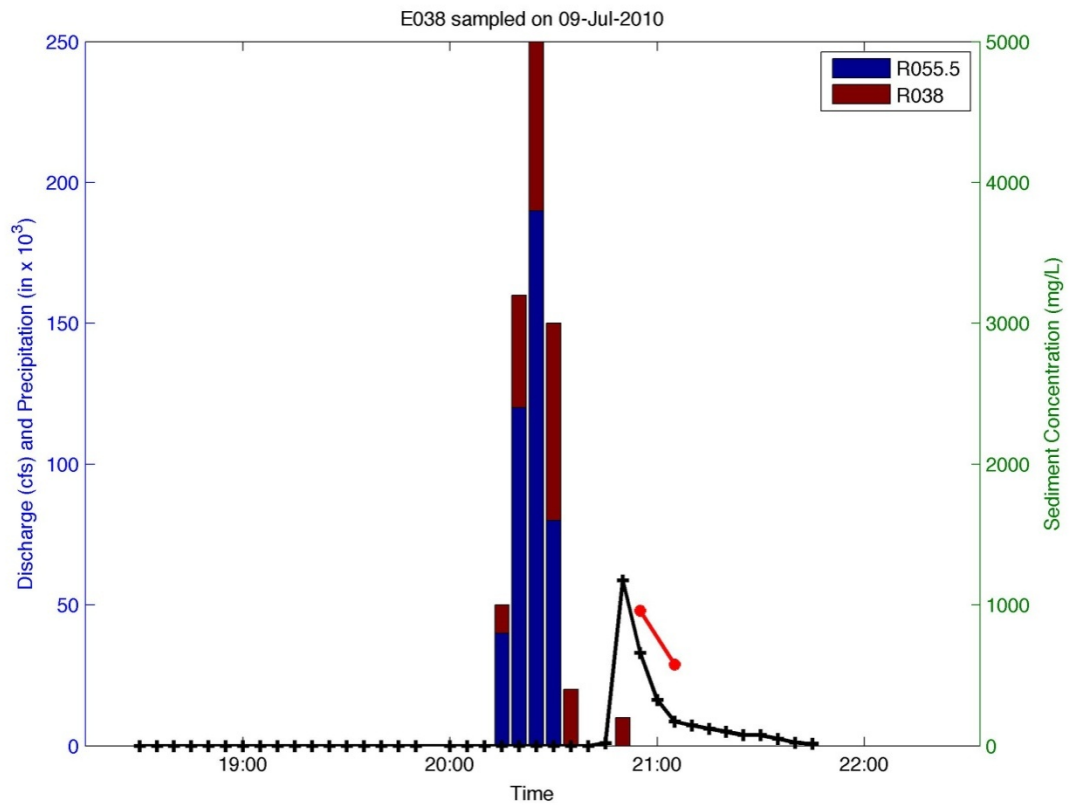
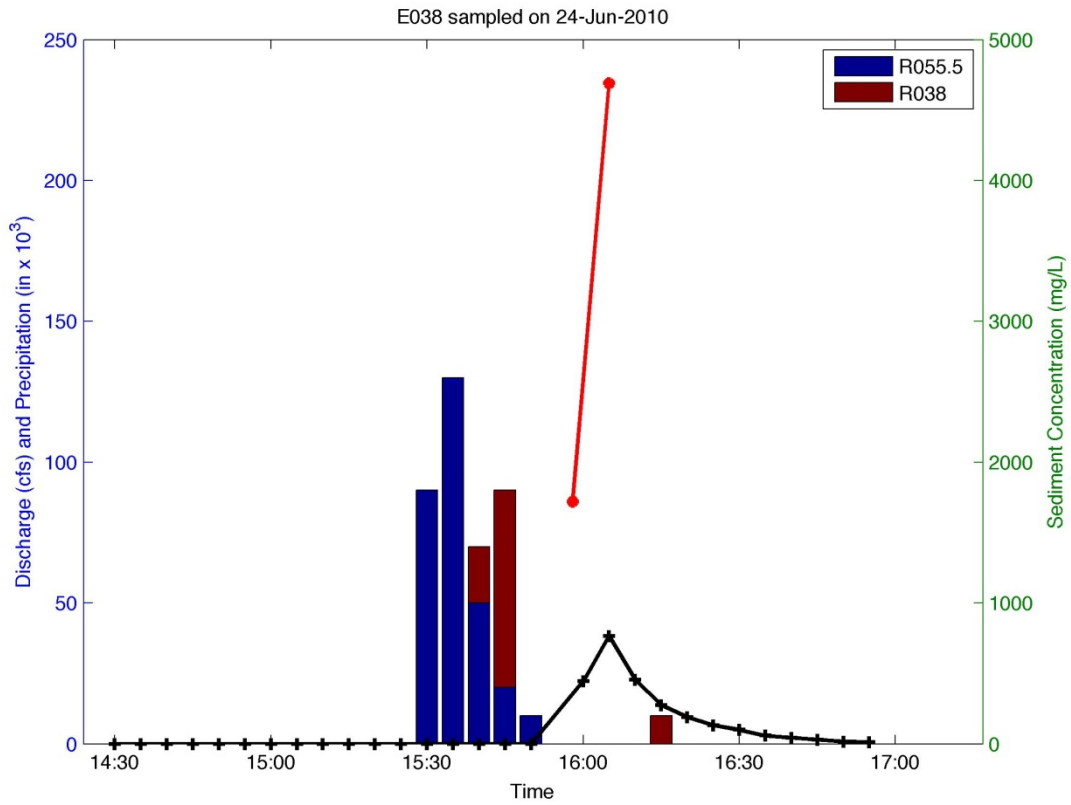


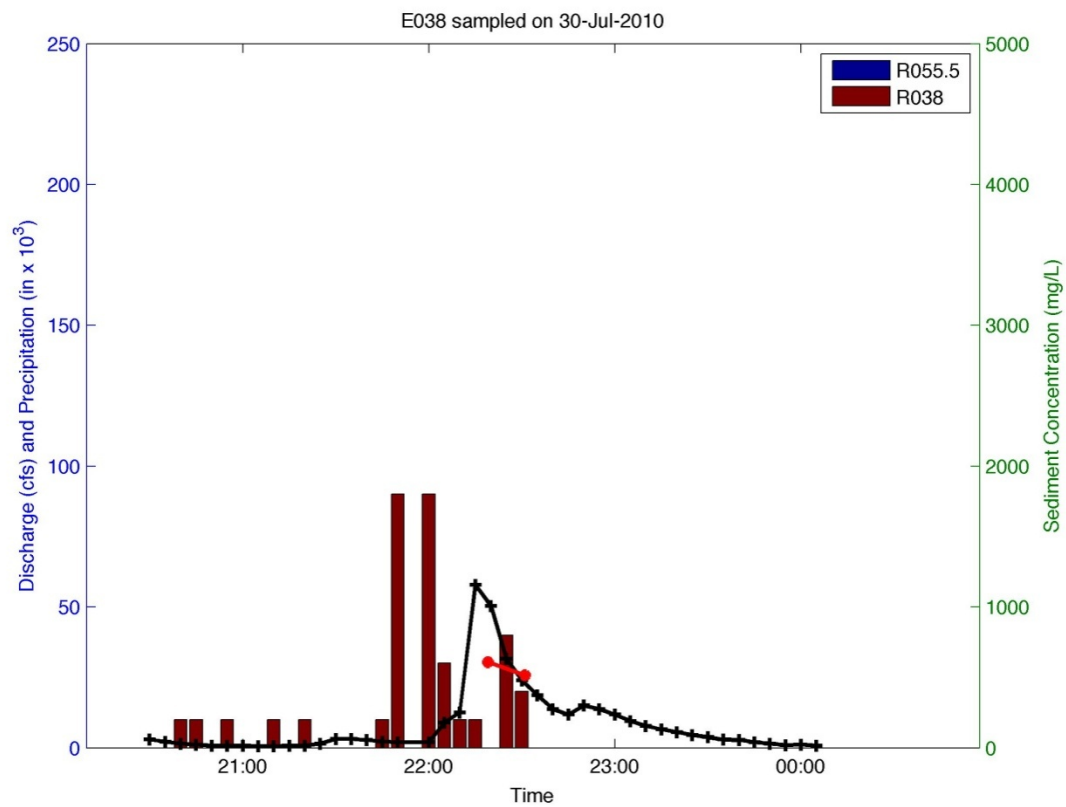
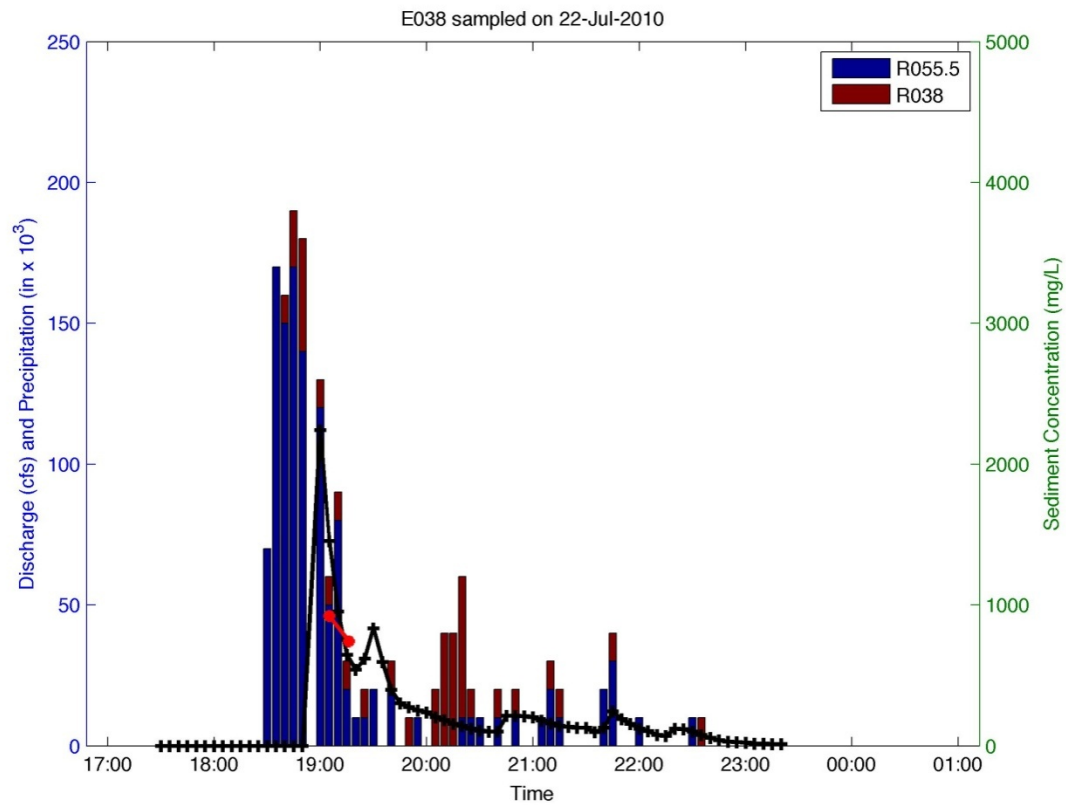


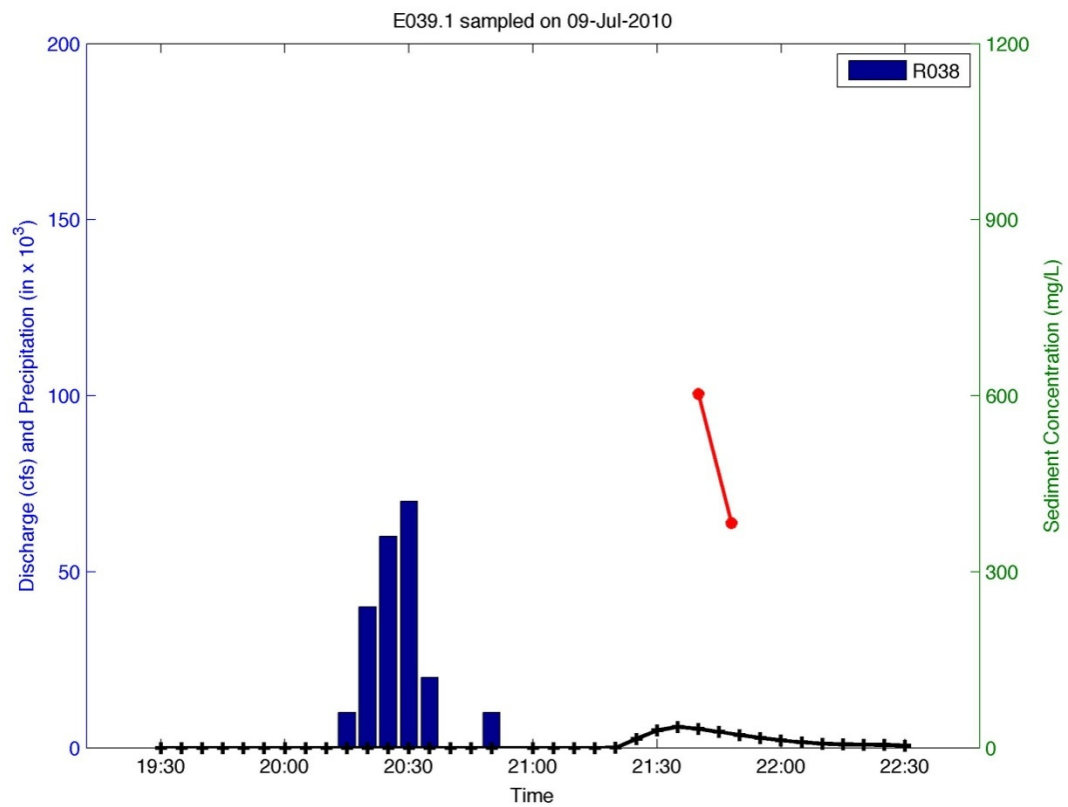
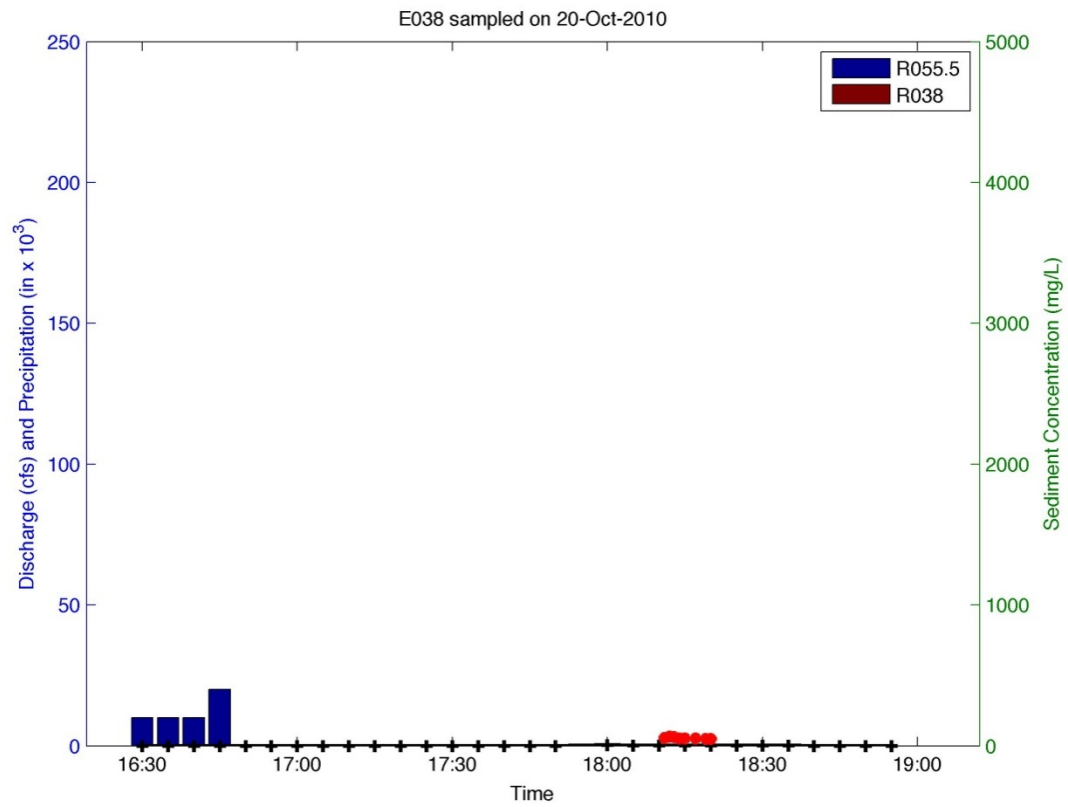


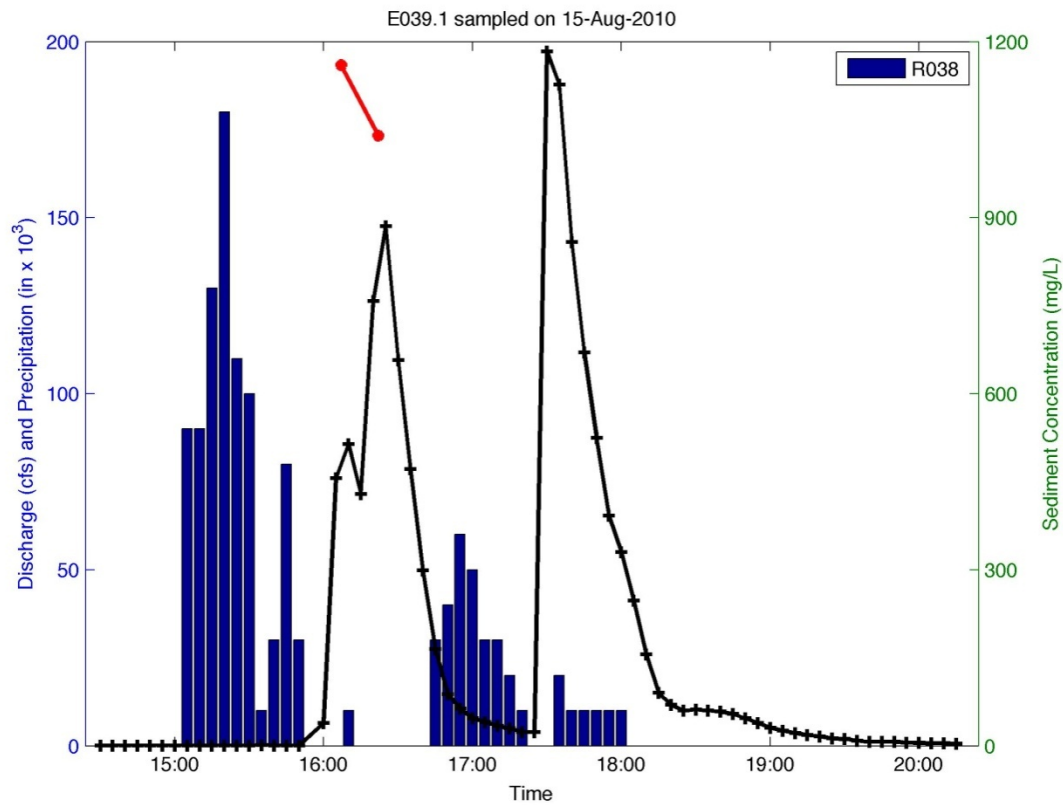
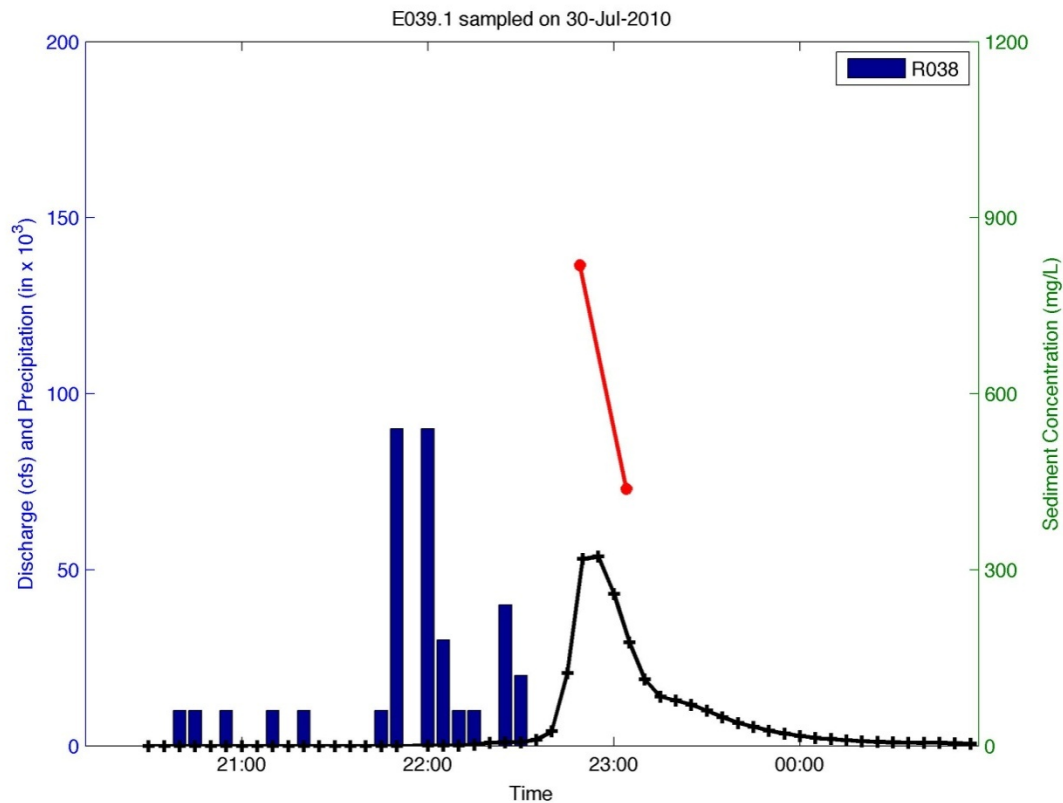


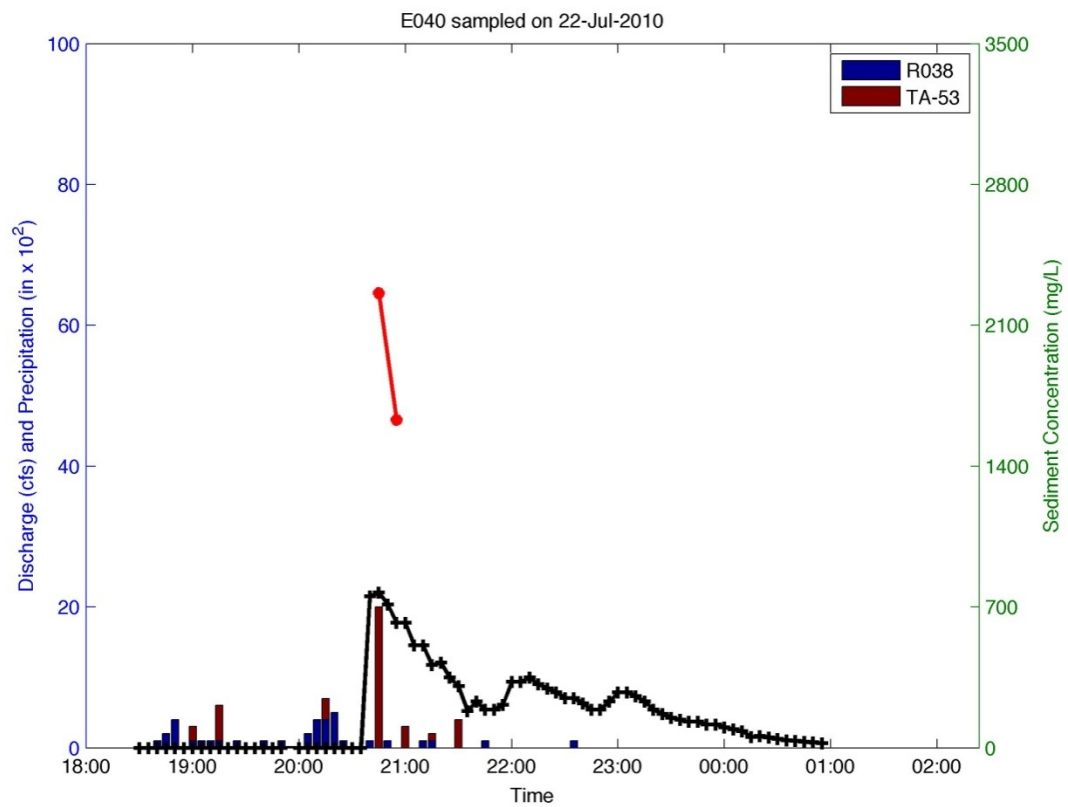
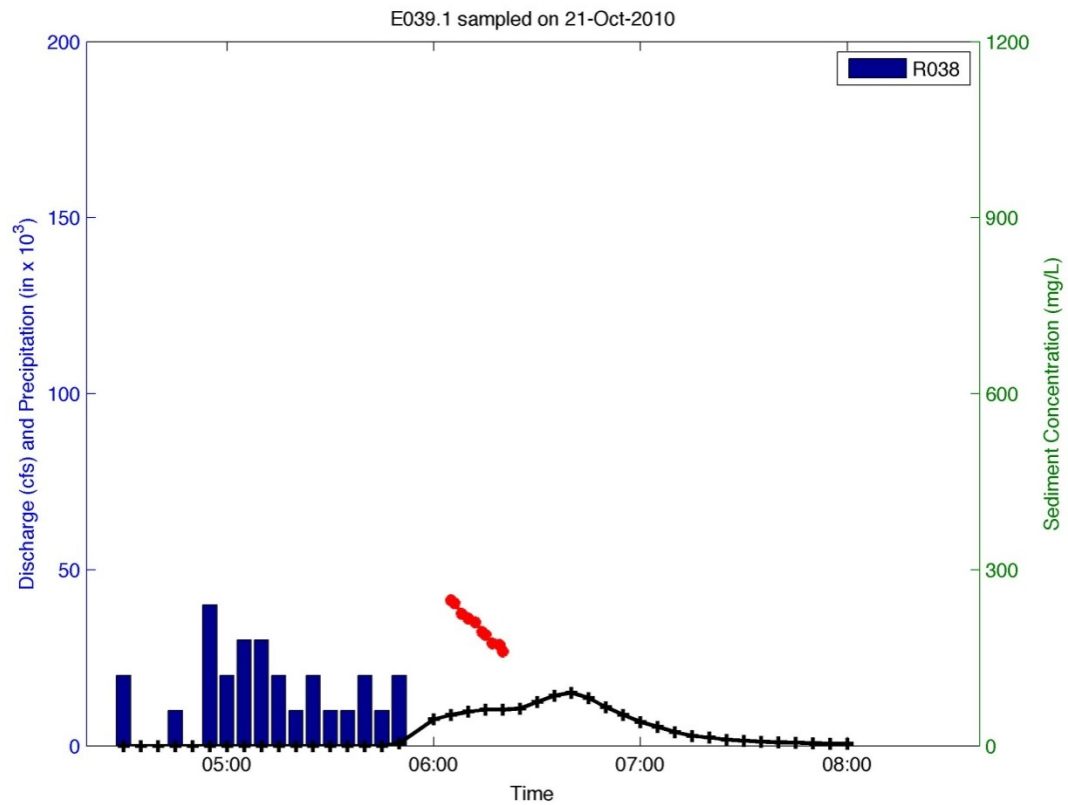


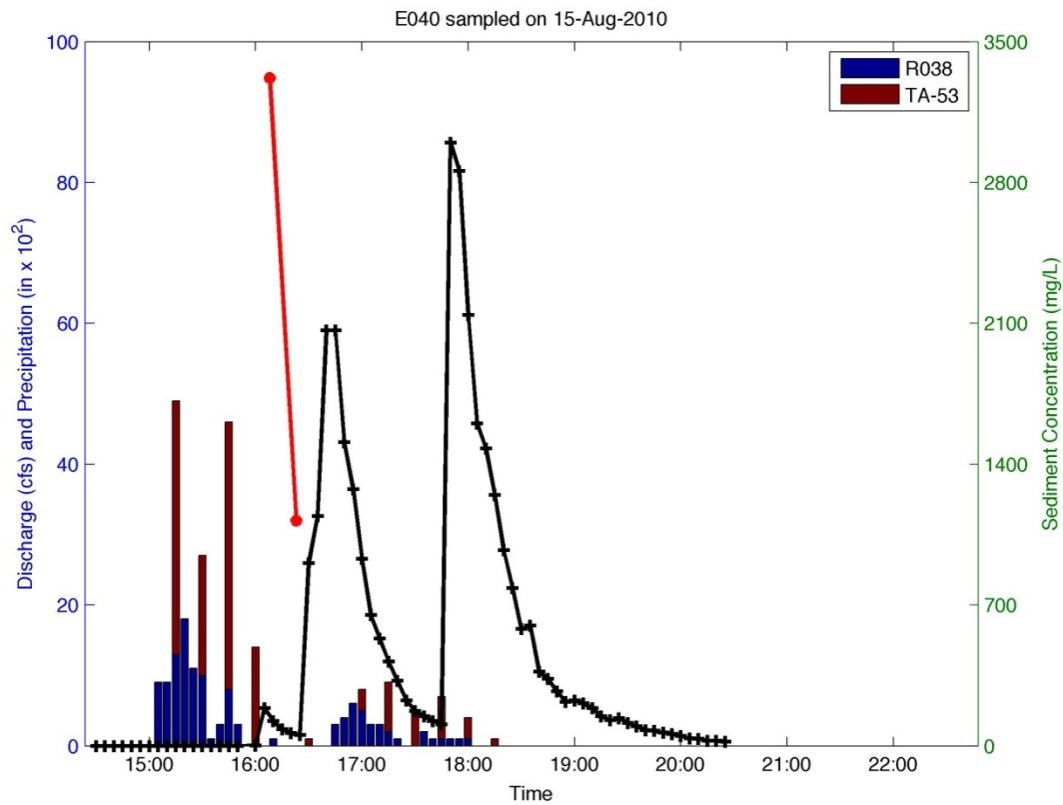
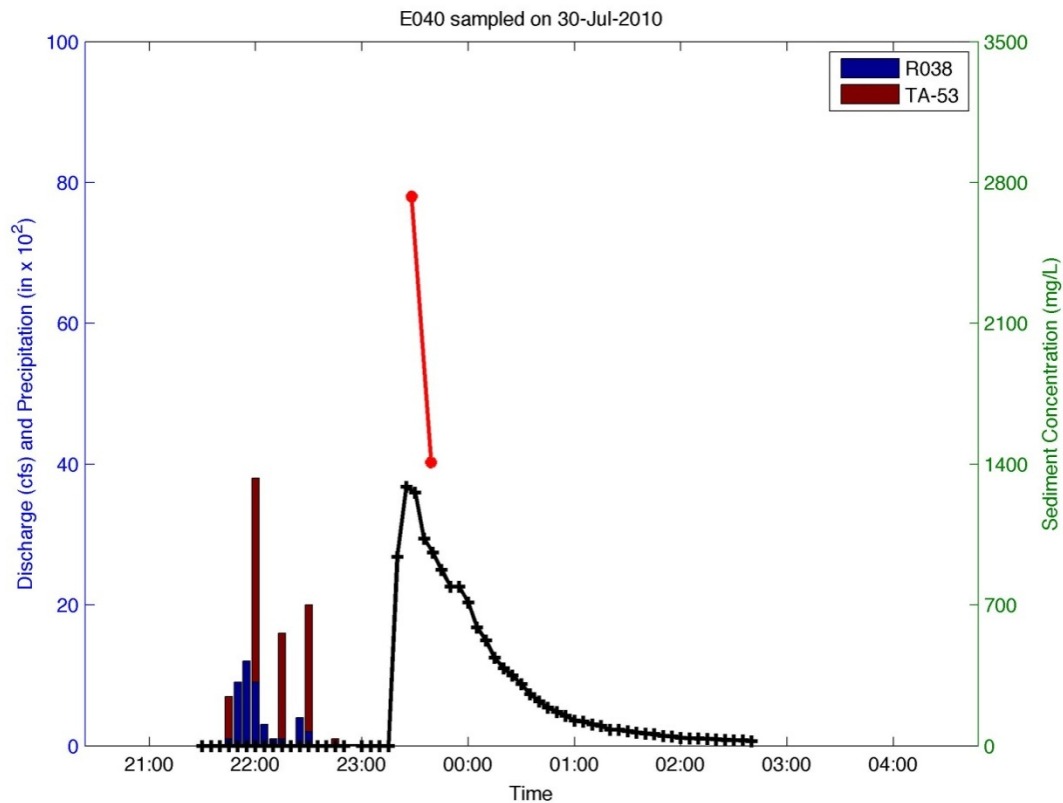


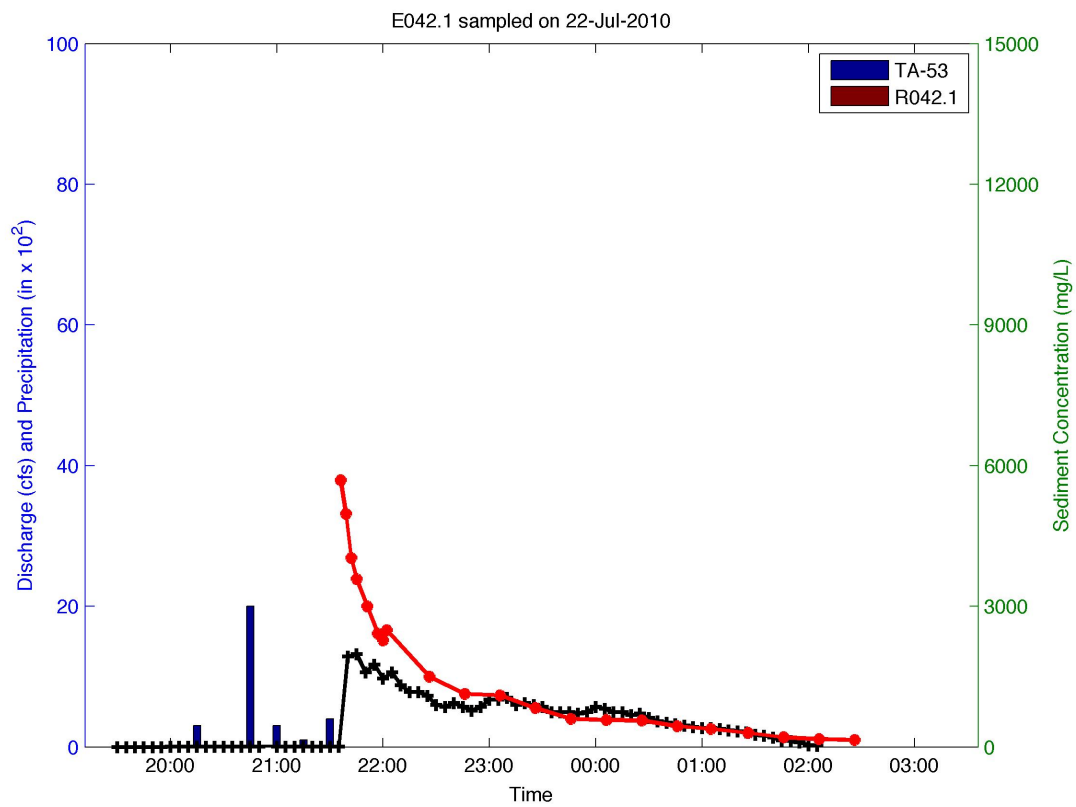
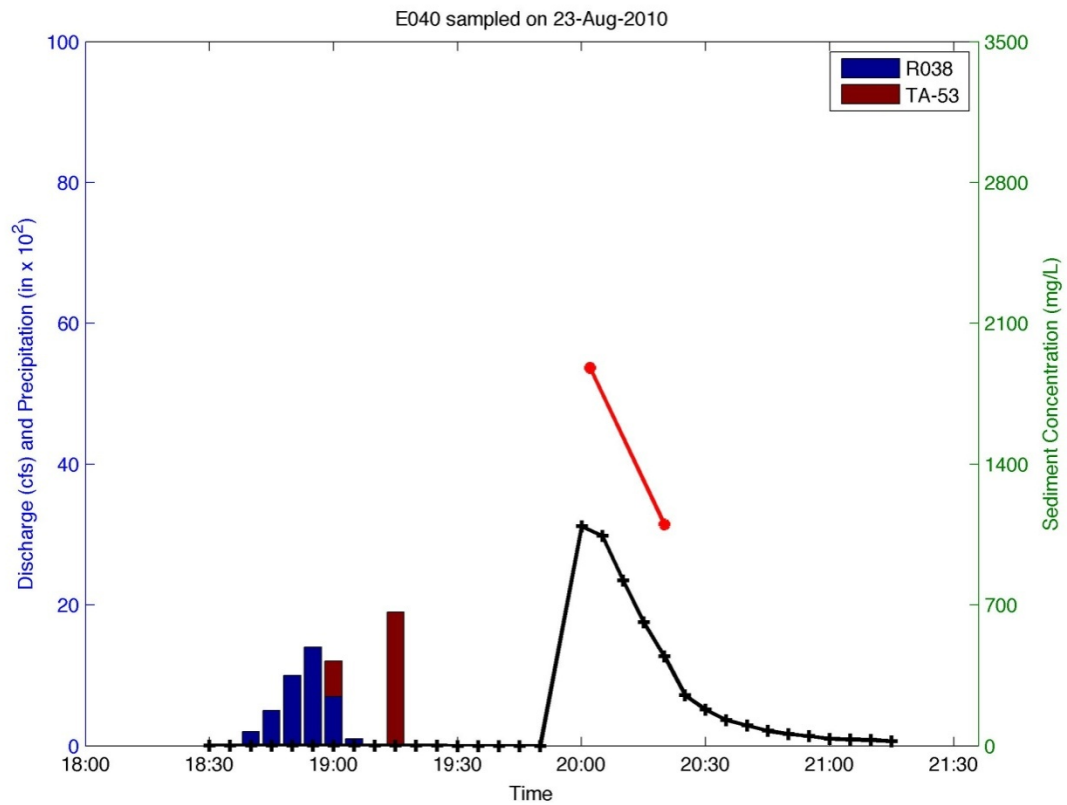


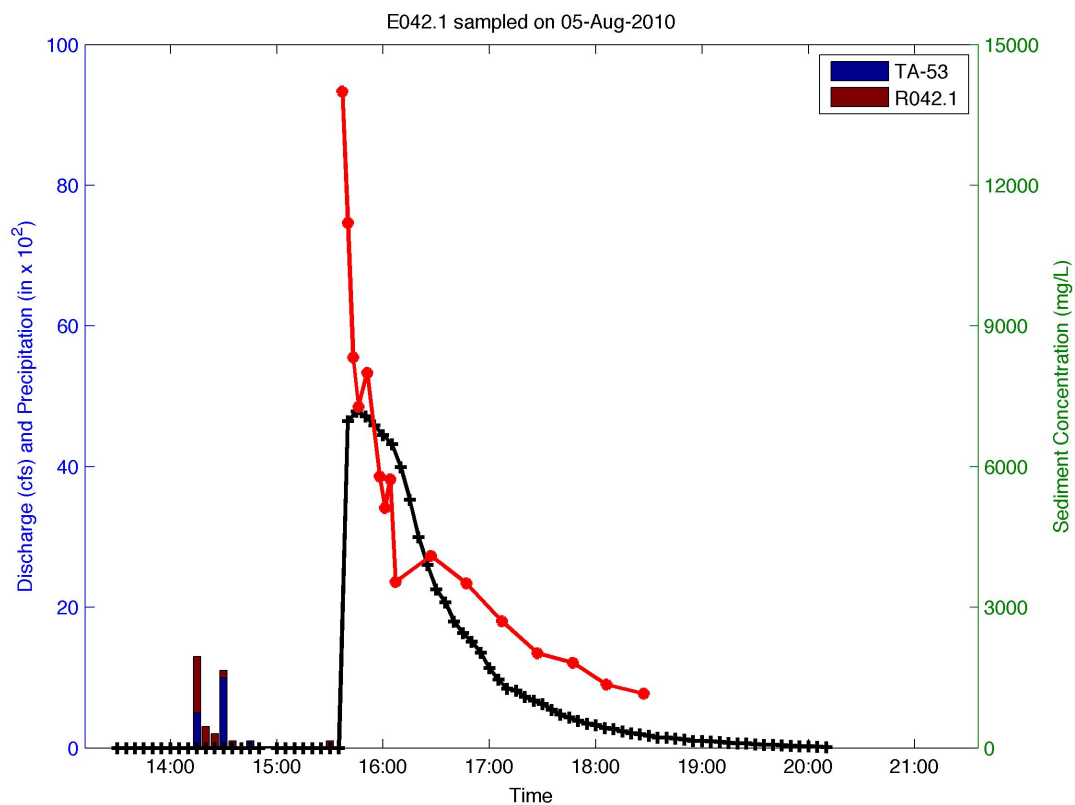
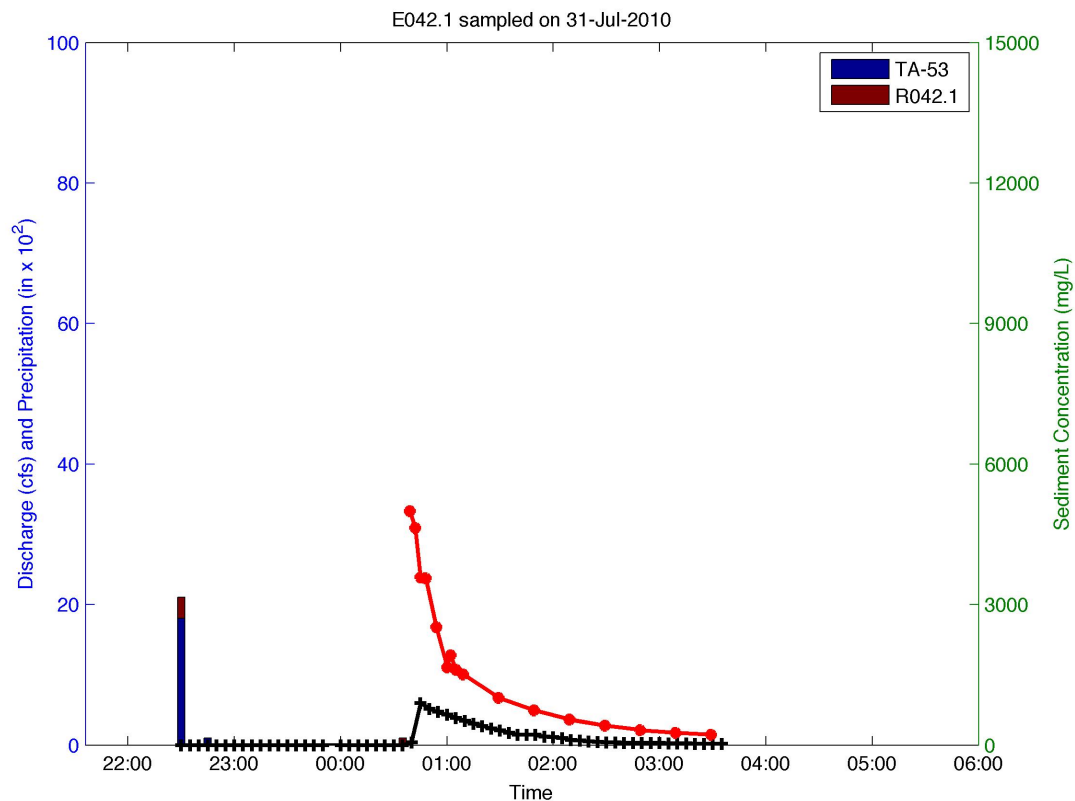


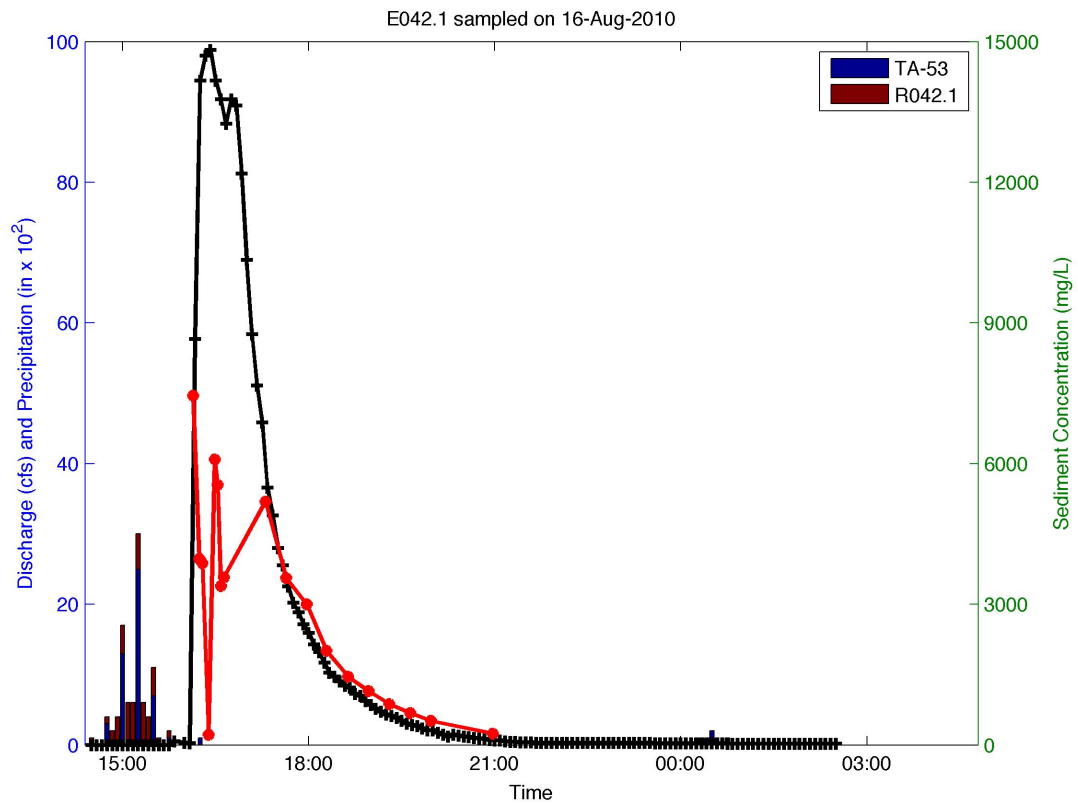
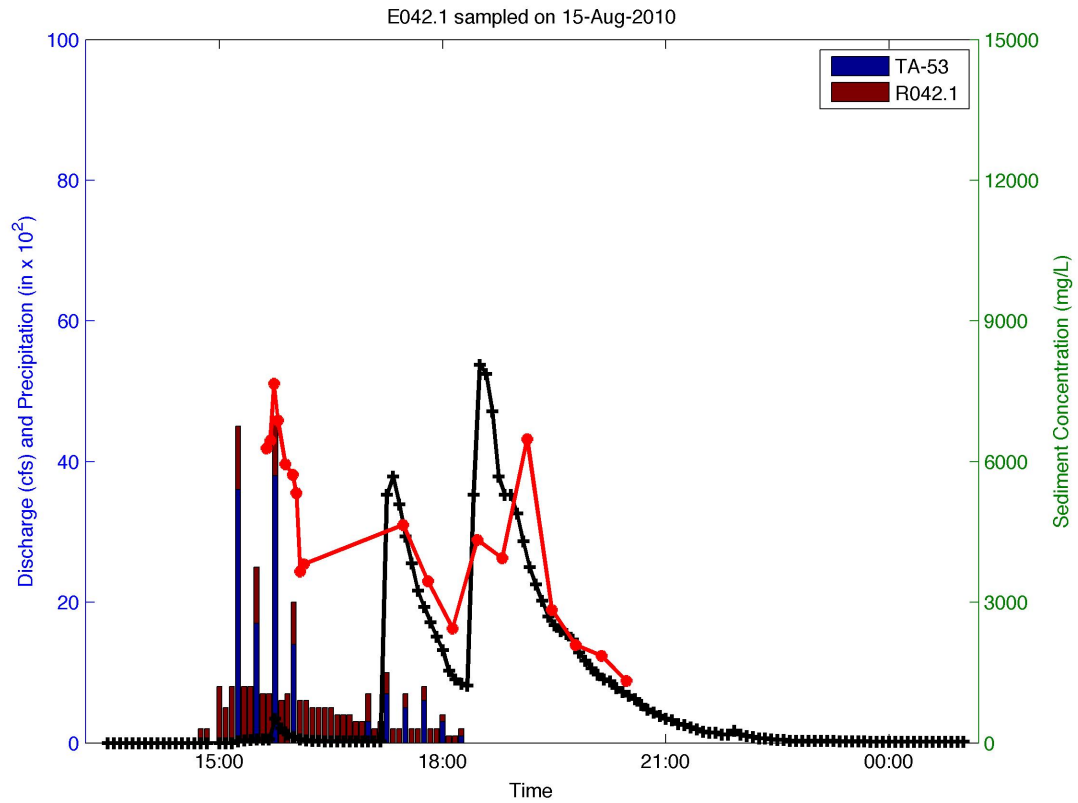


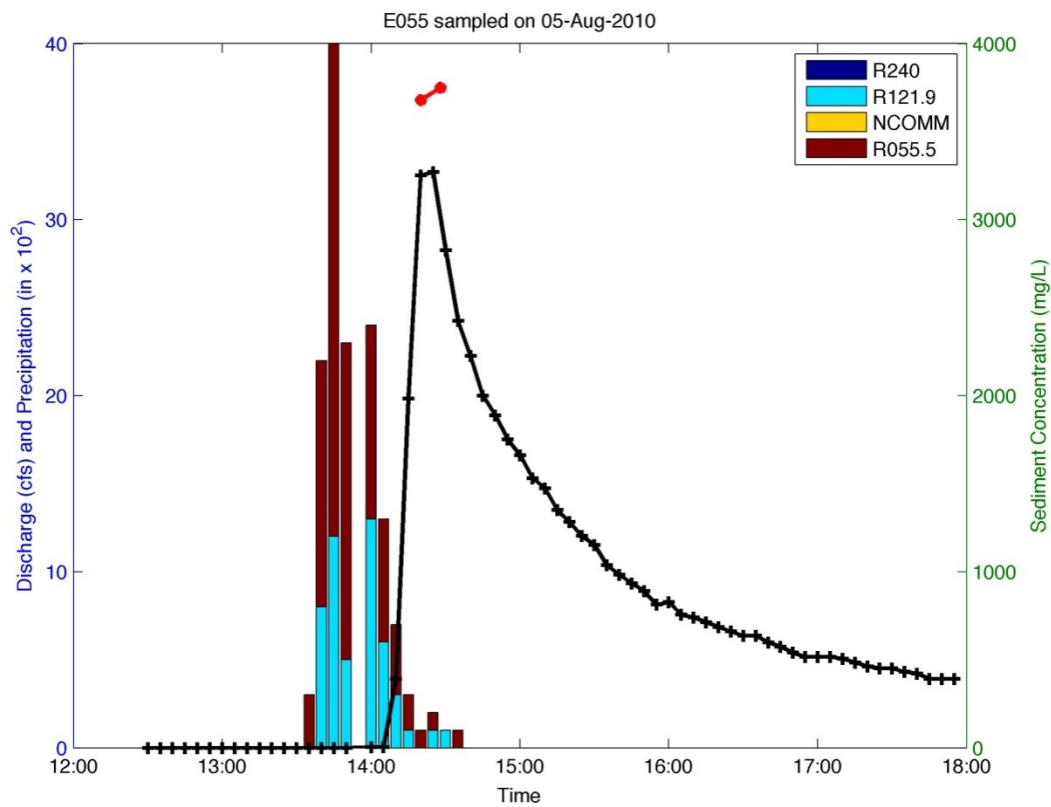
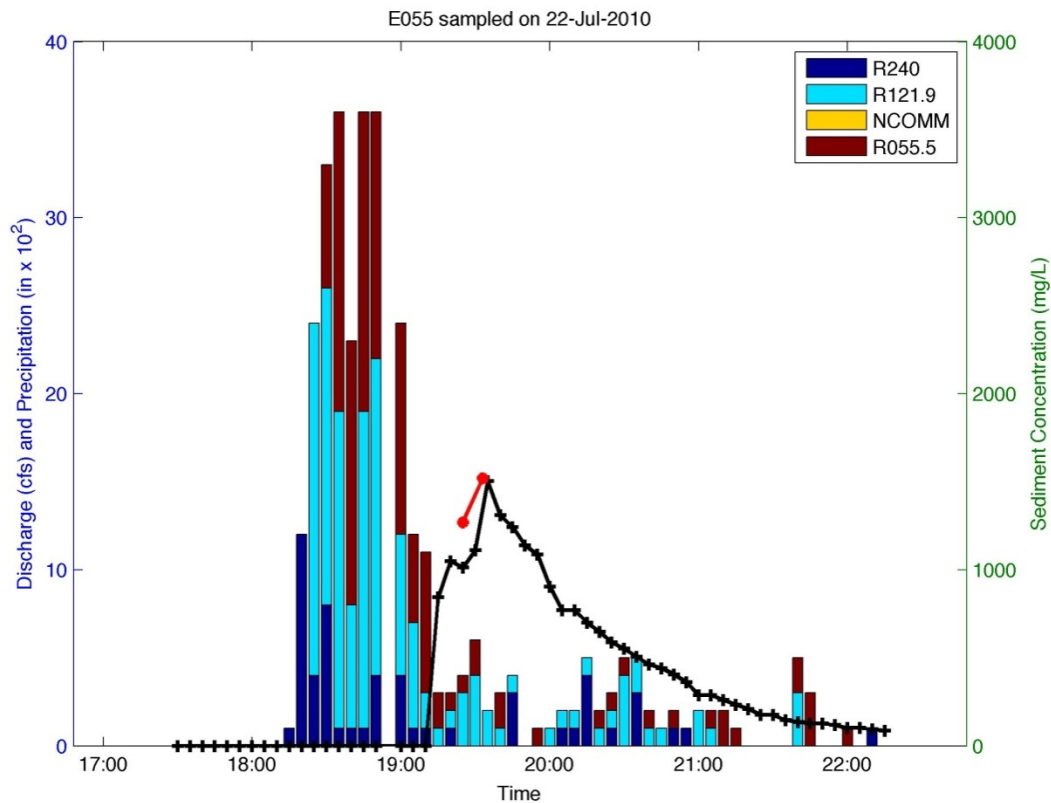


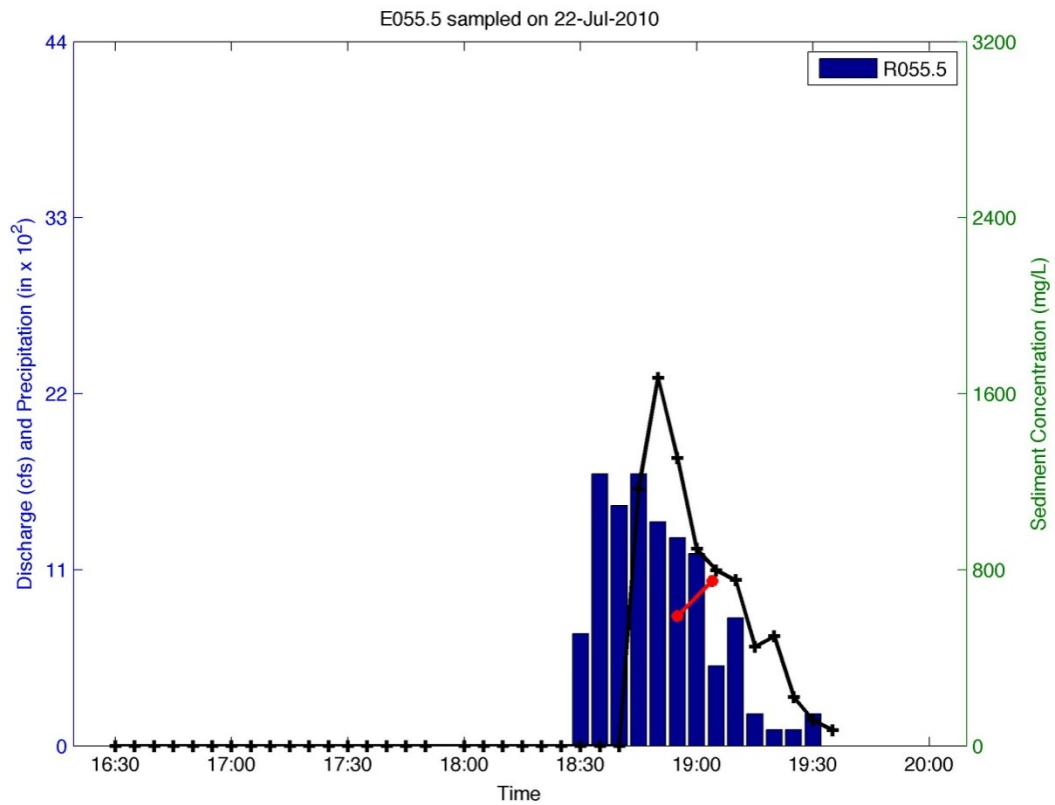
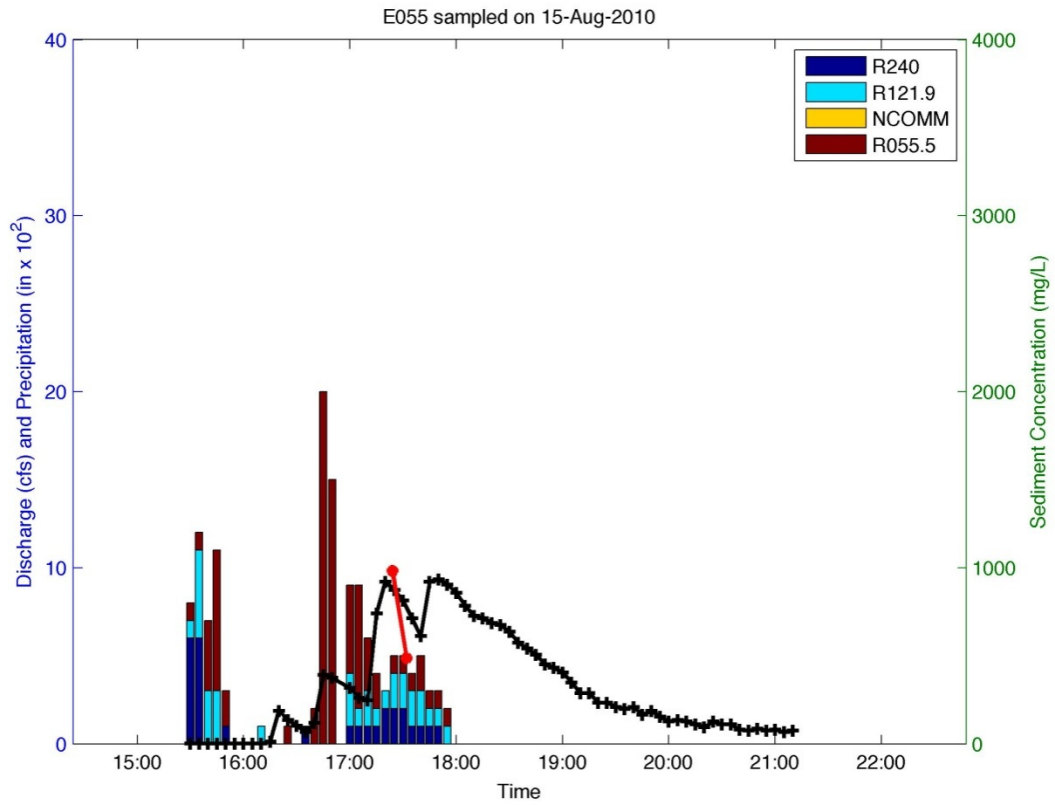


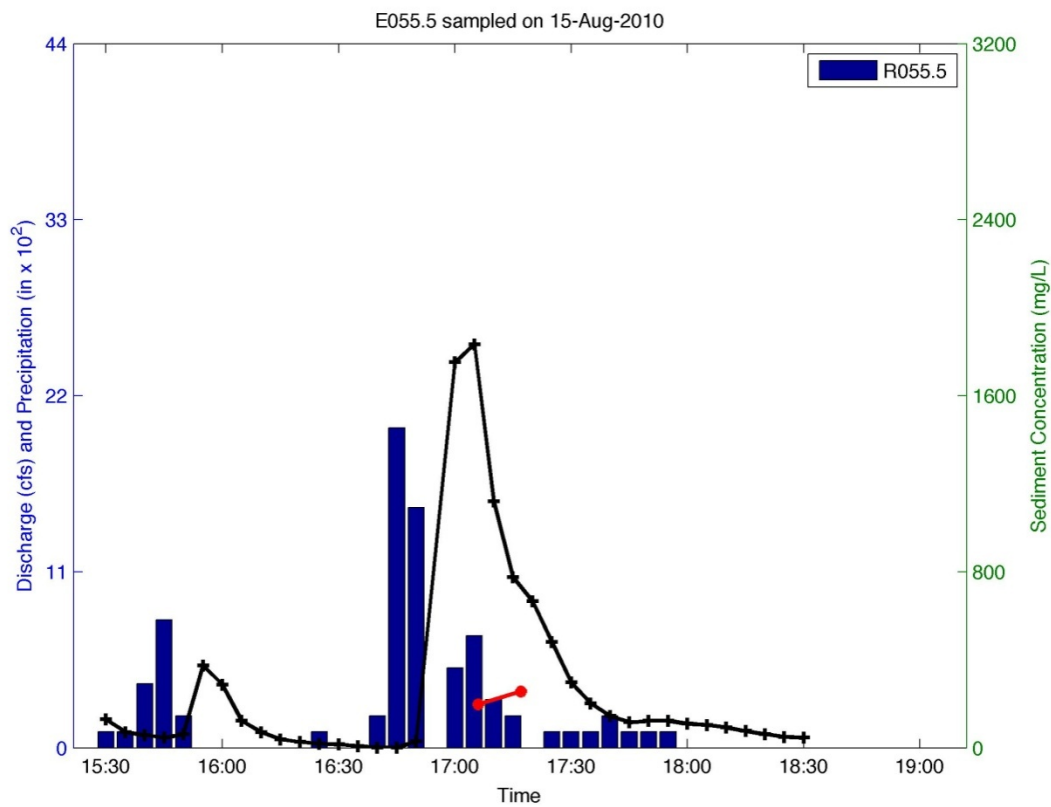
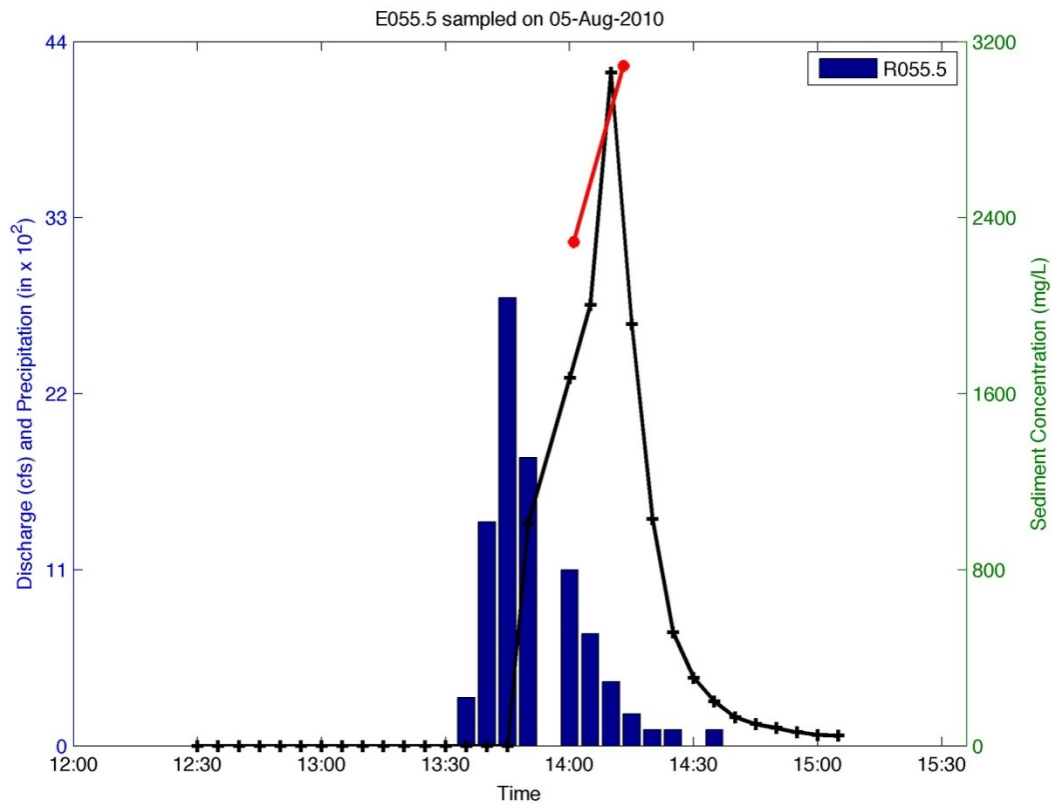


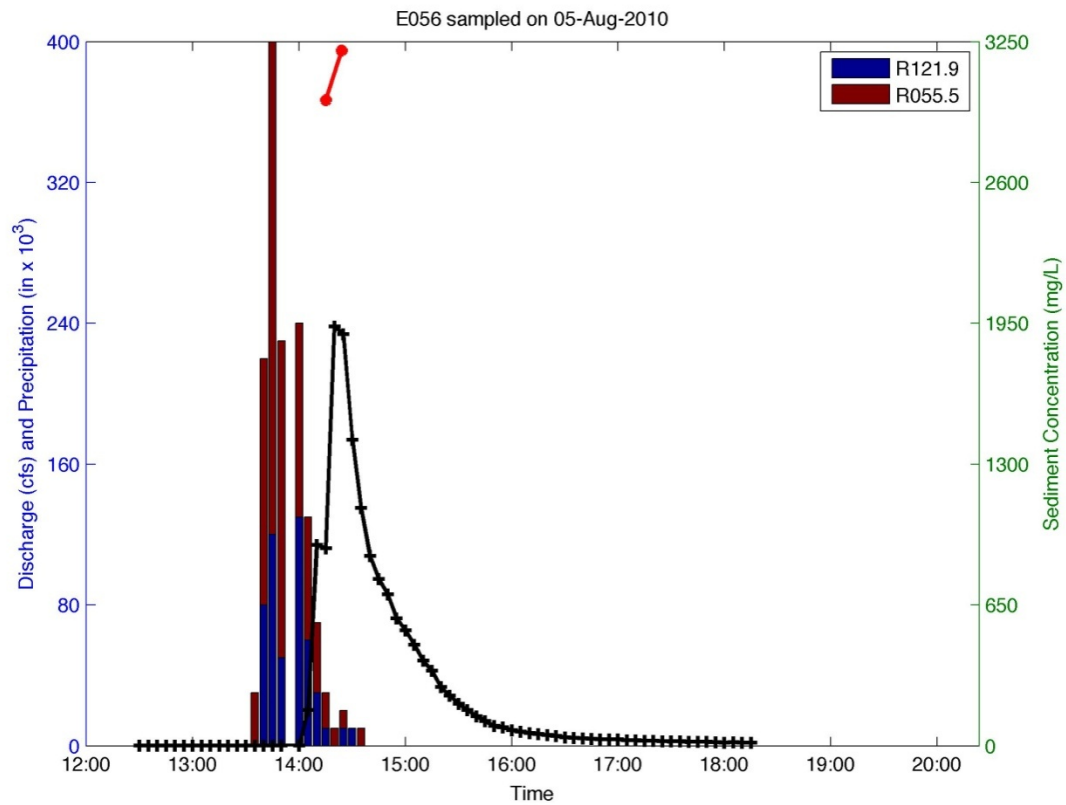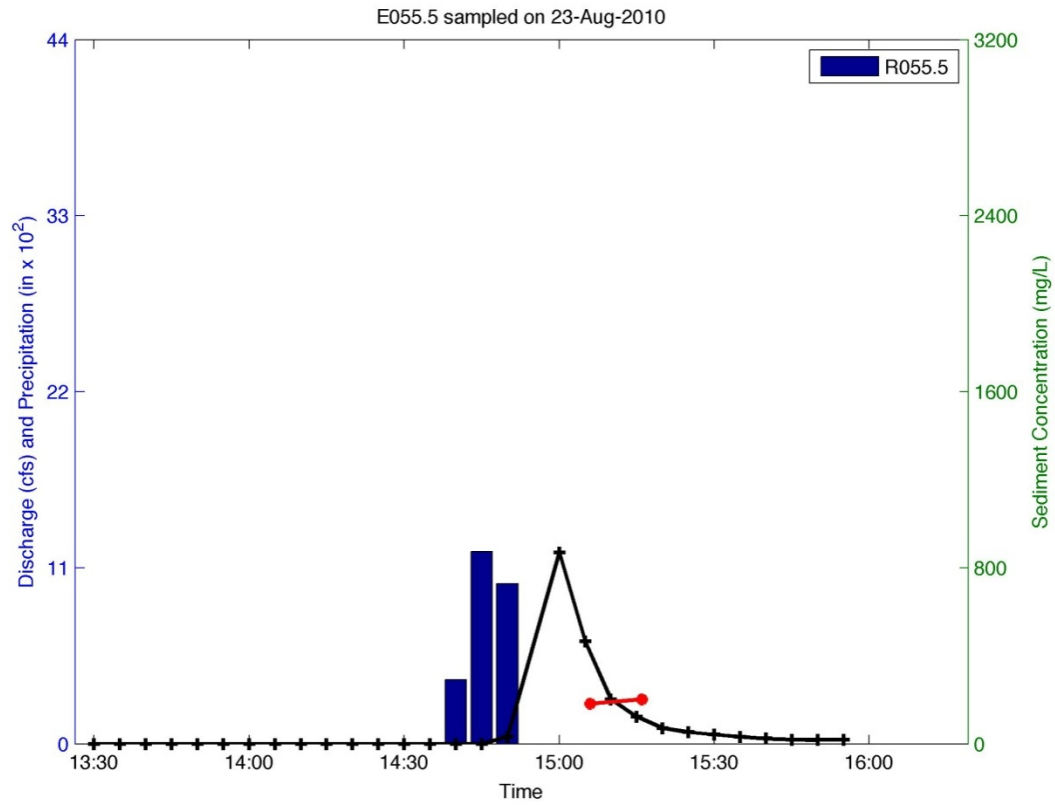


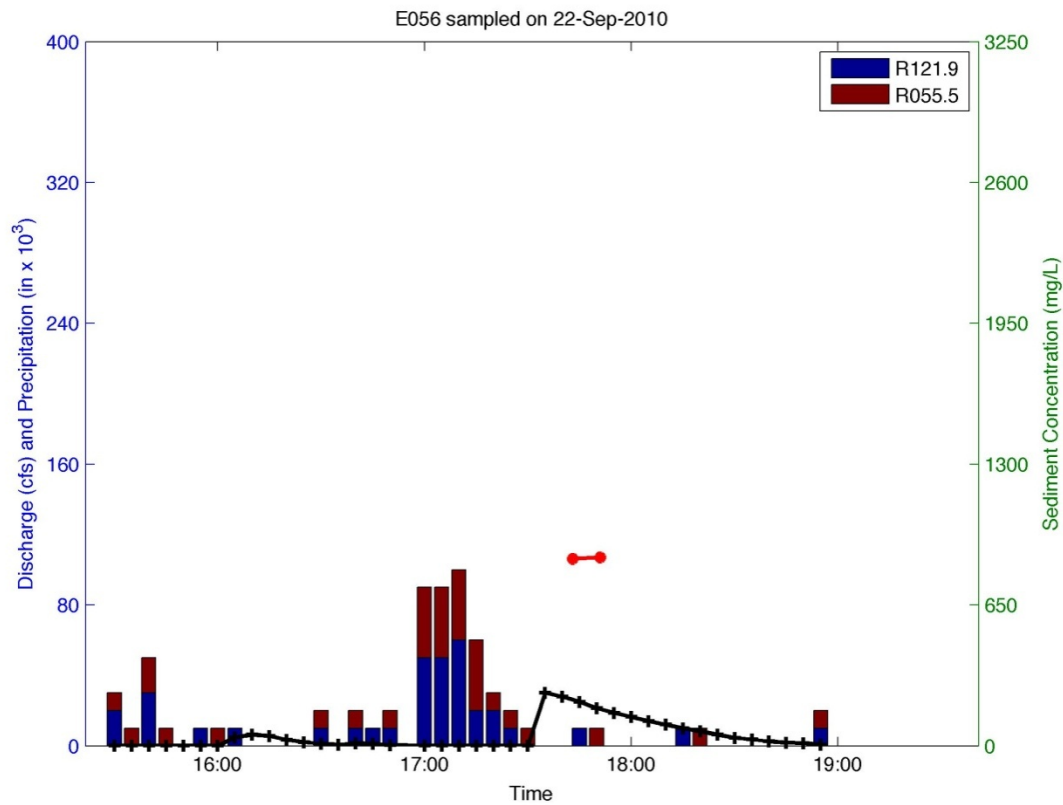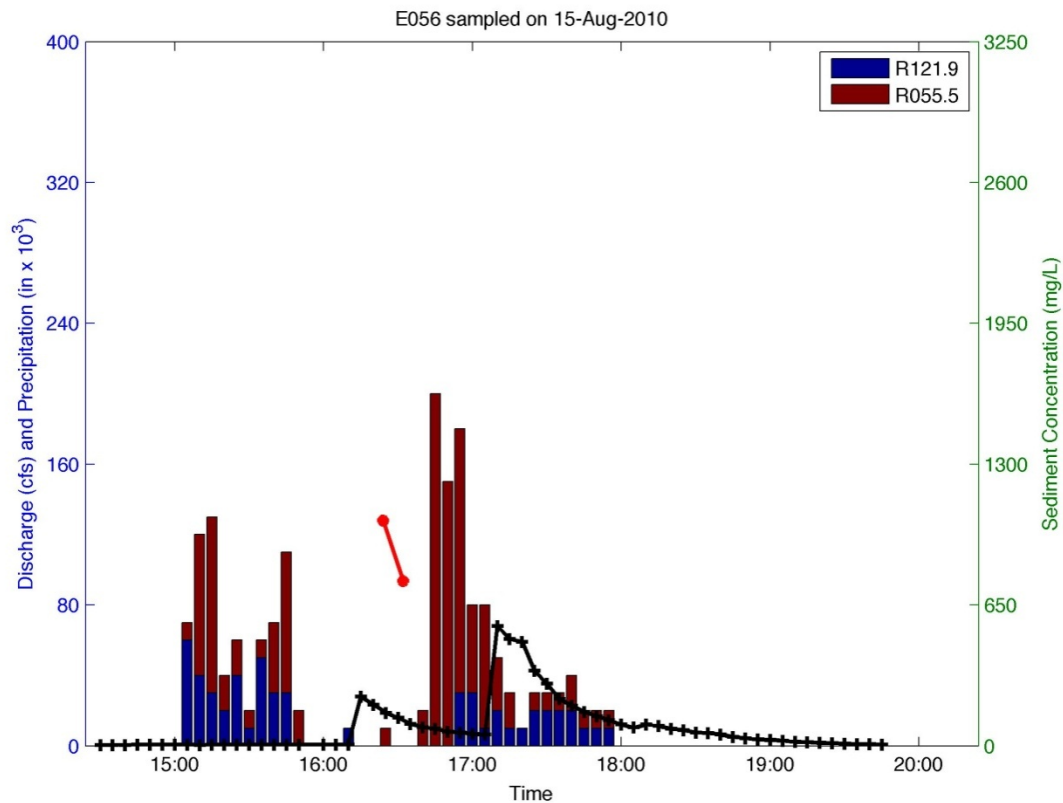

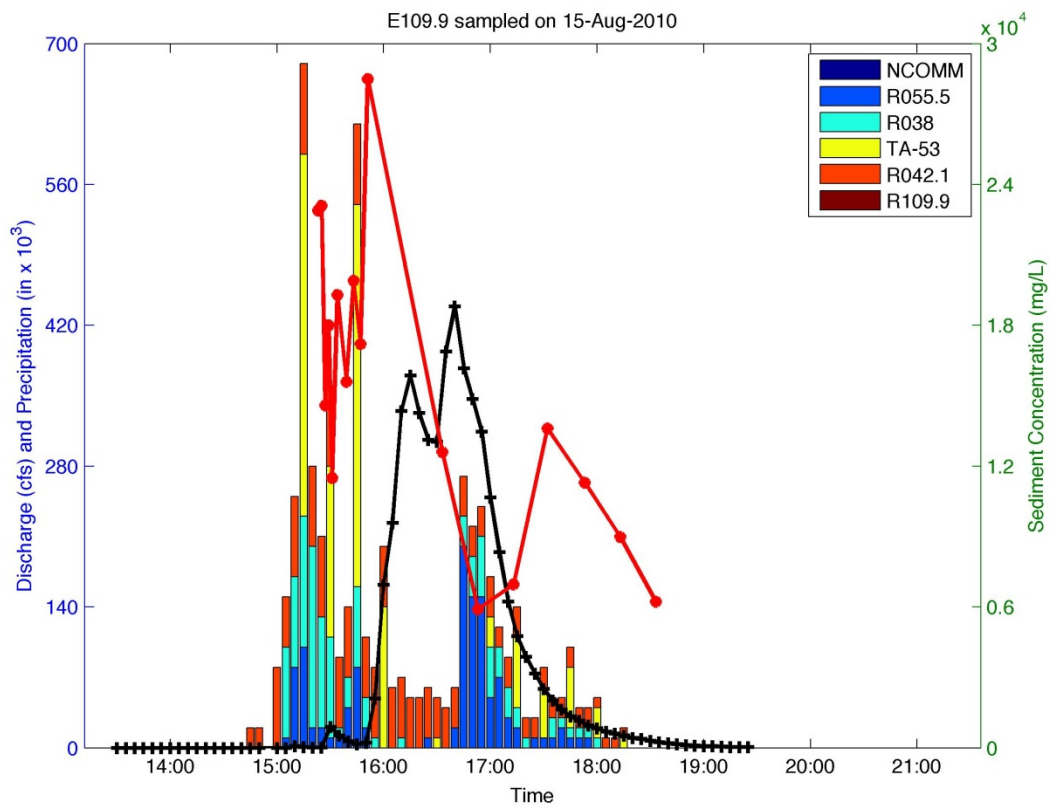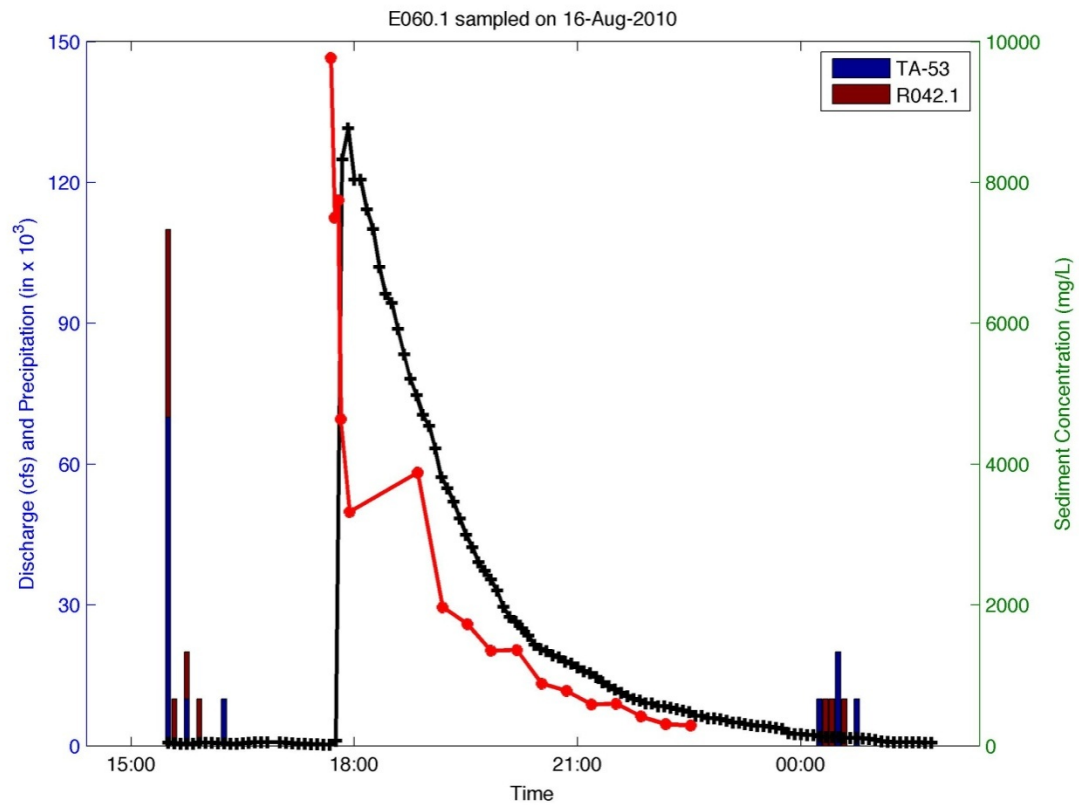

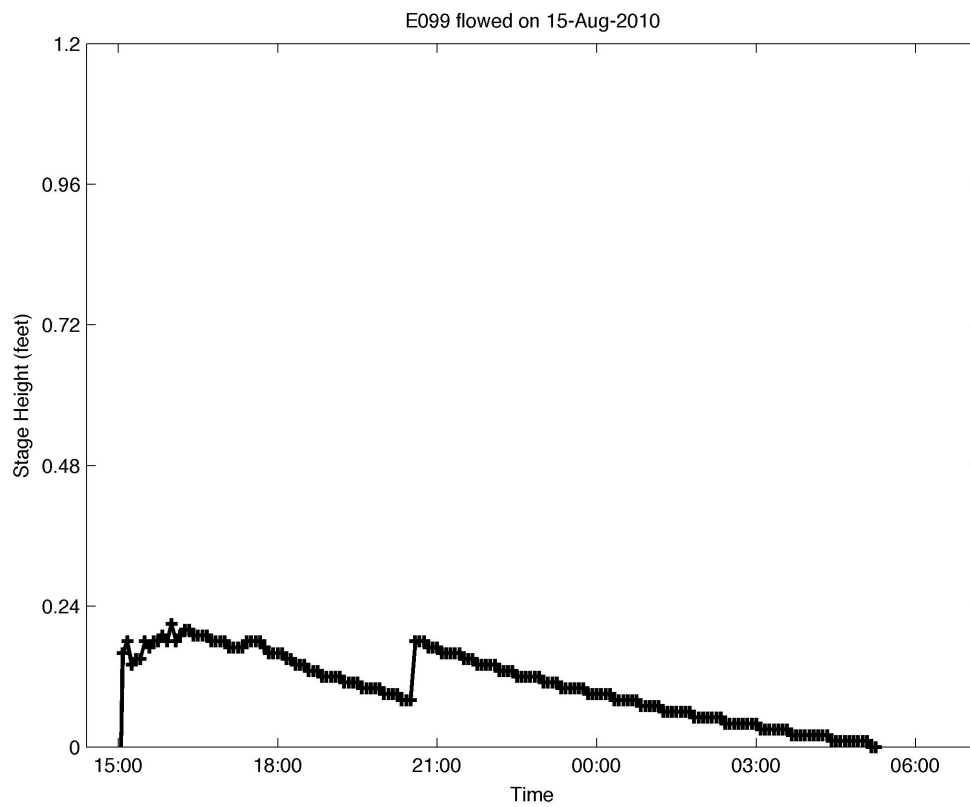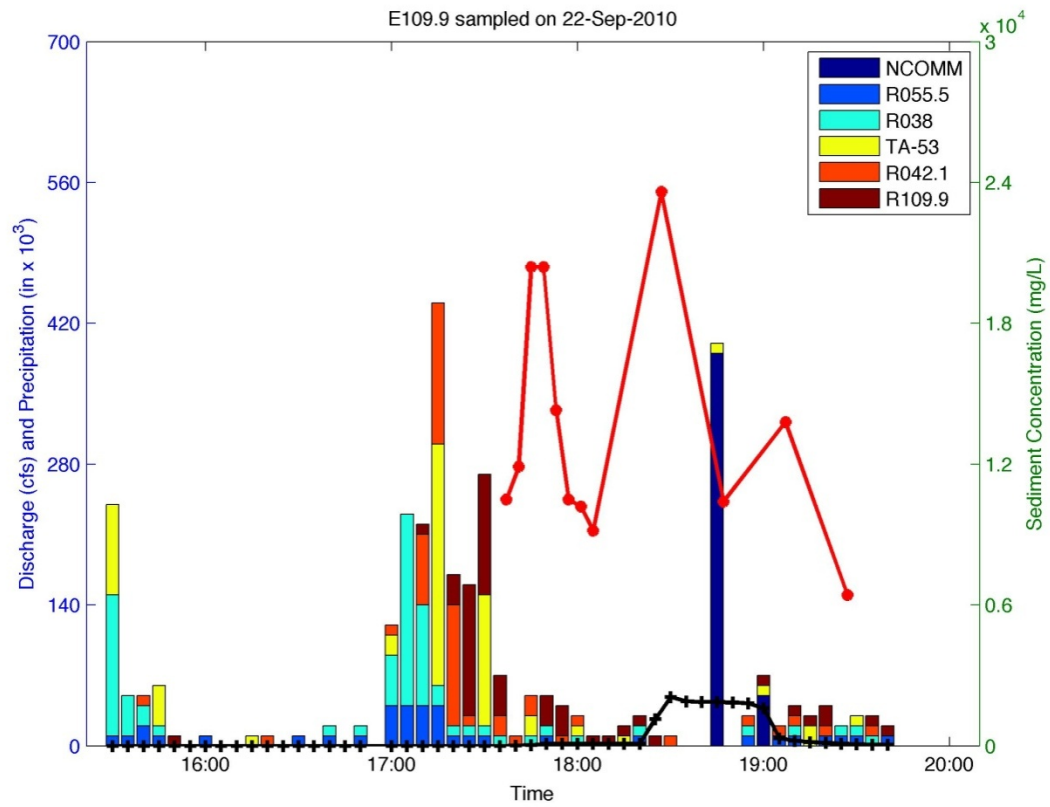

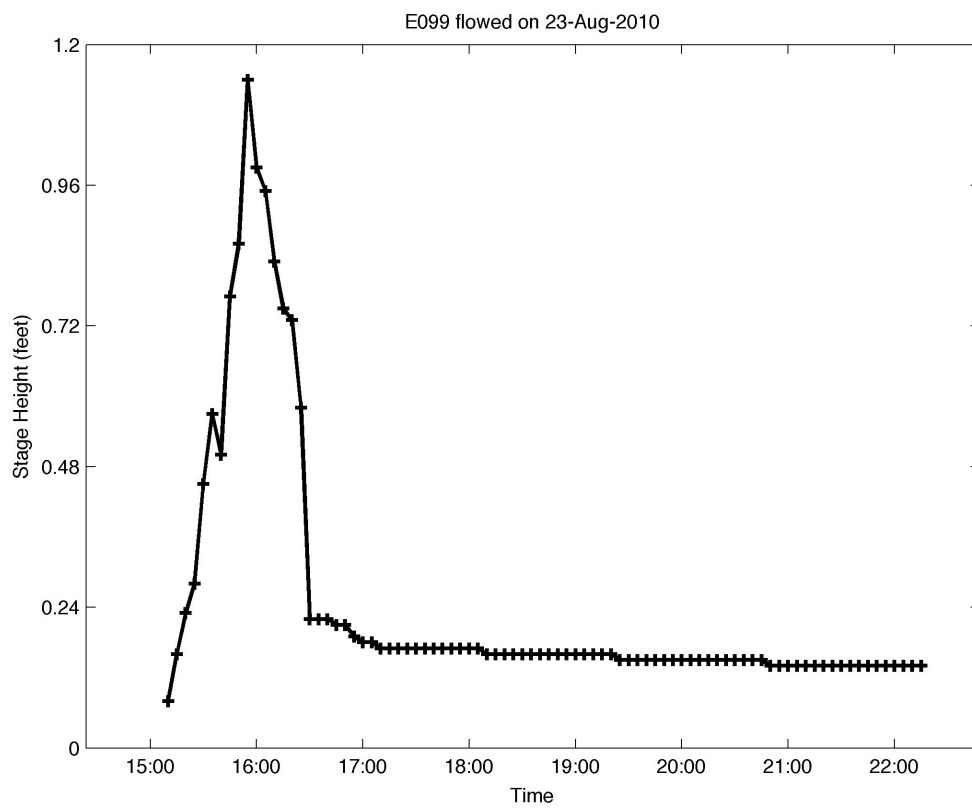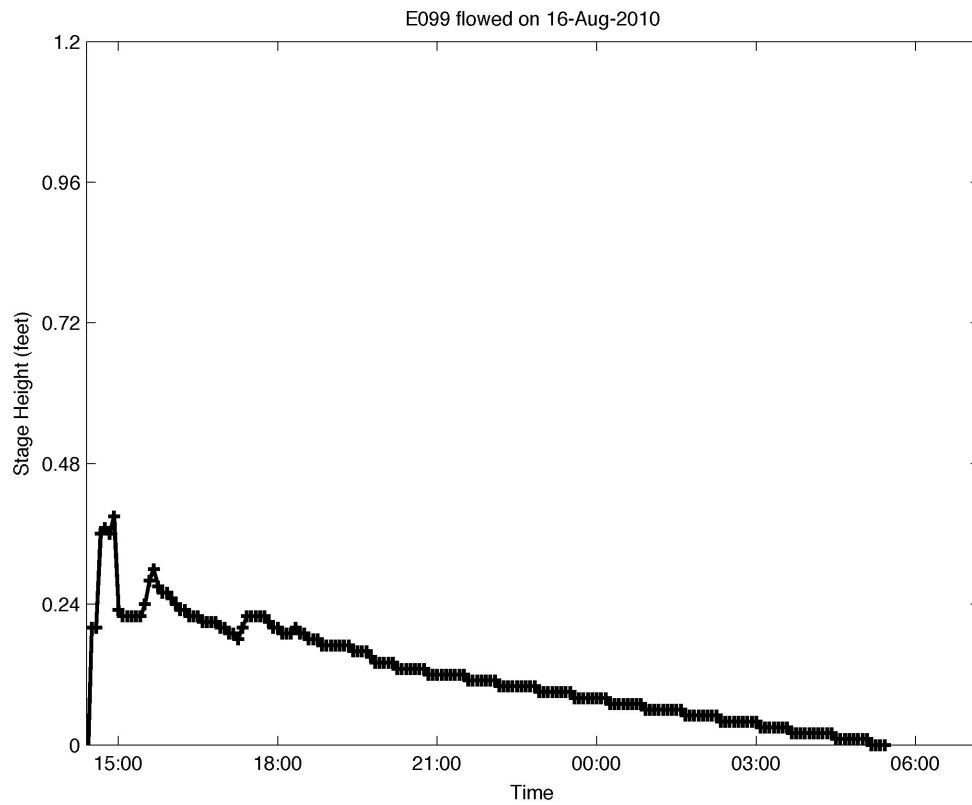

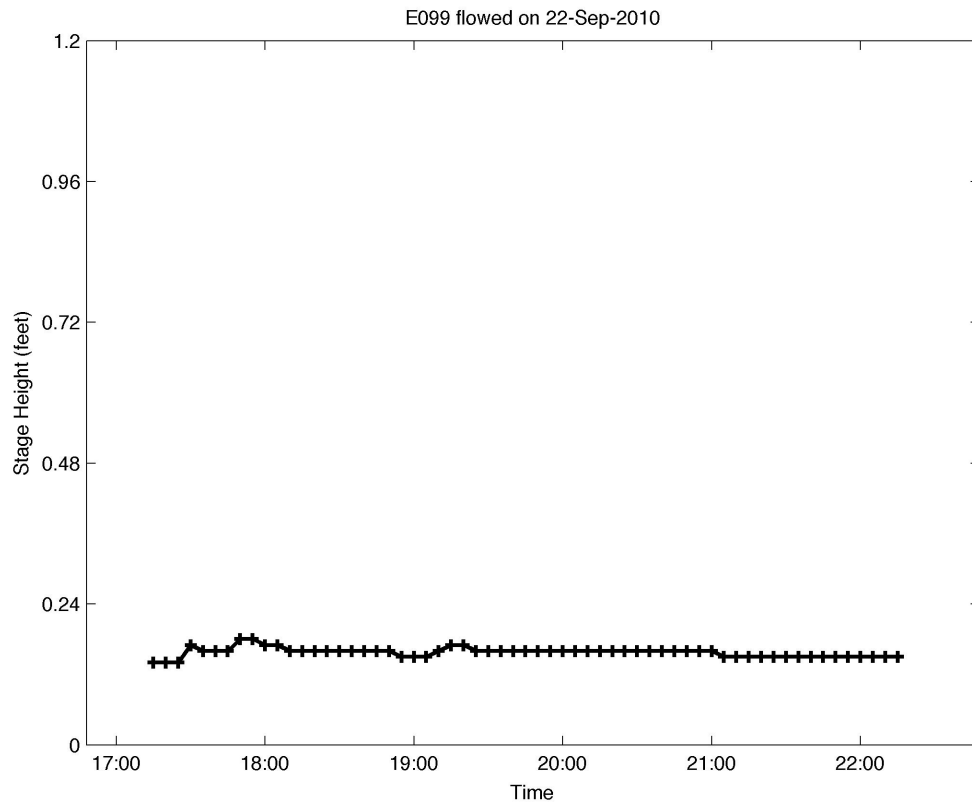

Appendix B

*Analytical Results and 5-Minute Discharge Results
(on CD included with this document)*

This appendix presents (on CD included with this report) the analytical suites and results for the monitoring conducted in the Los Alamos/Pueblo Canyon Watershed during 2010. Also presented are 5-minute discharge results at each gage for the monitoring period from May 1, 2010, through October 30, 2010.

Appendix C

*Acronyms and Abbreviations,
Metric Conversion Table, and Data Qualifier Definitions*

C-1.0 ACRONYMS AND ABBREVIATIONS

DOE	Department of Energy (U.S.)
IMWP	interim measure work plan
LANL	Los Alamos National Laboratory
LA/P	Los Alamos/Pueblo
LIDAR	light detecting and ranging
NMED	New Mexico Environment Department
NMWQCC	New Mexico Water Quality Control Commission
OB	DOE Oversight Bureau (NMED)
PCB	polychlorinated biphenyl
Q	discharge rate
RPD	relative percent difference
RPF	Records Processing Facility
SIMWP	supplemental interim measure work plan
SSC	suspended sediment concentration
SWMU	solid waste management unit
TAL	target analyte list
2,3,7,8-TCDD	2,3,7,8-tetrachlorodibenzodioxin
TEF	toxicity equivalence factor
TEQ	toxic equivalent
V	runoff volume

C-2.0 METRIC CONVERSION TABLE

Multiply SI (Metric) Unit	by	To Obtain US Customary Unit
kilometers (km)	0.622	miles (mi)
kilometers (km)	3281	feet (ft)
meters (m)	3.281	feet (ft)
meters (m)	39.37	inches (in.)
centimeters (cm)	0.03281	feet (ft)
centimeters (cm)	0.394	inches (in.)
millimeters (mm)	0.0394	inches (in.)
micrometers or microns (μm)	0.0000394	inches (in.)
square kilometers (km^2)	0.3861	square miles (mi^2)
hectares (ha)	2.5	acres
square meters (m^2)	10.764	square feet (ft^2)
cubic meters (m^3)	35.31	cubic feet (ft^3)
kilograms (kg)	2.2046	pounds (lb)
grams (g)	0.0353	ounces (oz)
grams per cubic centimeter (g/cm^3)	62.422	pounds per cubic foot (lb/ft^3)
milligrams per kilogram (mg/kg)	1	parts per million (ppm)
micrograms per gram ($\mu\text{g/g}$)	1	parts per million (ppm)
liters (L)	0.26	gallons (gal.)
milligrams per liter (mg/L)	1	parts per million (ppm)
degrees Celsius ($^{\circ}\text{C}$)	$9/5 + 32$	degrees Fahrenheit ($^{\circ}\text{F}$)

C-3.0 DATA QUALIFIER DEFINITIONS

Data Qualifier	Definition
U	The analyte was analyzed for but not detected.
J	The analyte was positively identified, and the associated numerical value is estimated to be more uncertain than would normally be expected for that analysis.
J+	The analyte was positively identified, and the result is likely to be biased high.
J-	The analyte was positively identified, and the result is likely to be biased low.
UJ	The analyte was not positively identified in the sample, and the associated value is an estimate of the sample-specific detection or quantitation limit.
R	The data are rejected as a result of major problems with quality assurance/quality control (QA/QC) parameters.

